

APPLICATIONS / MARKETS













Illumination

1 - Base Voltage

Voltage

Options

SPECIFICATIONS

Electrical Rating: 2A, 36VDC Electrical Life: 200,000 Cycles

Contact Resistance: 50mΩ Max. at 1A 12VDC Dielectric Strength: 2,000V RMS at sea level Operating/Storage Temperature: -20°C to 70°C

Travel: 1.80mm

Moisture Protection: IP67 **Contact Arrangement: SPST** Actuation Force: 4.5 N Panel Thickness: 1-6mm Mounting Nut Torque: 1-3Nm

FEATURES & BENEFITS

- · Short body design
- 19mm diameter panel cutout
- **Multiple LED options**
- Ring or Ring/Power symbol illumination available
- IP67 rated
- **SPST**
- · Soldered wire leads (500mm long) optional

PART NUMBER CONFIGURATOR

Actuator Series Options SV4 F - Flat

Terminal Options

2 - Solder

W - Wire Leads

500mm long

Function Options

3 - 1 Pole

Off - (On)*

Body Finish **Options**

S - Stainless

Steel

Actuator Finish **Options**

S - Stainless Steel

Lens Style **Options**

3 - Ring moveable

with Actuator 6 - Ring /Power moveable with Actuator

LED-Color **Options**

0 - White

1 - Red 3 - Green


4 - Blue 5 - Yellow


G - Red/Green H - Red/Blue


*() denotes function is momentary


Specifications subject to change without notice 3.5.2020


BODY DIMENSIONS

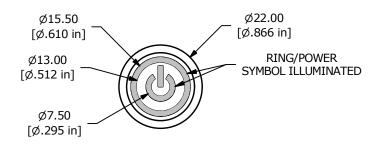

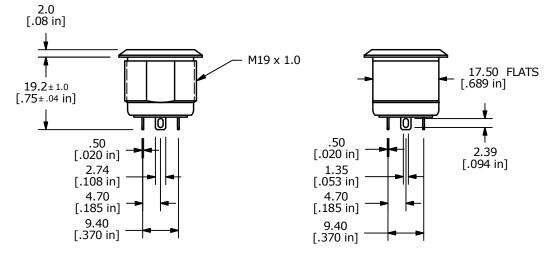


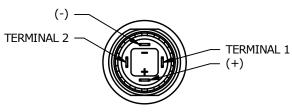

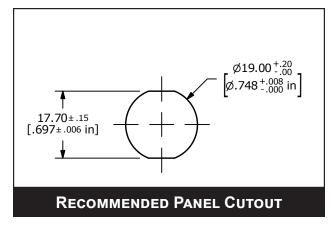

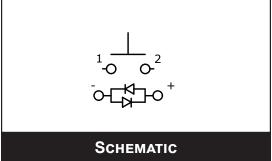



ACUATOR OPTIONS

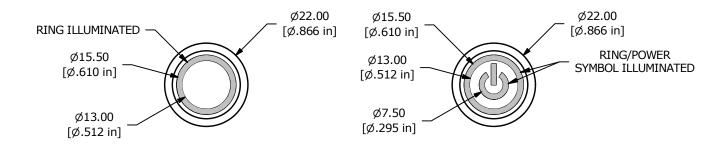

WIRE LEAD OPTION

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 20AWG AWM UL3385, BLACK	500.0 [19.7 in]
SW1-2	WIRE, 20AWG AWM UL3385, BLACK	500.0 [19.7 in]
SW1- (-)	WIRE, 20AWG AWM UL3385, GREEN	500.0 [19.7 in]
SW1- (+)	WIRE, 20AWG AWM UL3385, RED	500.0 [19.7 in]

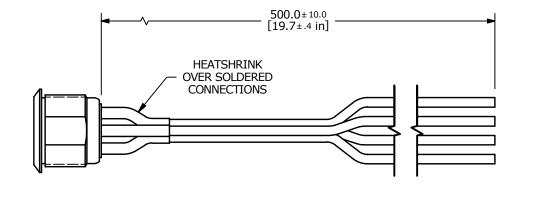



BOTTOM VIEW SHOWN WITHOUT WIRING