




connectors




Fuel Gauge

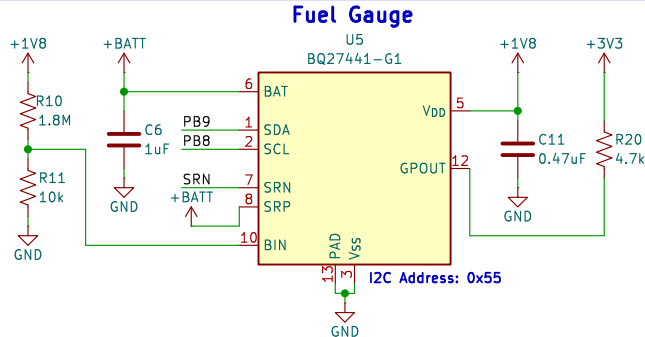


600mA Charger

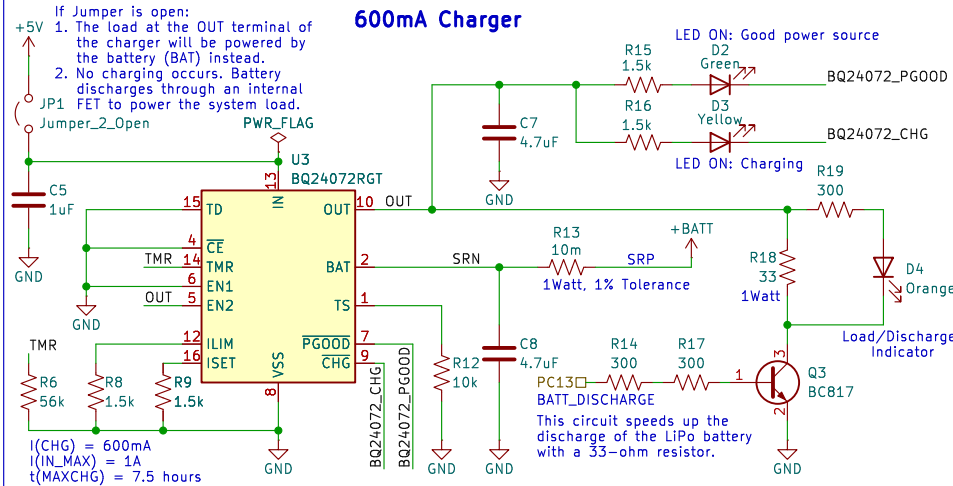


Buzzer

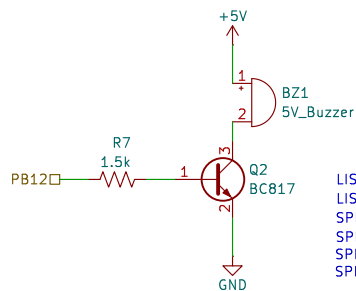


Accelerometer

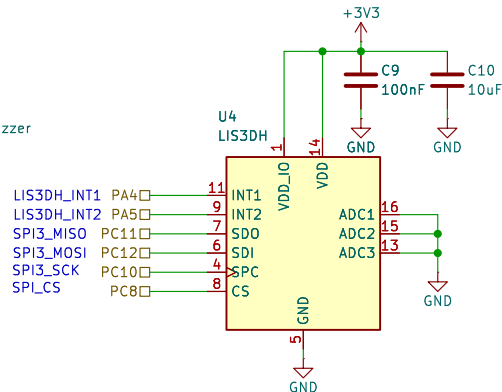


7 Segment Display

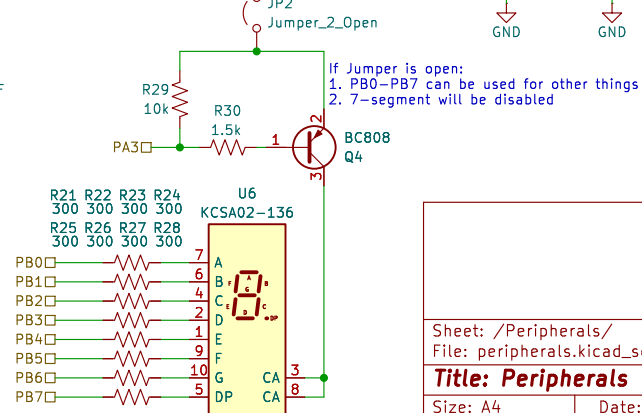


User Button




User LED




Liquid Crystal Display

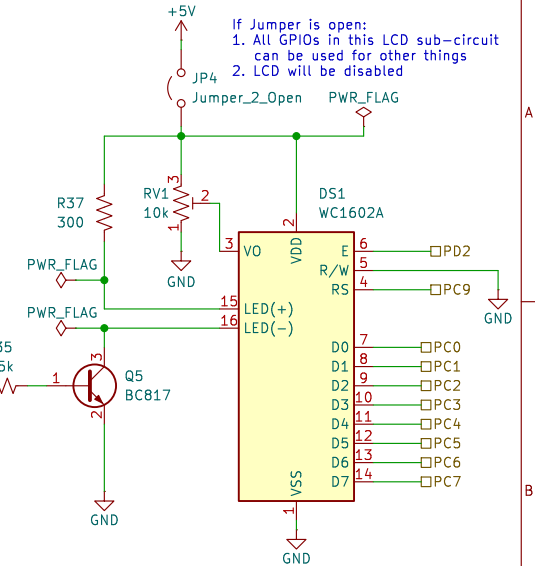


Temperature Sensor



CAN Transceiver

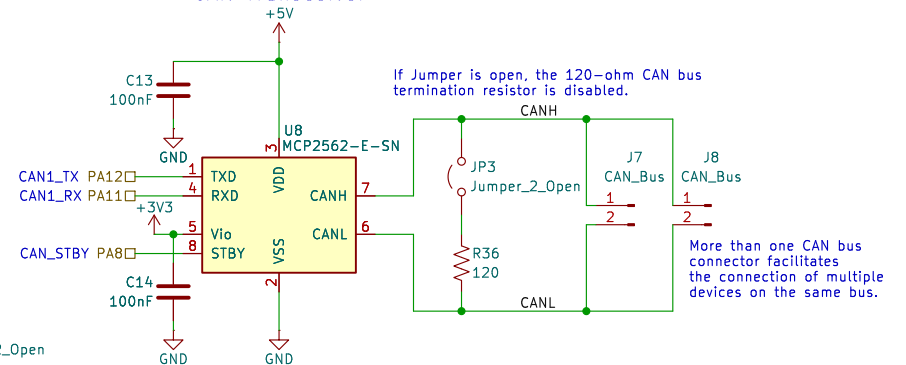

I2C/SMBus Pull-up Resistors




Sheet: /Peripherals/
File: peripherals.kicad_sch

Title: *Peripherals*

Size: A4	Date: 2026-03-05
KiCad E.D.A. 9.0.6	

Rev: 1.0
Id: 2/3

Microcontroller (MCU)

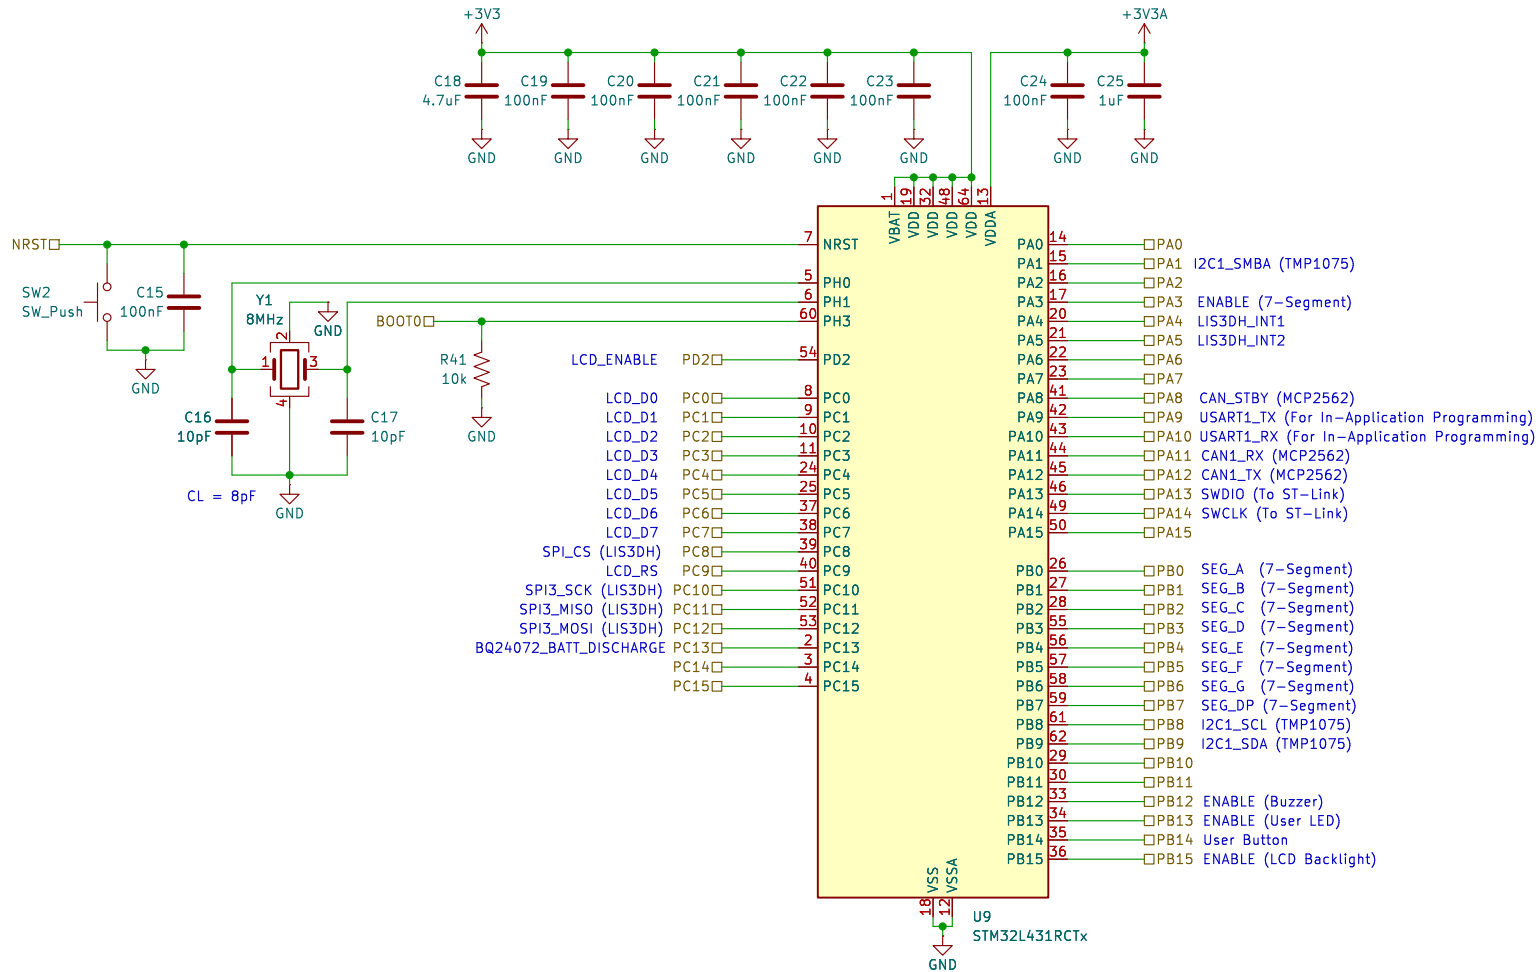

In-Application Programming (IAP):
USART1 (PA9 and PA10) can be used for
flashing new firmware to the MCU
through ST's system bootloader
or a custom one.

Sheet: /Microcontroller/
File: microcontroller.kicad_sch

Title: Microcontroller

Size: A4 Date: 2026-03-05

KiCad E.D.A. 9.0.6

Rev: 1.0

Id: 3/3