


x: Don't care

Jumper setting	SW1	SW2	SW5	SW6
SPIM-NOR	Low	Low	Low	x
SPIM-NAND	High	Low	High	x
eMMC	Low	High	x	Low
SD	High	High	x	High



```
SNFI-NAND(None support , internal use)
```



SNFI-NAND datasheet 沒support, 而且现在bootstrap 要SNFI 写的才会到SD




Boot Strapping

Pin Name	Description	Boot Sequence
{GPIO_1,GPIO_0}	Boot mode	00: SPIM-NOR (SPI2) 01: SPIM-NAND (SPI2) 10: eMMC 5.1(1.8V) 11: SNPI-SD Card
{GPIO_3}	A-Die Mode	0: 2 A-Die/1 Adie SB 1: 1 A-die D8DC
UART TX0	Second A Die Xtal mode	0: XTAL mode 1: Buffer mode
PWM0	40MHz/80MHz Xtal select	0: Reserved 1: 40MHz
SYS_WATCHDOG	CPU 1.023V/ 0.85V select	0: 0.85V 1: 1.023V

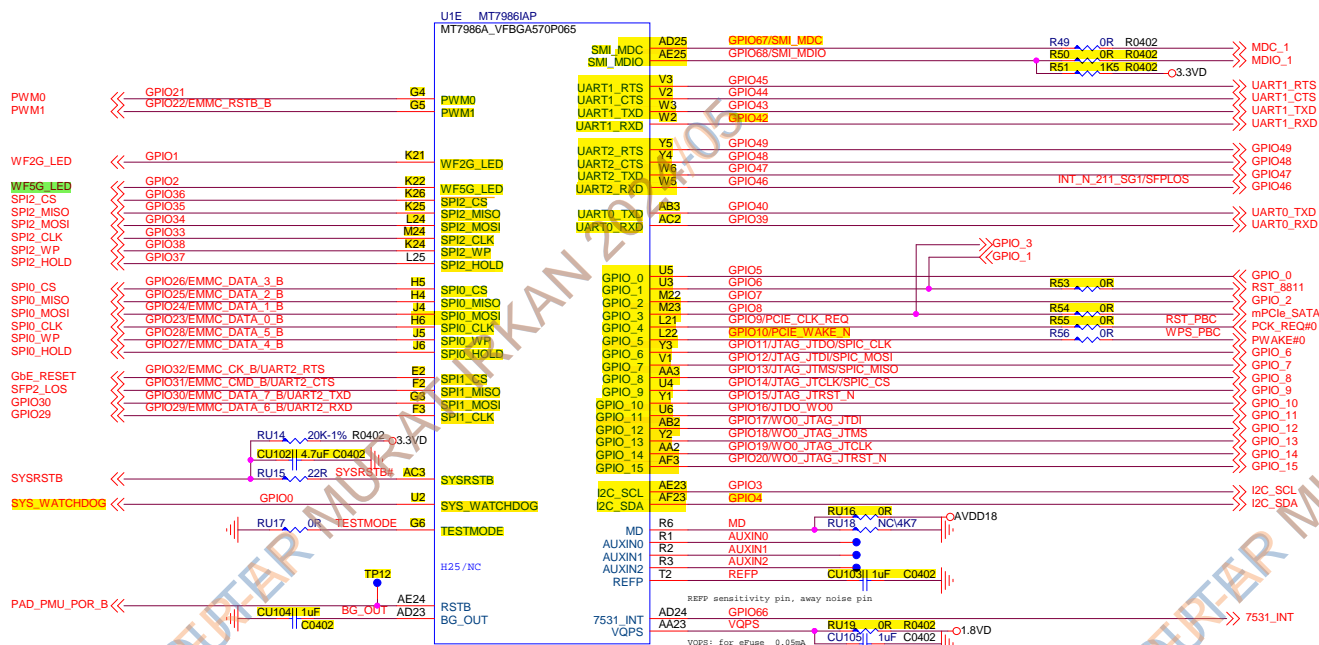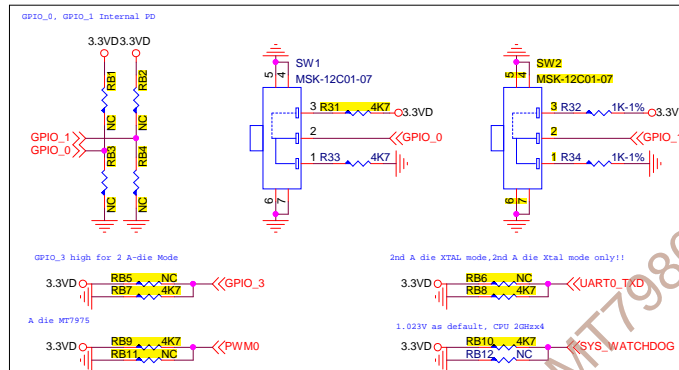


MEDIA TEK

SFP 2.5G LAN

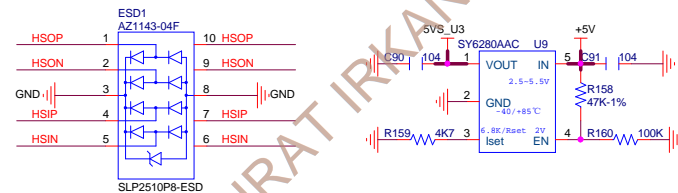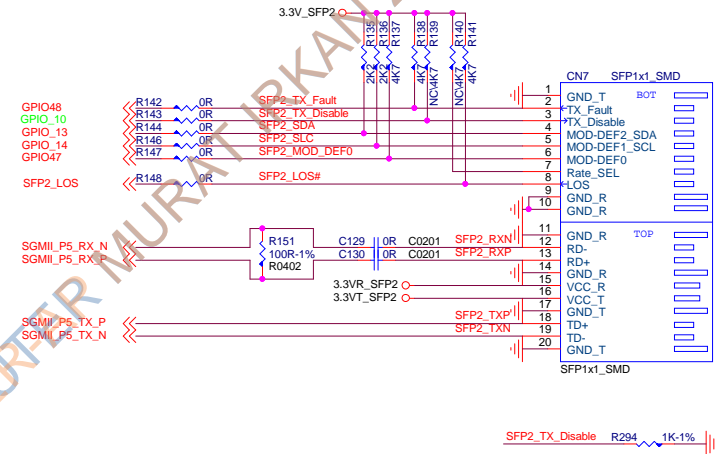

DCIN 12v

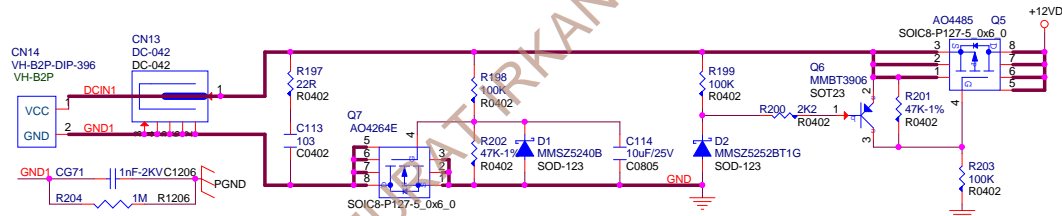

+5V: 5.1V/3A

