






XIOMI REDMI NOTE 4-MEDIATEK MT6797

09/18/2026

猎人电子图

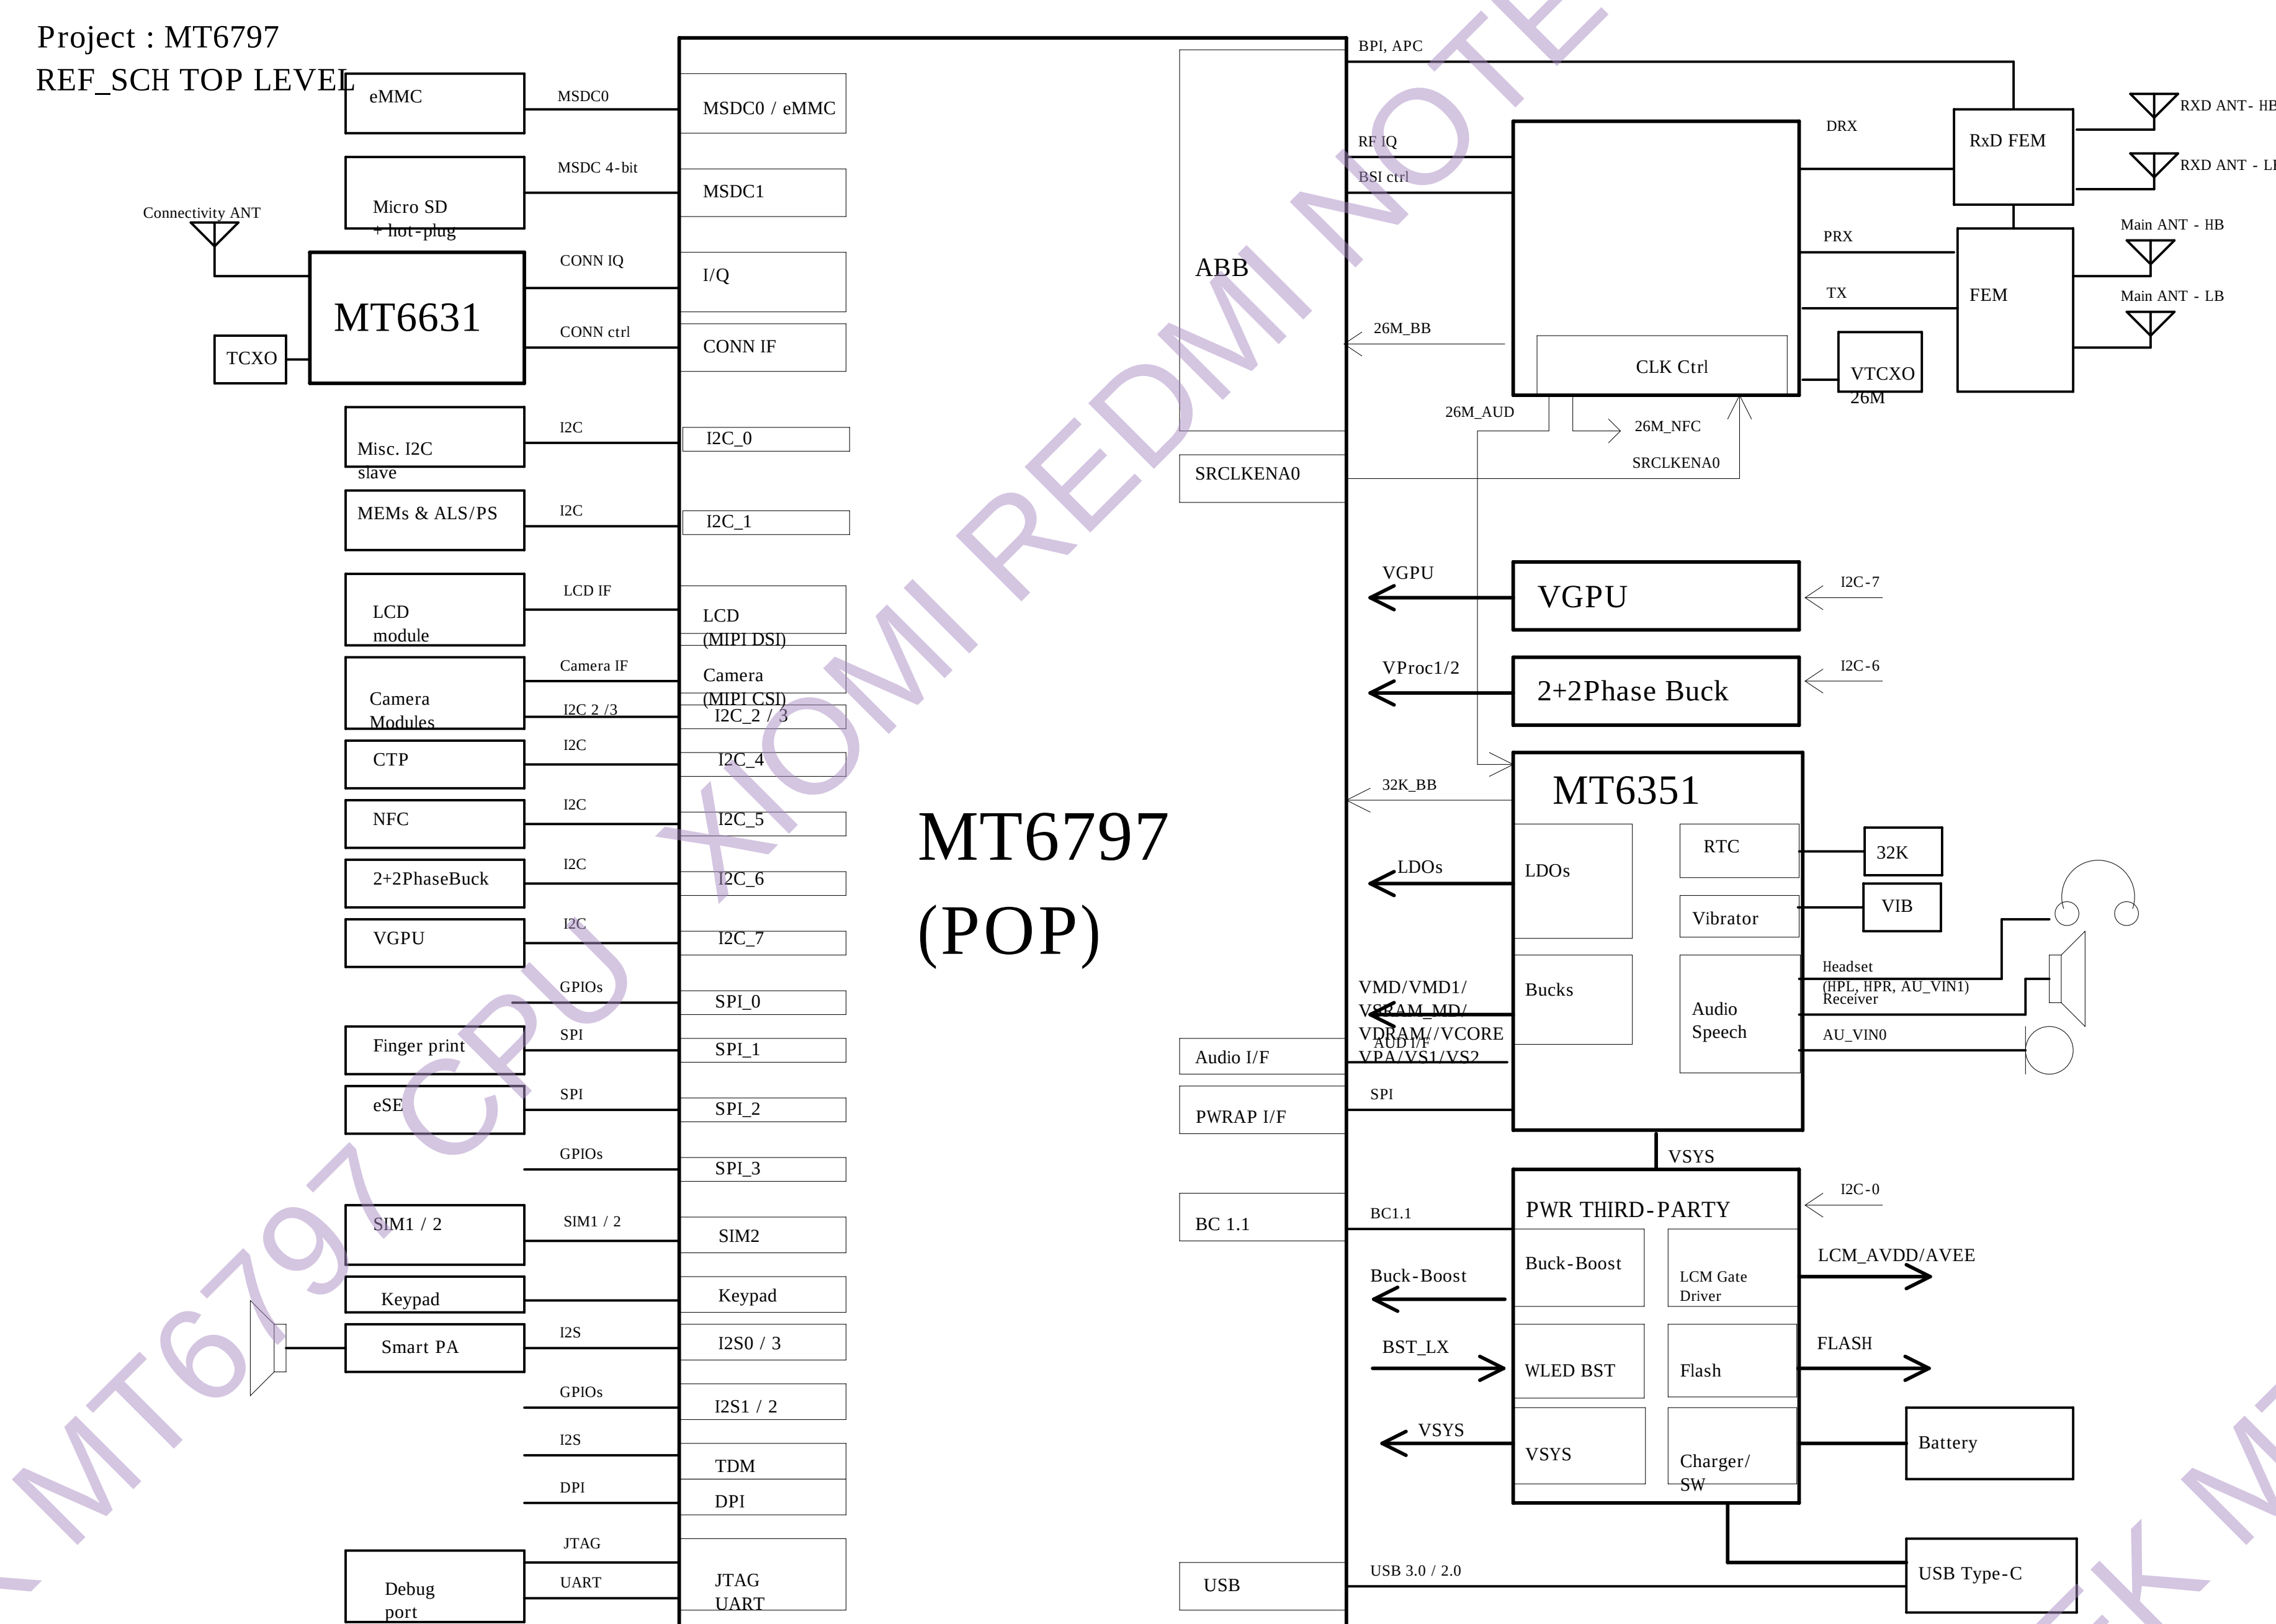

DRAWN <Drawn By>		DATE <Drawn Date>		CX880			
CHECKED <Checked By>		DATE <Checked Date>					
QUALITY CONTROL <QC By>		DATE <QC Date>		CODE <Code>	DRAWING NO. A0 <Drawing Number>×Revision>		REV.
RELEASED <Released By>		DATE <Release Date>		SCALE <Scale>	SHEET 40 20		

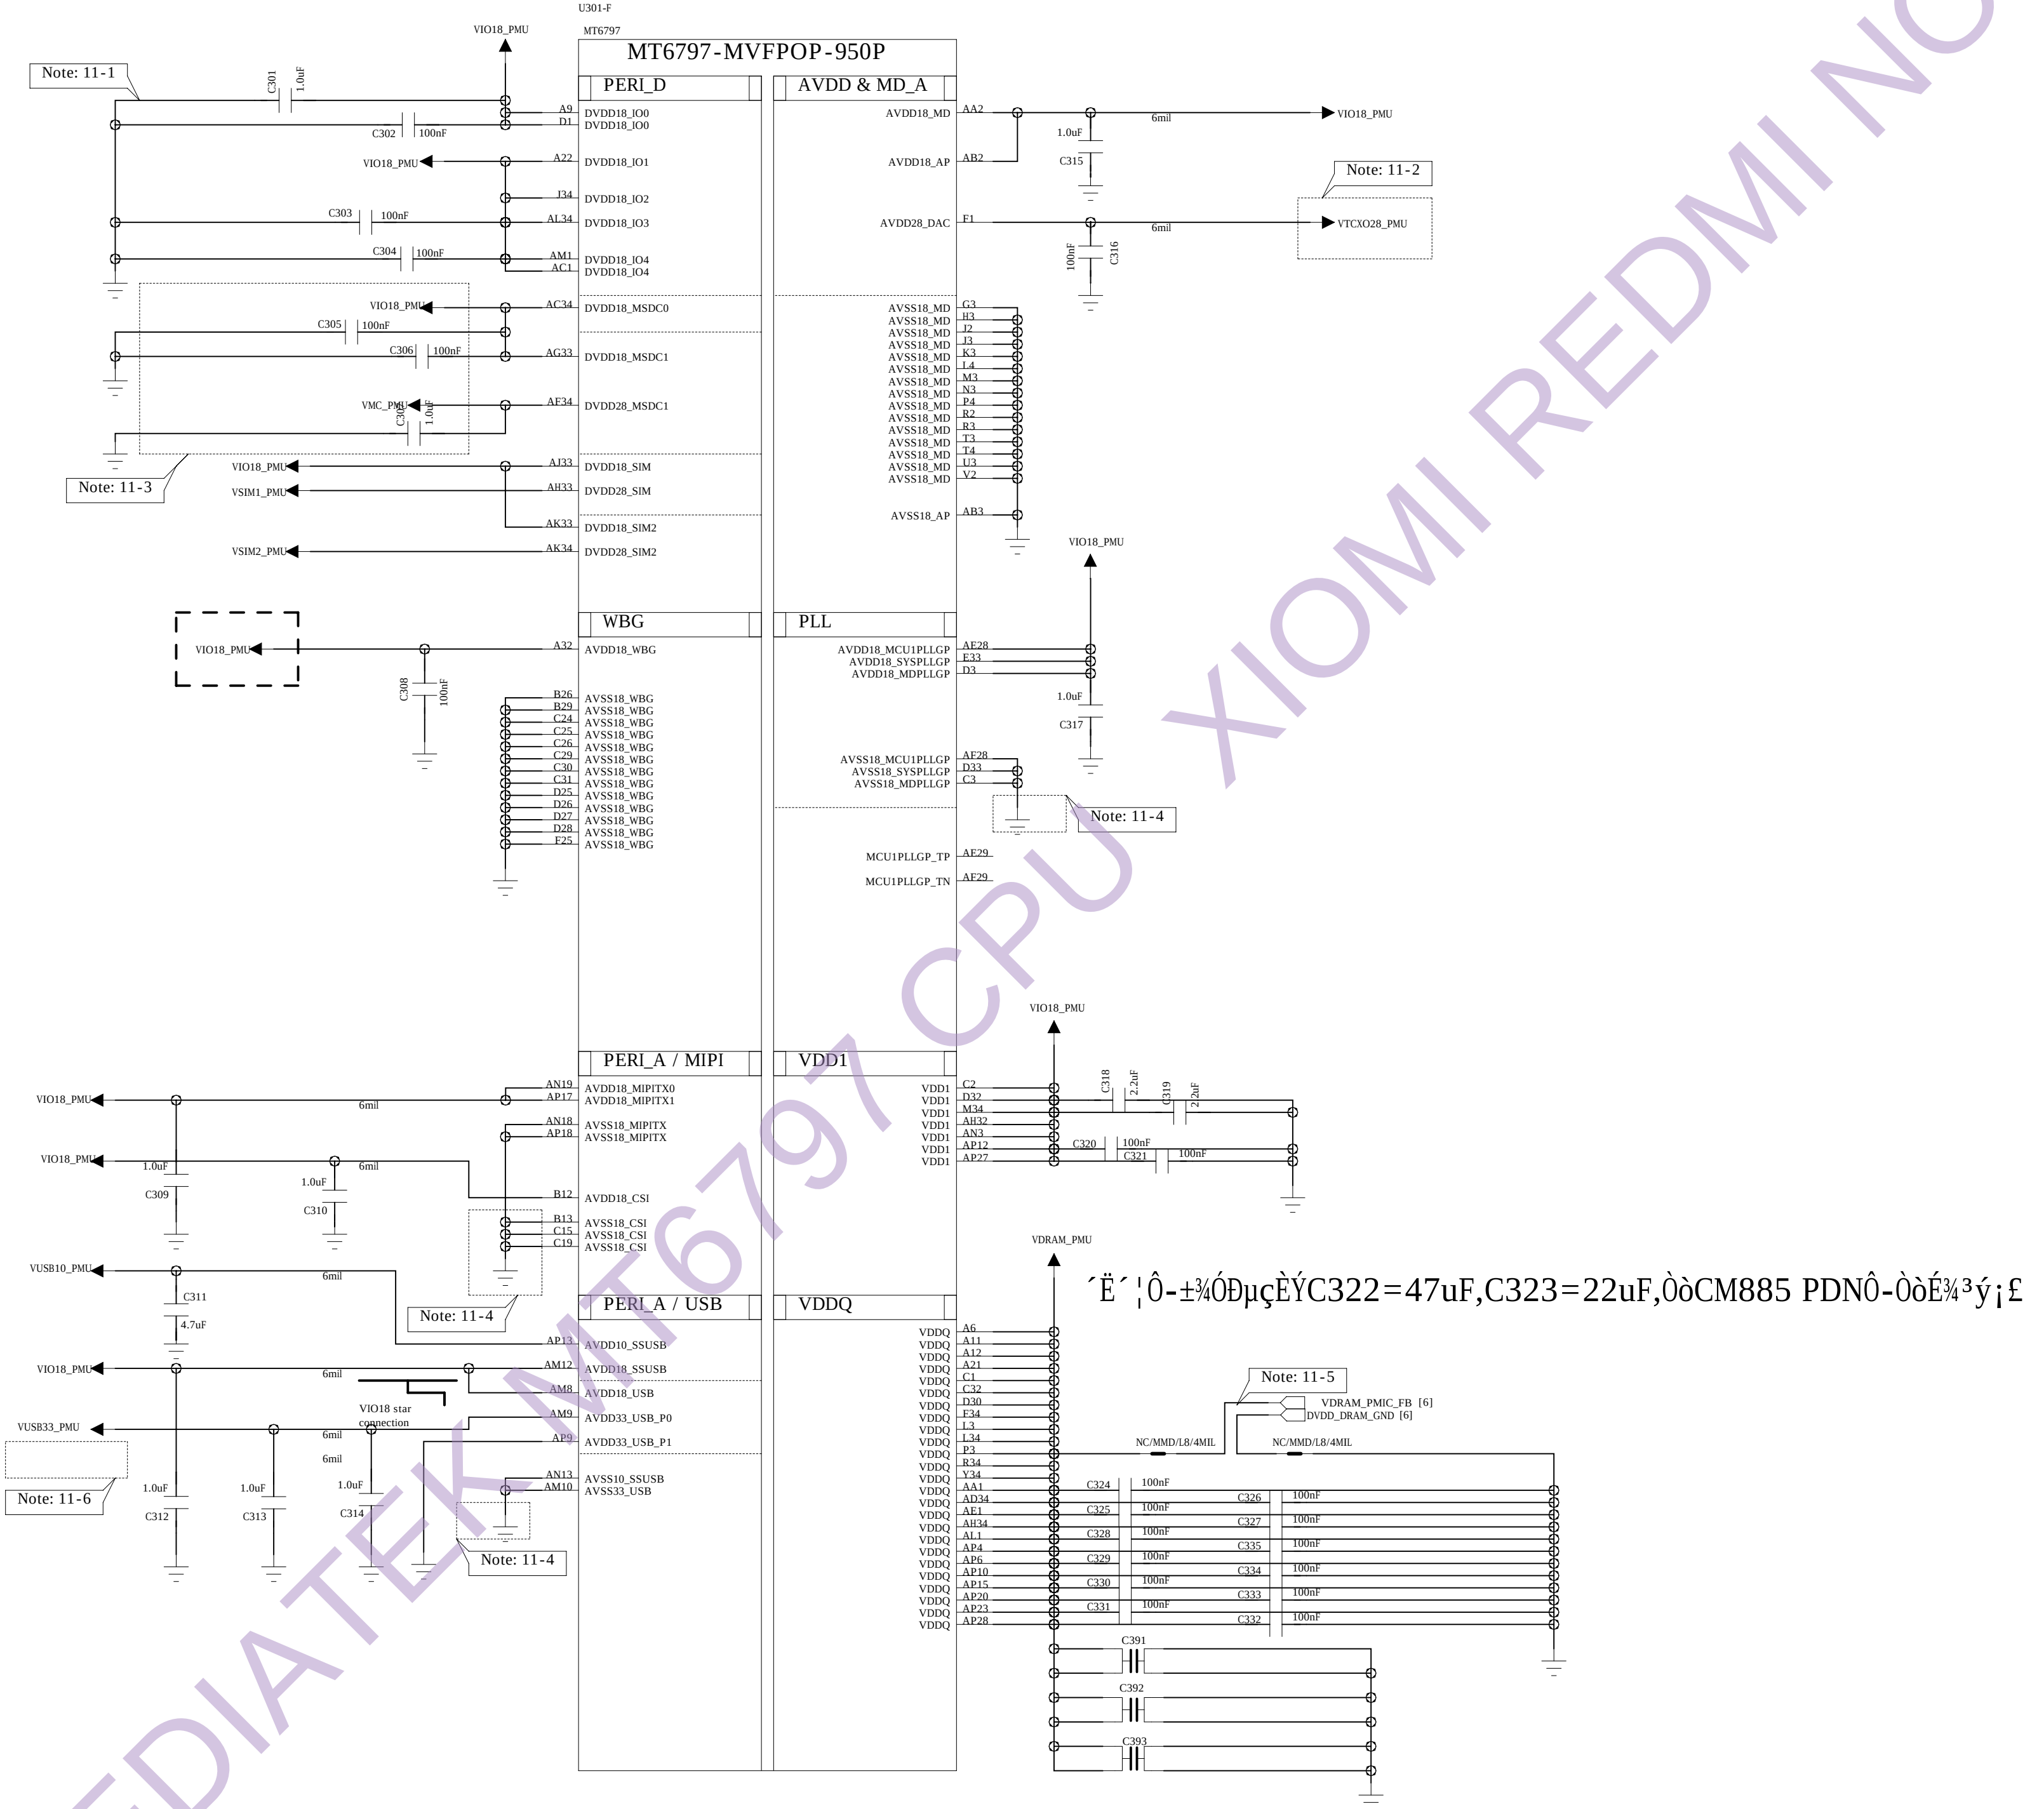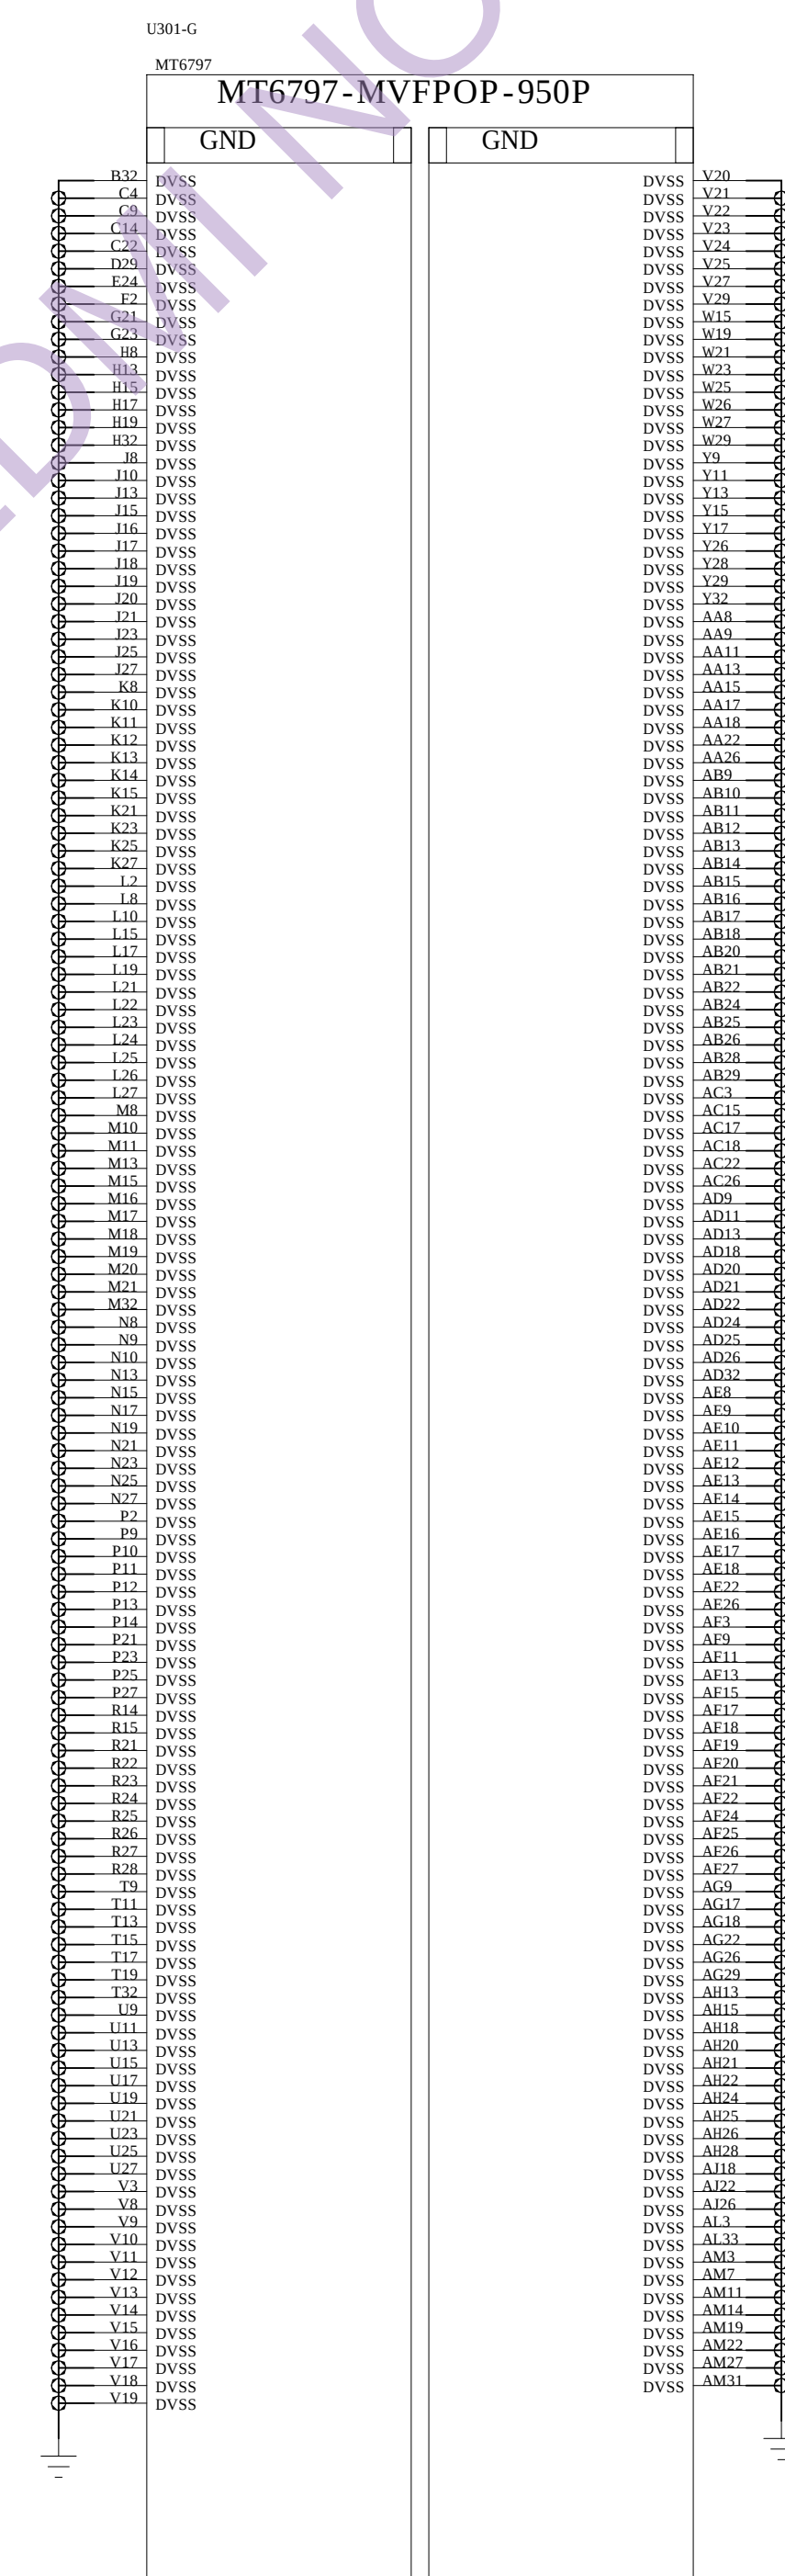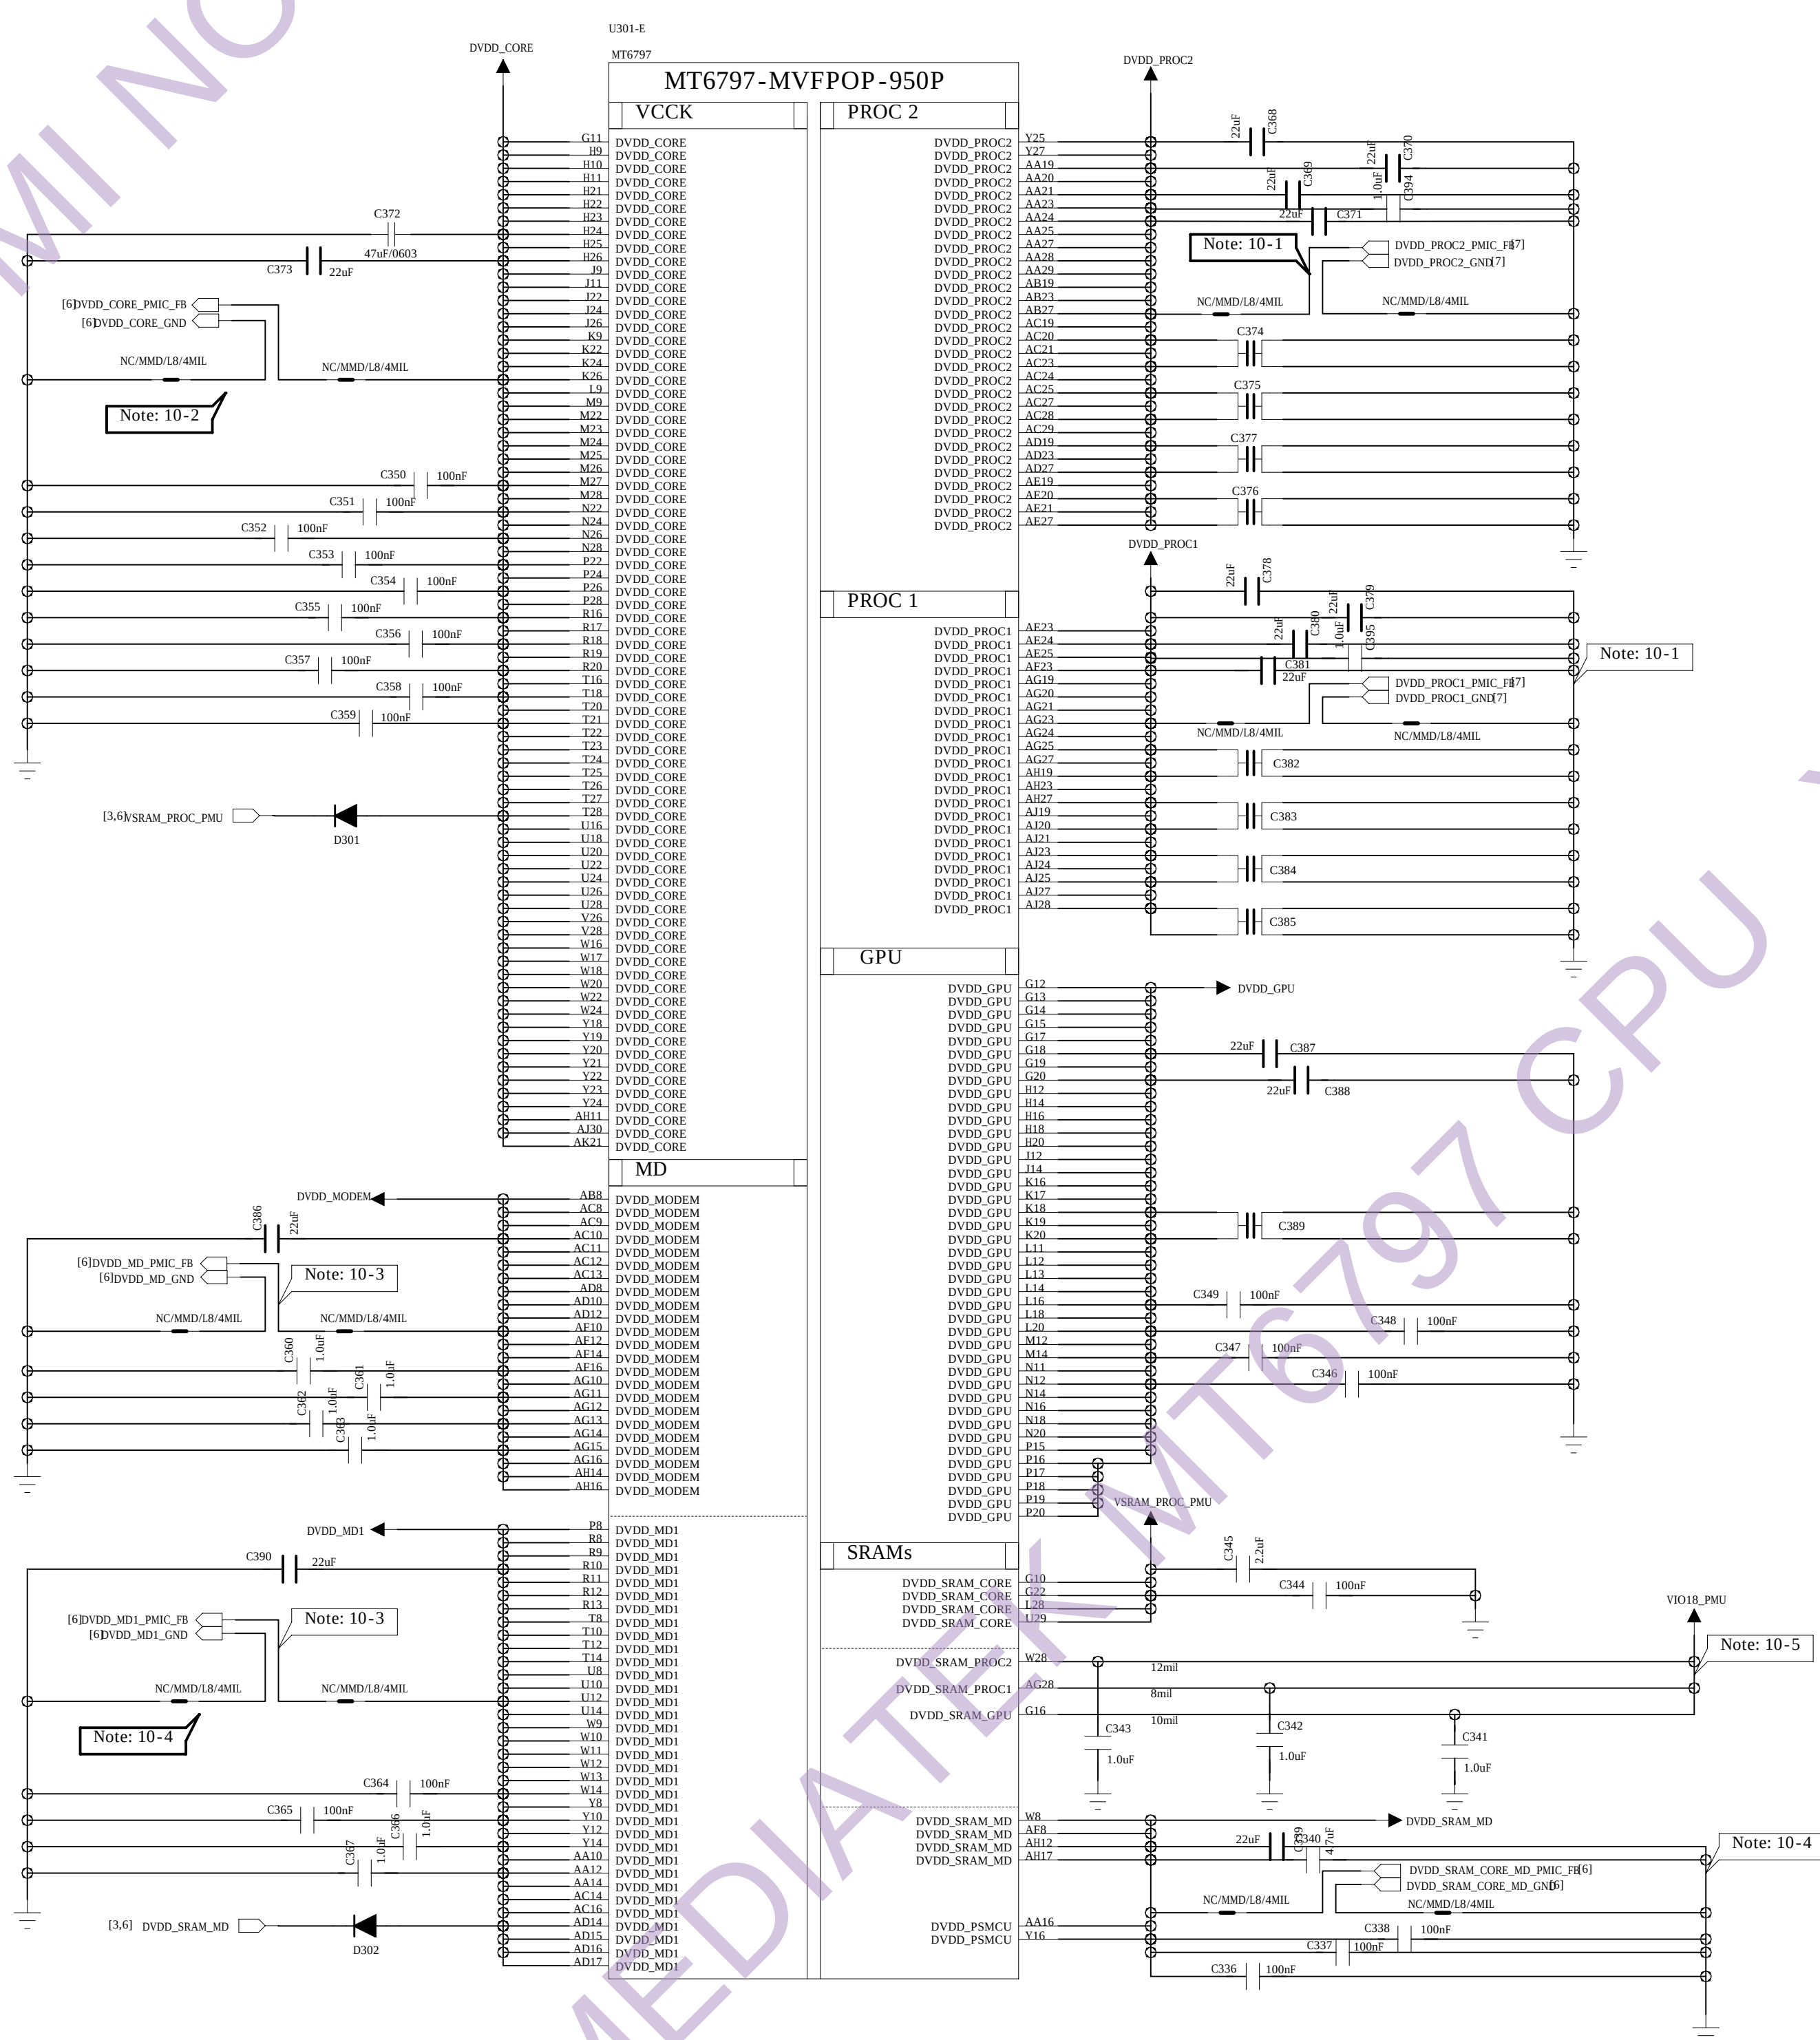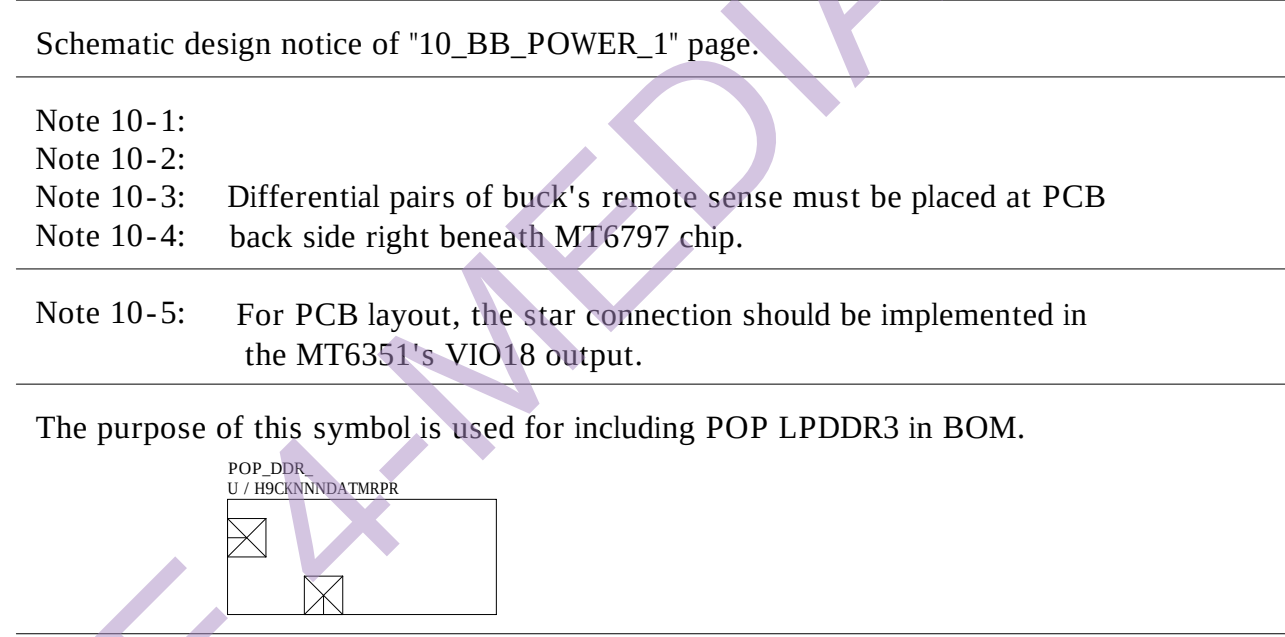

		COMPANY:		LC	
		TITLE:		CX880	
DRAWN: ◁ Drawn By ▷	DATED: ◁ Drawn Date ▷	CHECKED: ◁ Checked By ▷	CHECKED DATE: ◁ Checked Date ▷	CODE:	SIZE:
				(DRAWING NO):	REV:
QUALITY CONTROL: ◁ QC By ▷		◁ QC Date ▷		◁ Code ▷ A0 ◁ Drawing Number ▷ ◁ Revision ▷	
RELEASED: ◁ Released By ▷	DATE: ◁ Release Date ▷			SCALE:	◁ Scale ▷
				SHEET:	of 20

D

C

B

A


D

C

B

A

REVISION RECORD			
LTB	ECO NO.	APPROVED	DATE

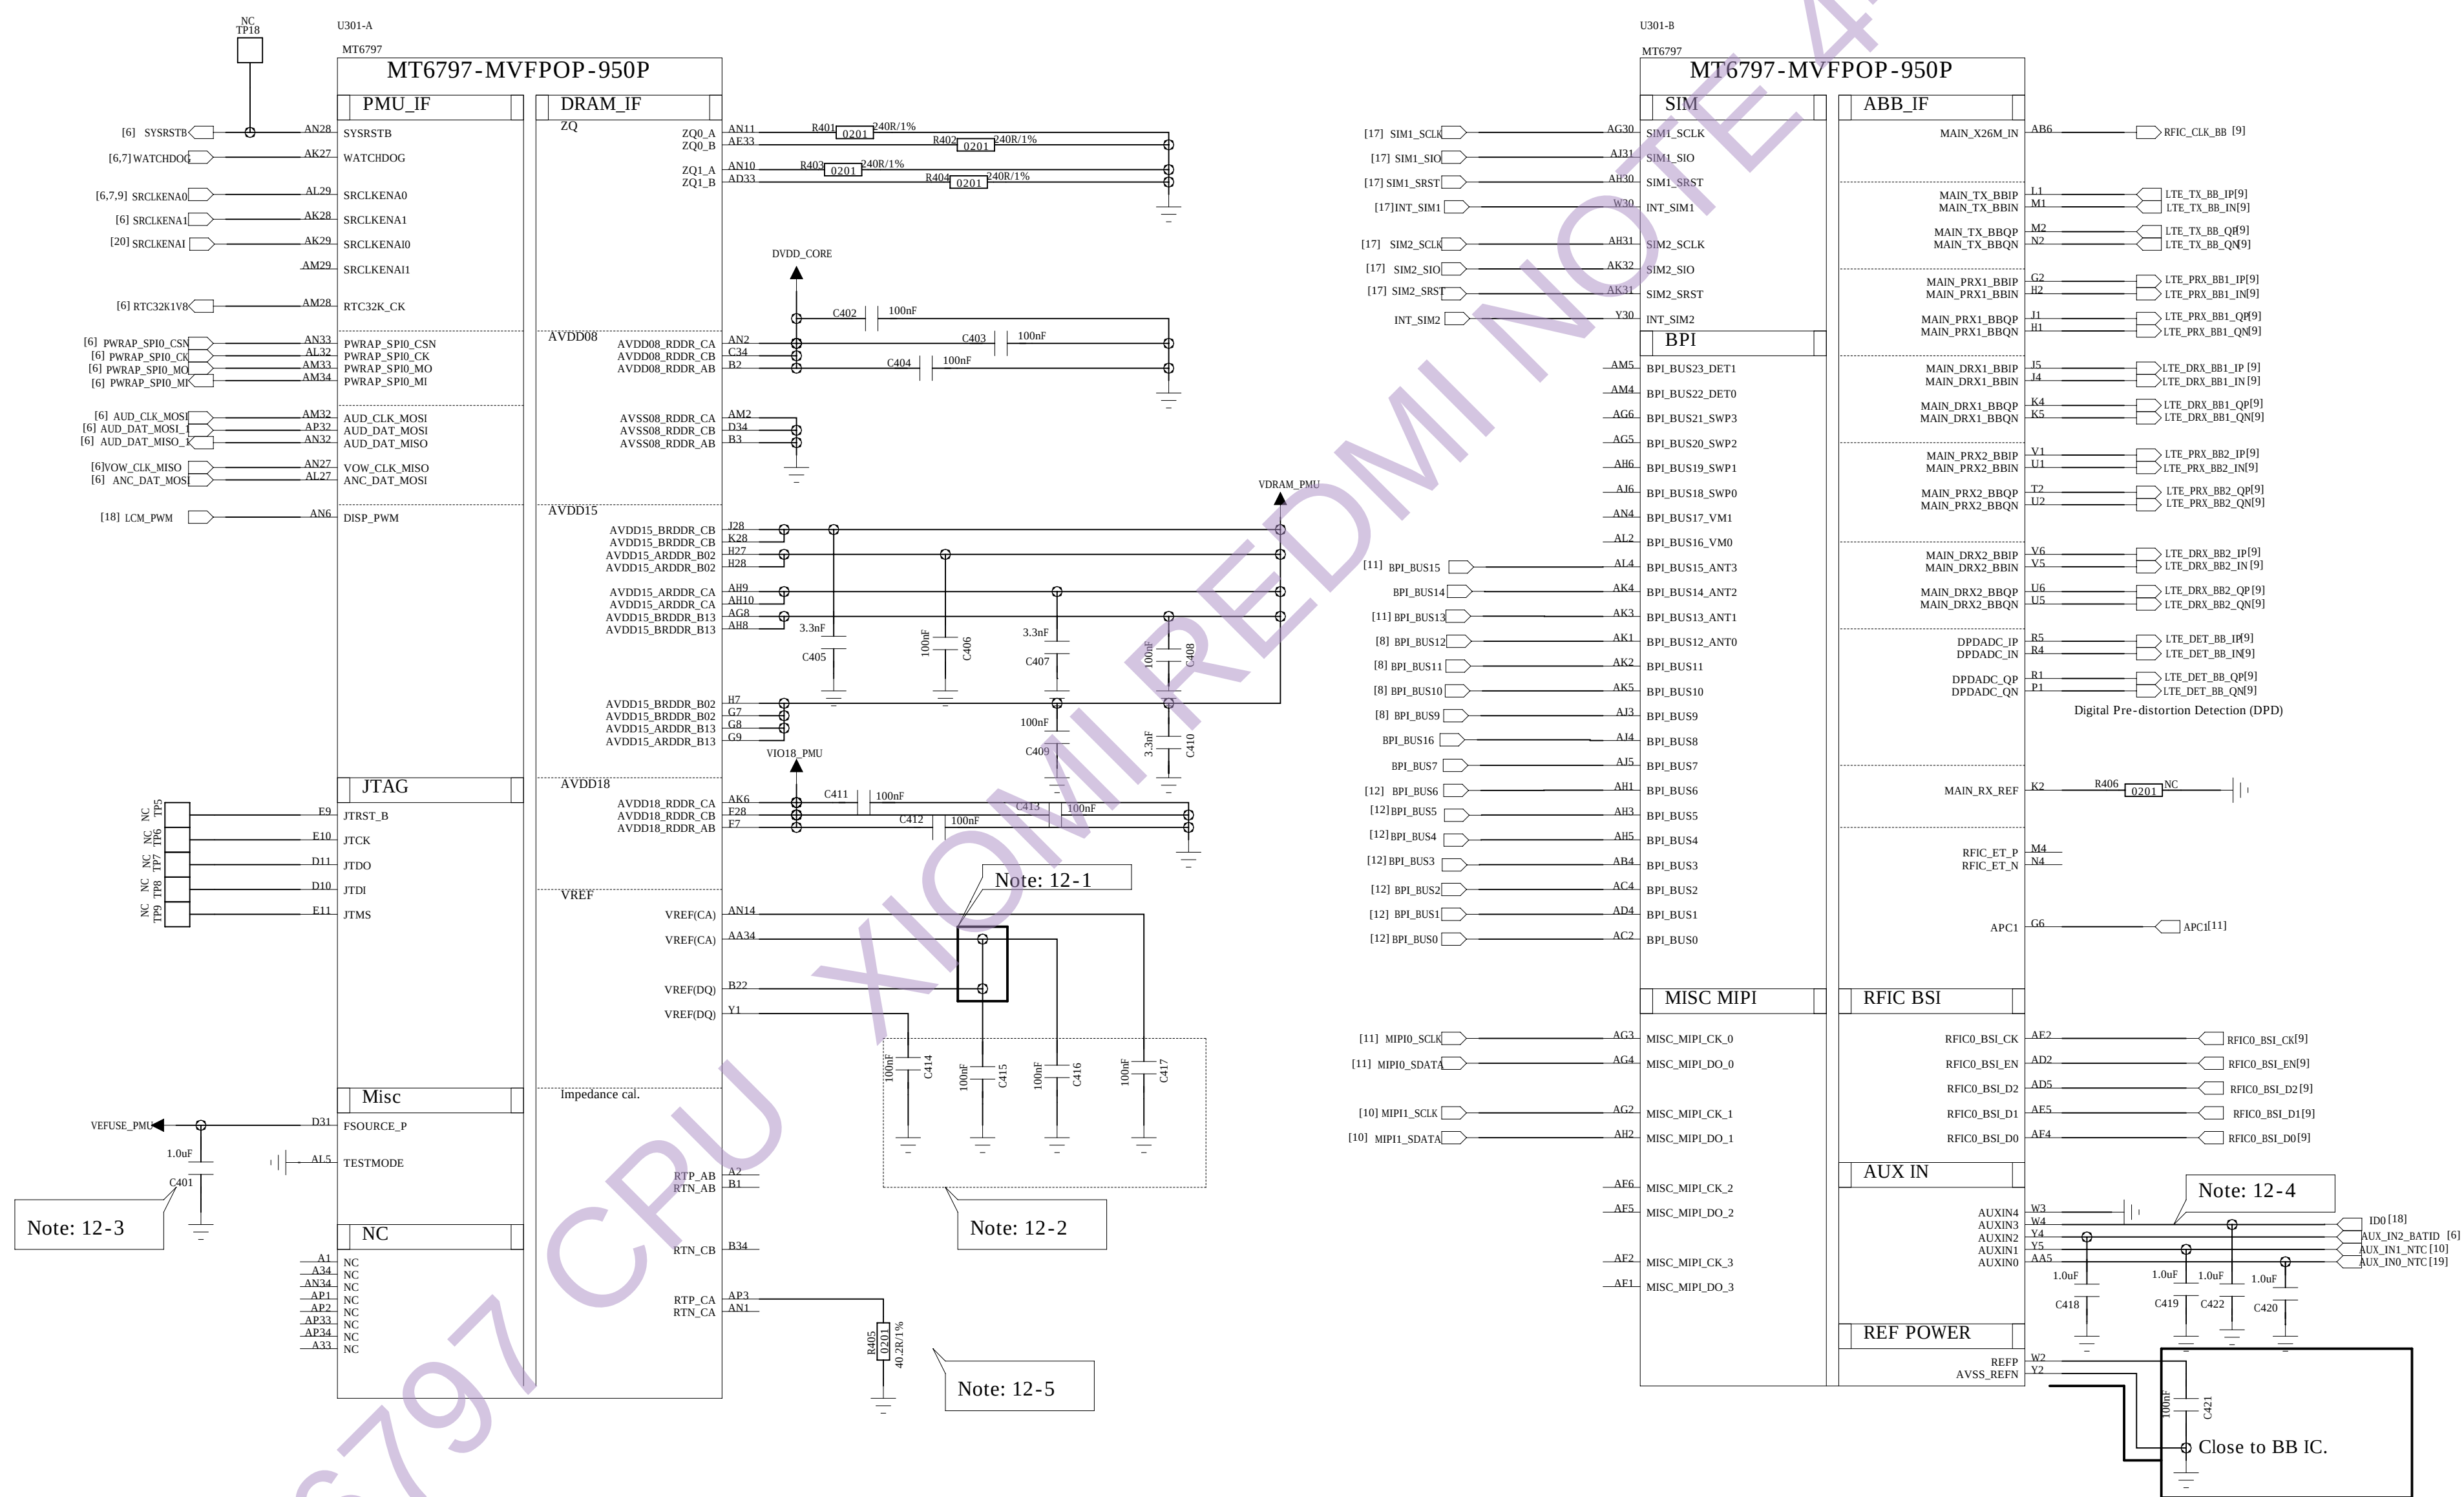

Schematic design notice of "11_BB_11" page.

Note 12-1: The DRAM's VREF(CA)AA34 ball must connect to VREF(DQ)B22 ball.

Note 12-2: The de-coupling cap. of DRAM VREF have to be placed as close to BB as possible.

Note 12-3: Apply 1.8V to FSOURCE_P (D31) for eFuse programming.

Note 12-4: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.

Note 12-5: For impedance calibration of DDRPHY

COMPANY: LC

TITLE: CX880

DRAWN: <Drawn By>	DATE: <Drawn Date>	CORE:	SIZE:	DRAWING NO:	REV:
CHECKED: <Checked By>	DATE: <Checked Date>				
QUALITY CONTROL: <QC By>	DATE: <QC Date>				
RELEASED: <Released By>	DATE: <Release Date>				

SCALE: <Scale>

SHEET: 20

D

C

B

A


D

C

B

A

REVISION RECORD			
LTB	REV NO	APPROVED	DATE

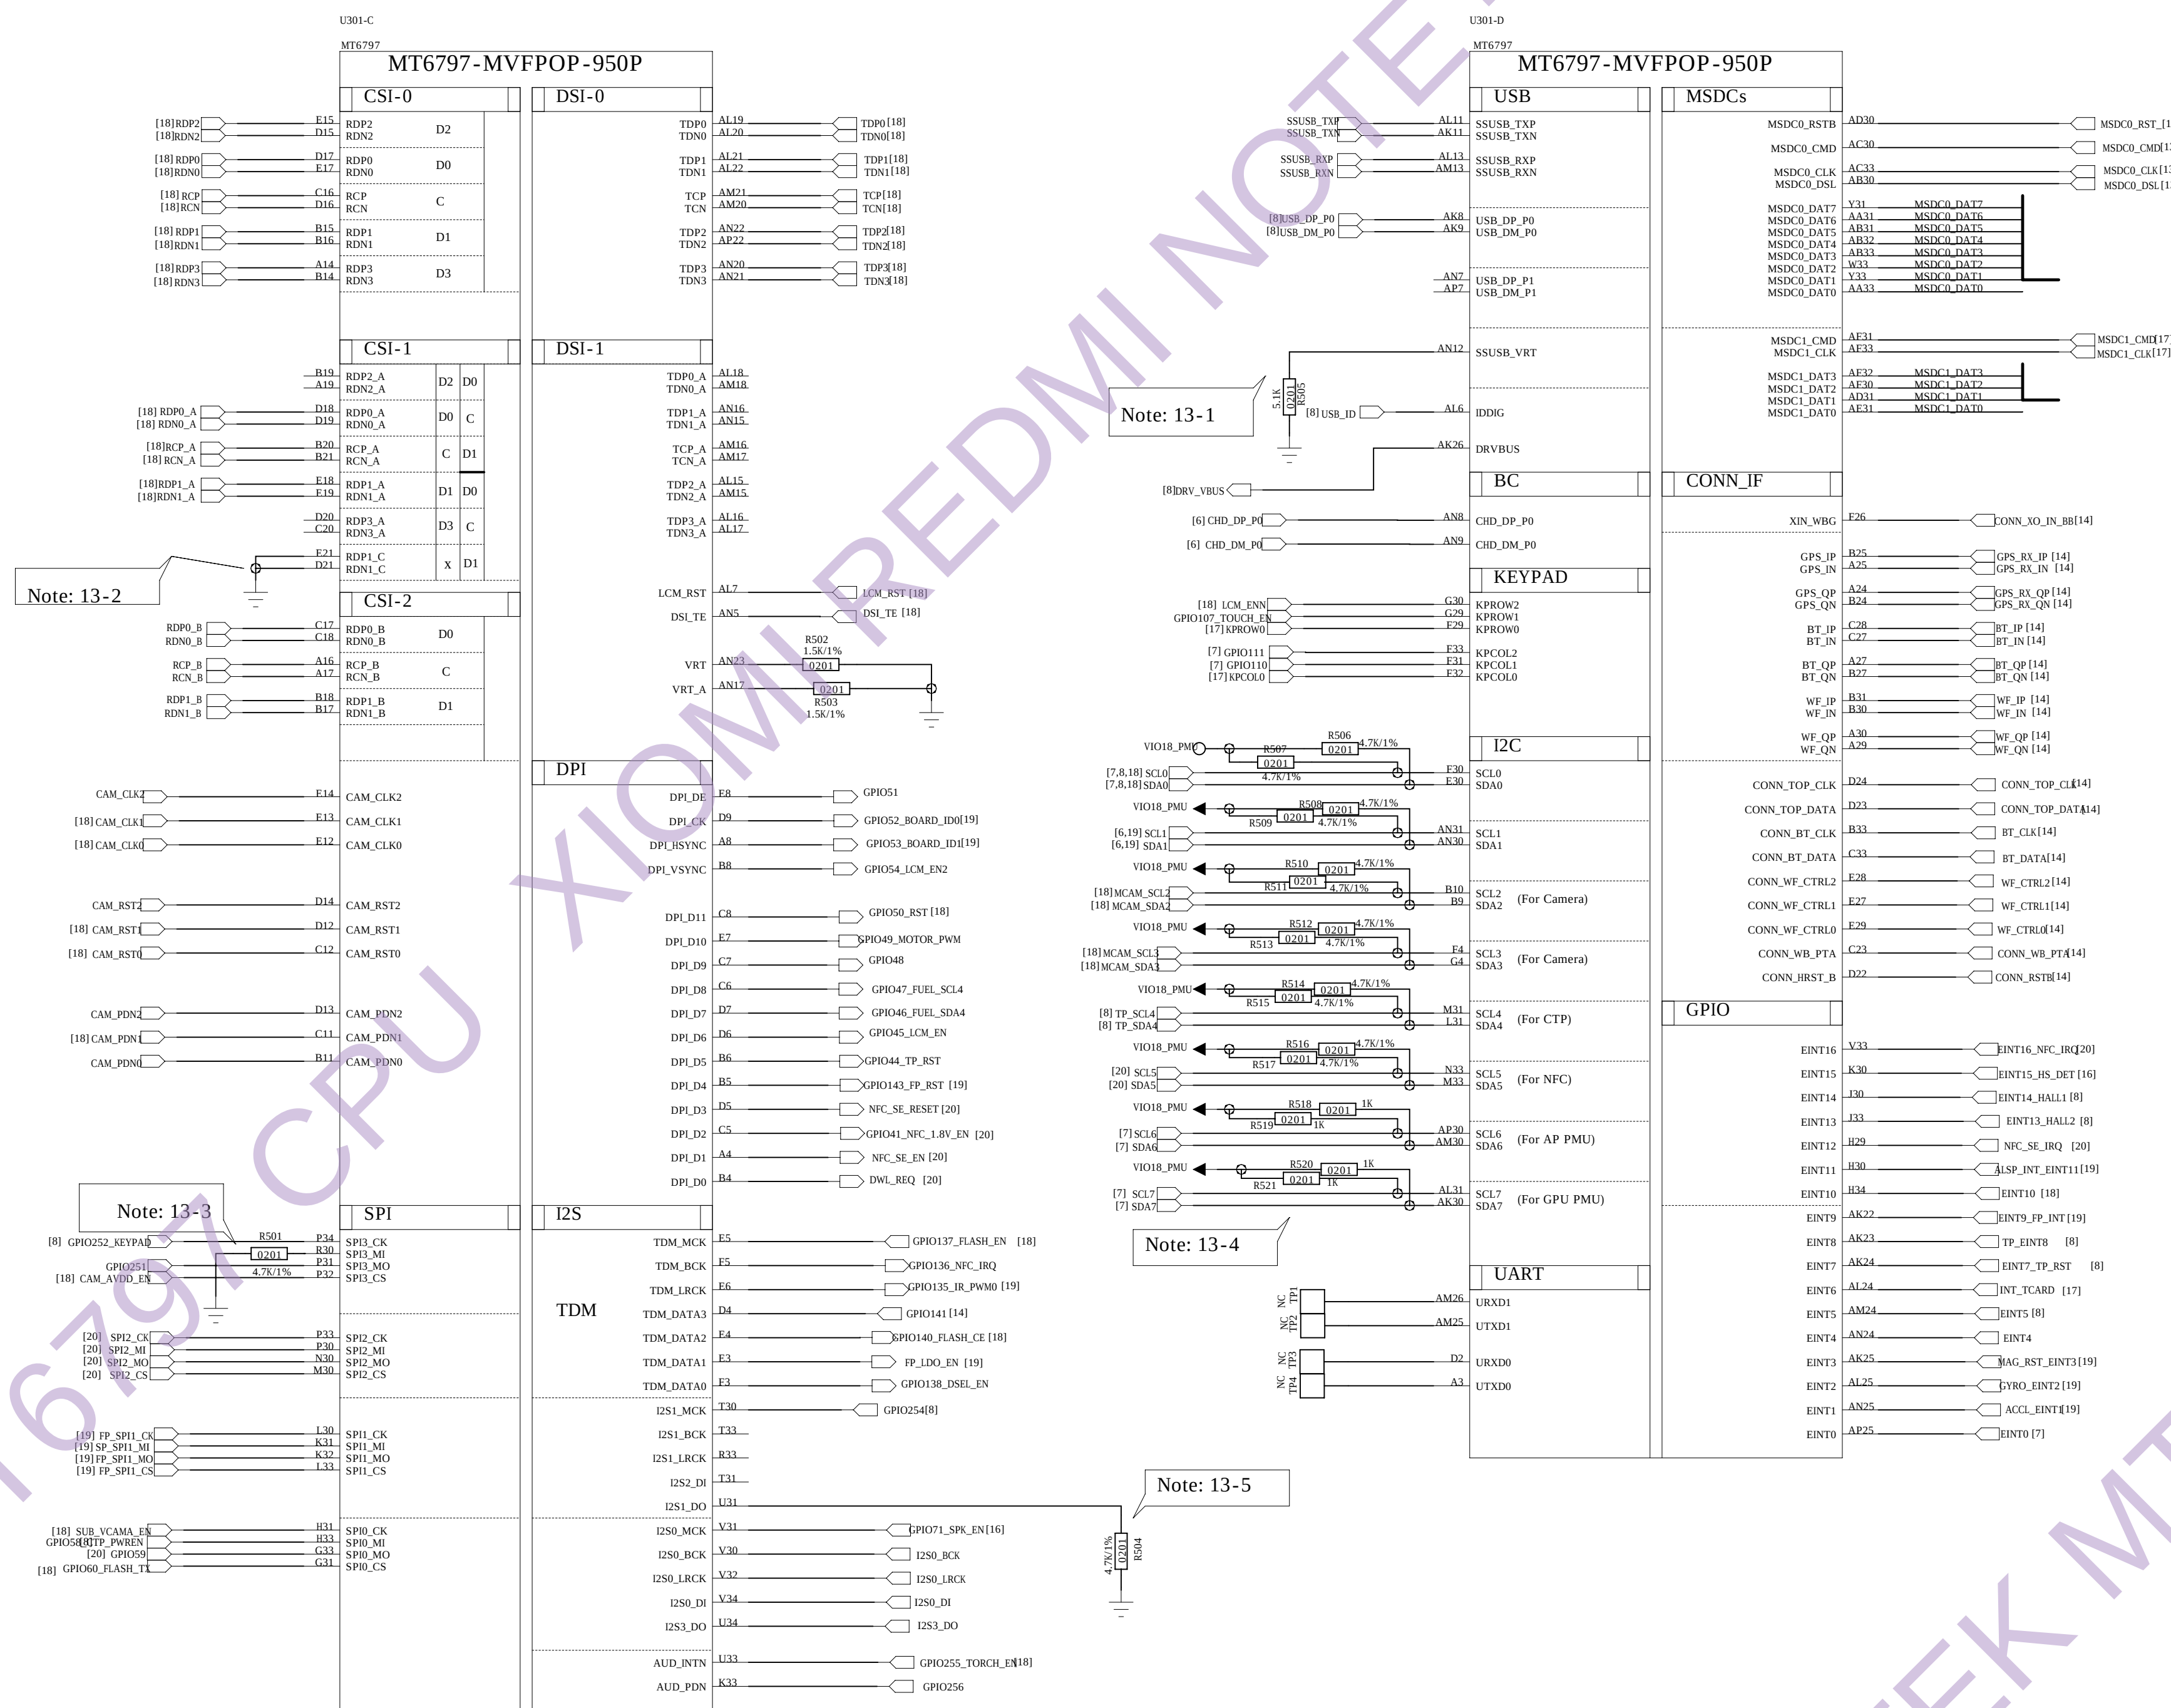

Schematic design notice of "12_BB_2" page.

Note 13-1: Default resistor of "SSUSB_VRT" can be NC if internal USB VRT is applied.

Note 13-2: Connect the the NC pins of CSI to GND

Note 13-3: The GPIO250 can't have external pull-up. 'C2K DROP_ZONE' output indicator is not allow to have external pull-up.

Note 13-4: The I/O type of I2C6/7 is push-pull; External pull-up is required if I2C6/7 slave devices can only support open-drain.

Note 13-5: The GPIO249 features I/O trap in system bootup that must be pulled down.

COMPANY: LC

TITLE: CX880

DESIGN: <Drawn By>	DATE: <Drawn Date>	CODE:	SIZE:	DRAWING NO:	REV:
CHECKED: <Checked By>	DATE: <Checked Date>	CODE:	SIZE:	DRAWING NO:	REV:
QUALITY CONTROL: <QC By>	DATE: <QC Date>	CODE:	SIZE:	DRAWING NO:	REV:
RELEASED: <Released By>	DATE: <Release Date>	CODE:	SIZE:	DRAWING NO:	REV:

<Code> A0 <Drawing Number>Revision>

SCALE: <Scale> SHEET: 56 20

REVISION RECORD			
LTB	ECO NO	APPROVED	DATE

6


5

4

3

2



1

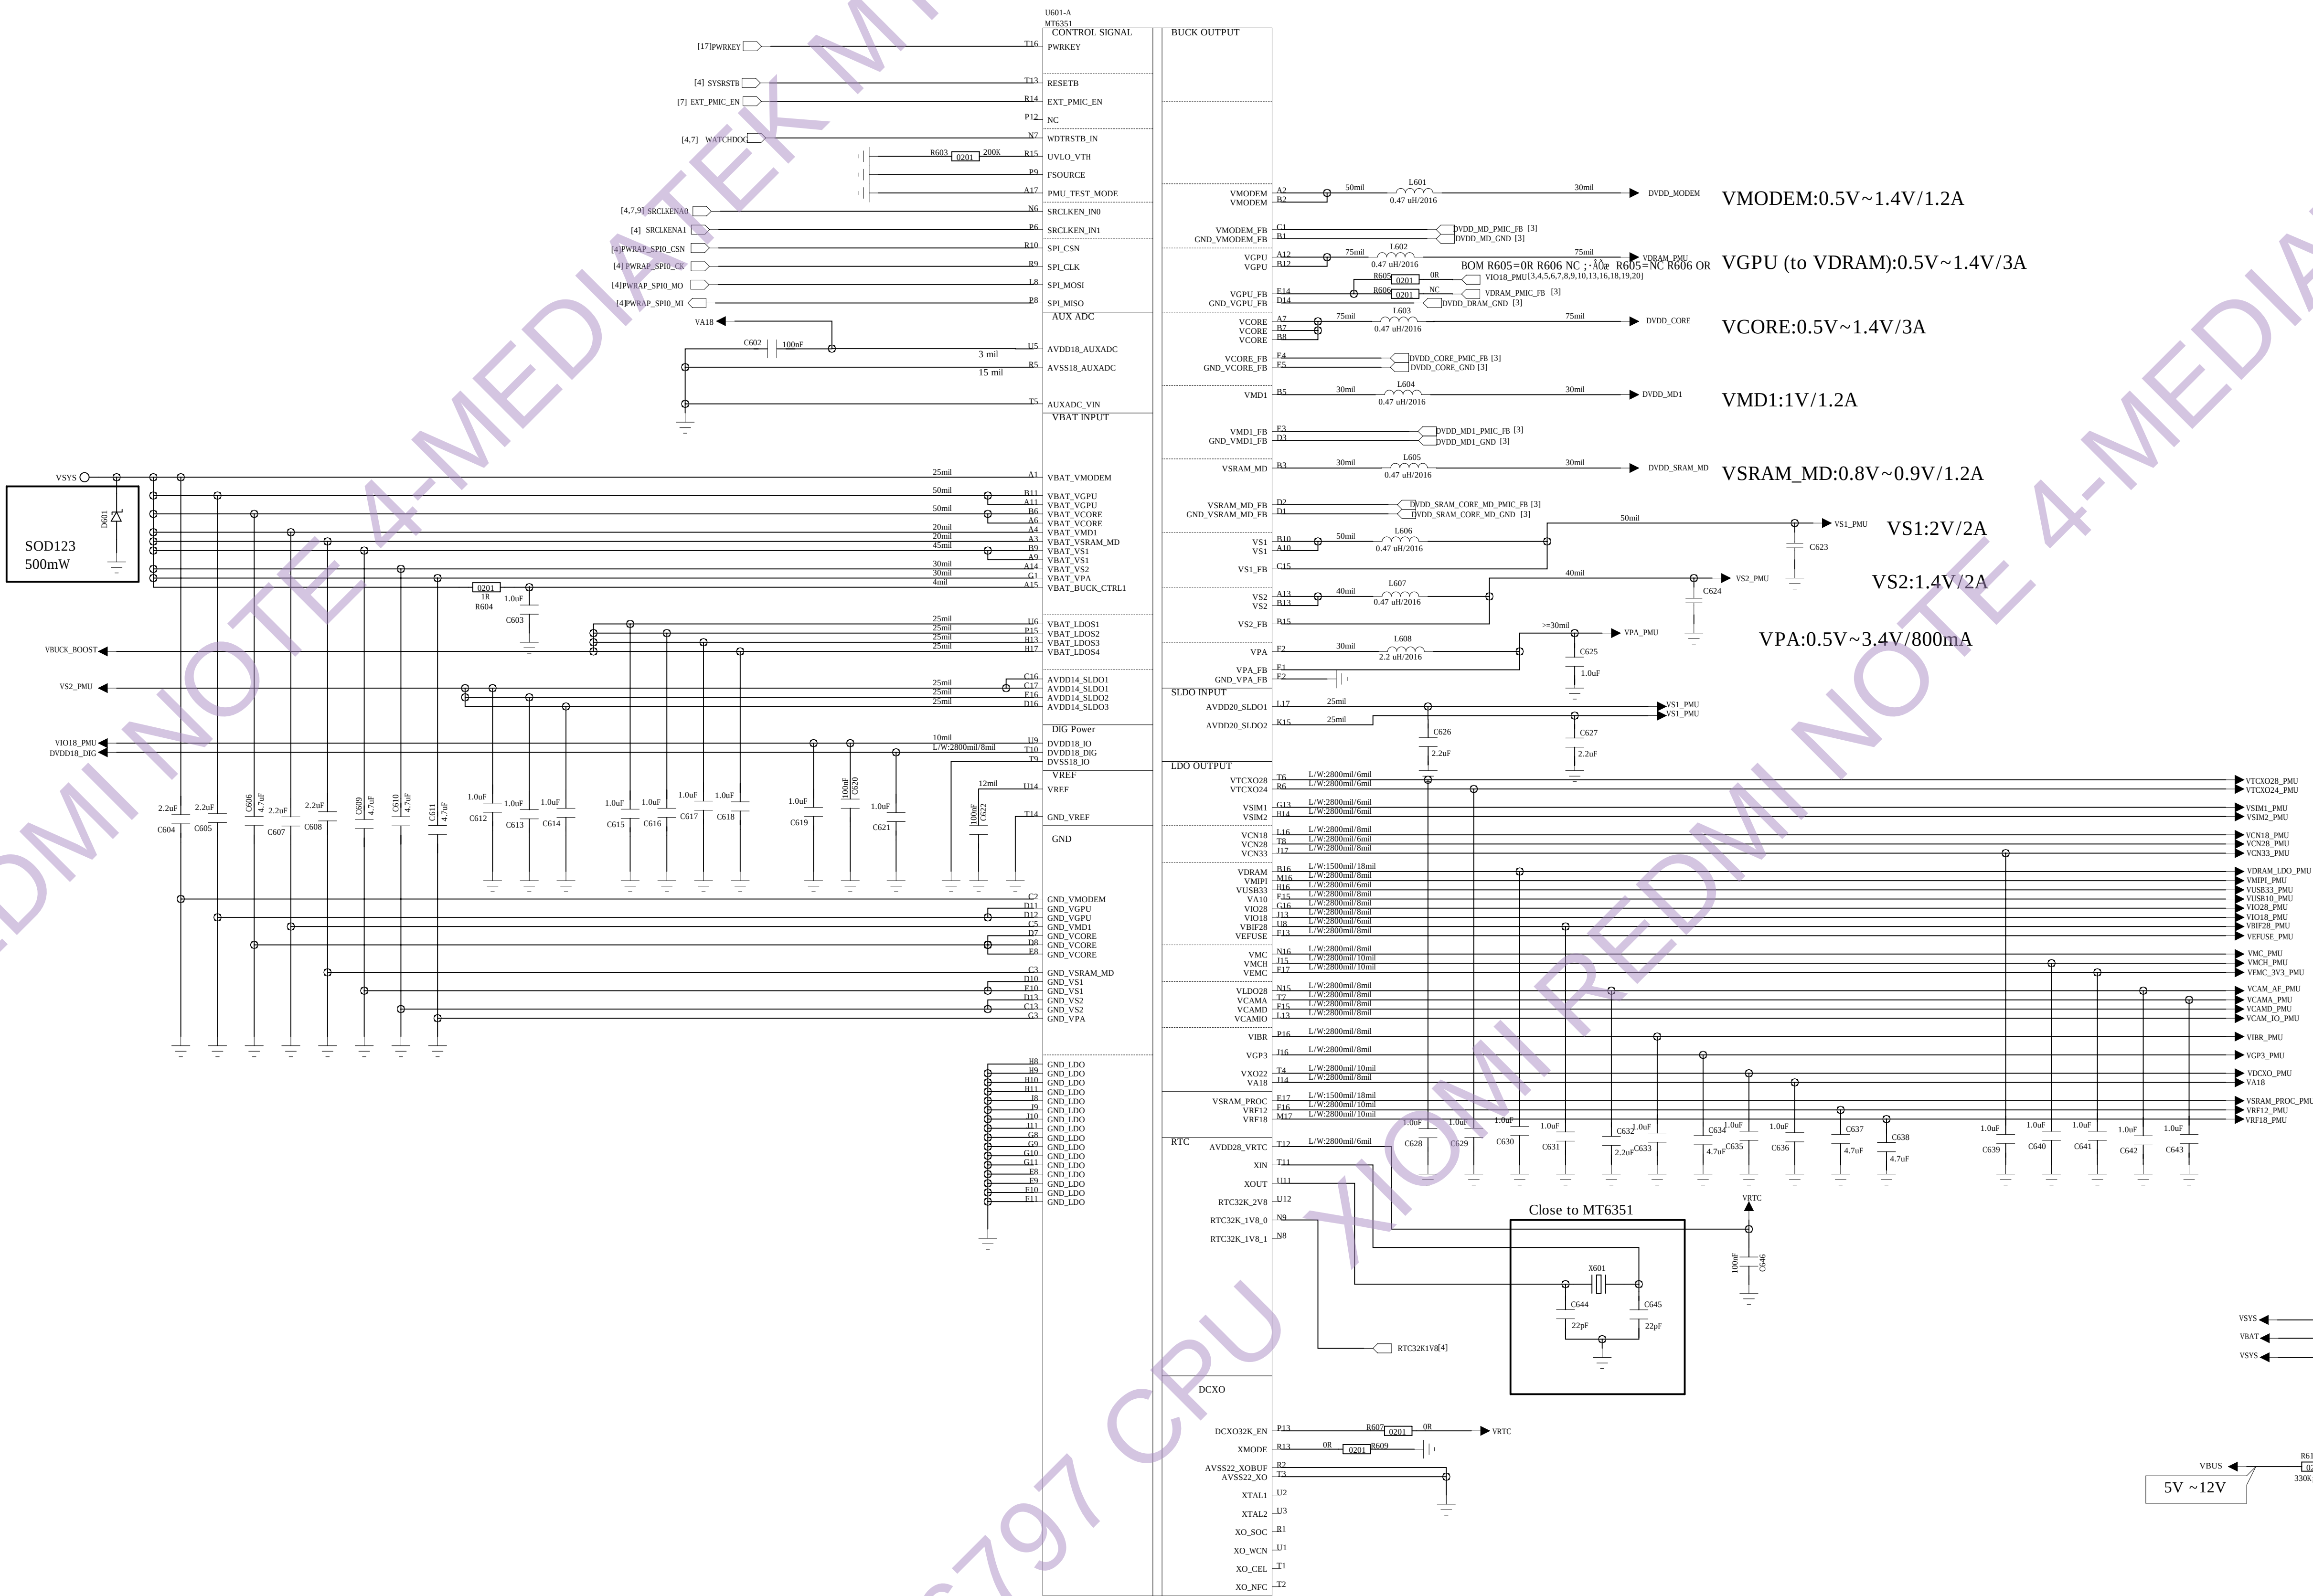

Schematic design notice of '21_POWER_MT6351_2' page.

Note 21-1:

Reserve 1.5K in order to give additional power to turn on charger LED driver while low battery.

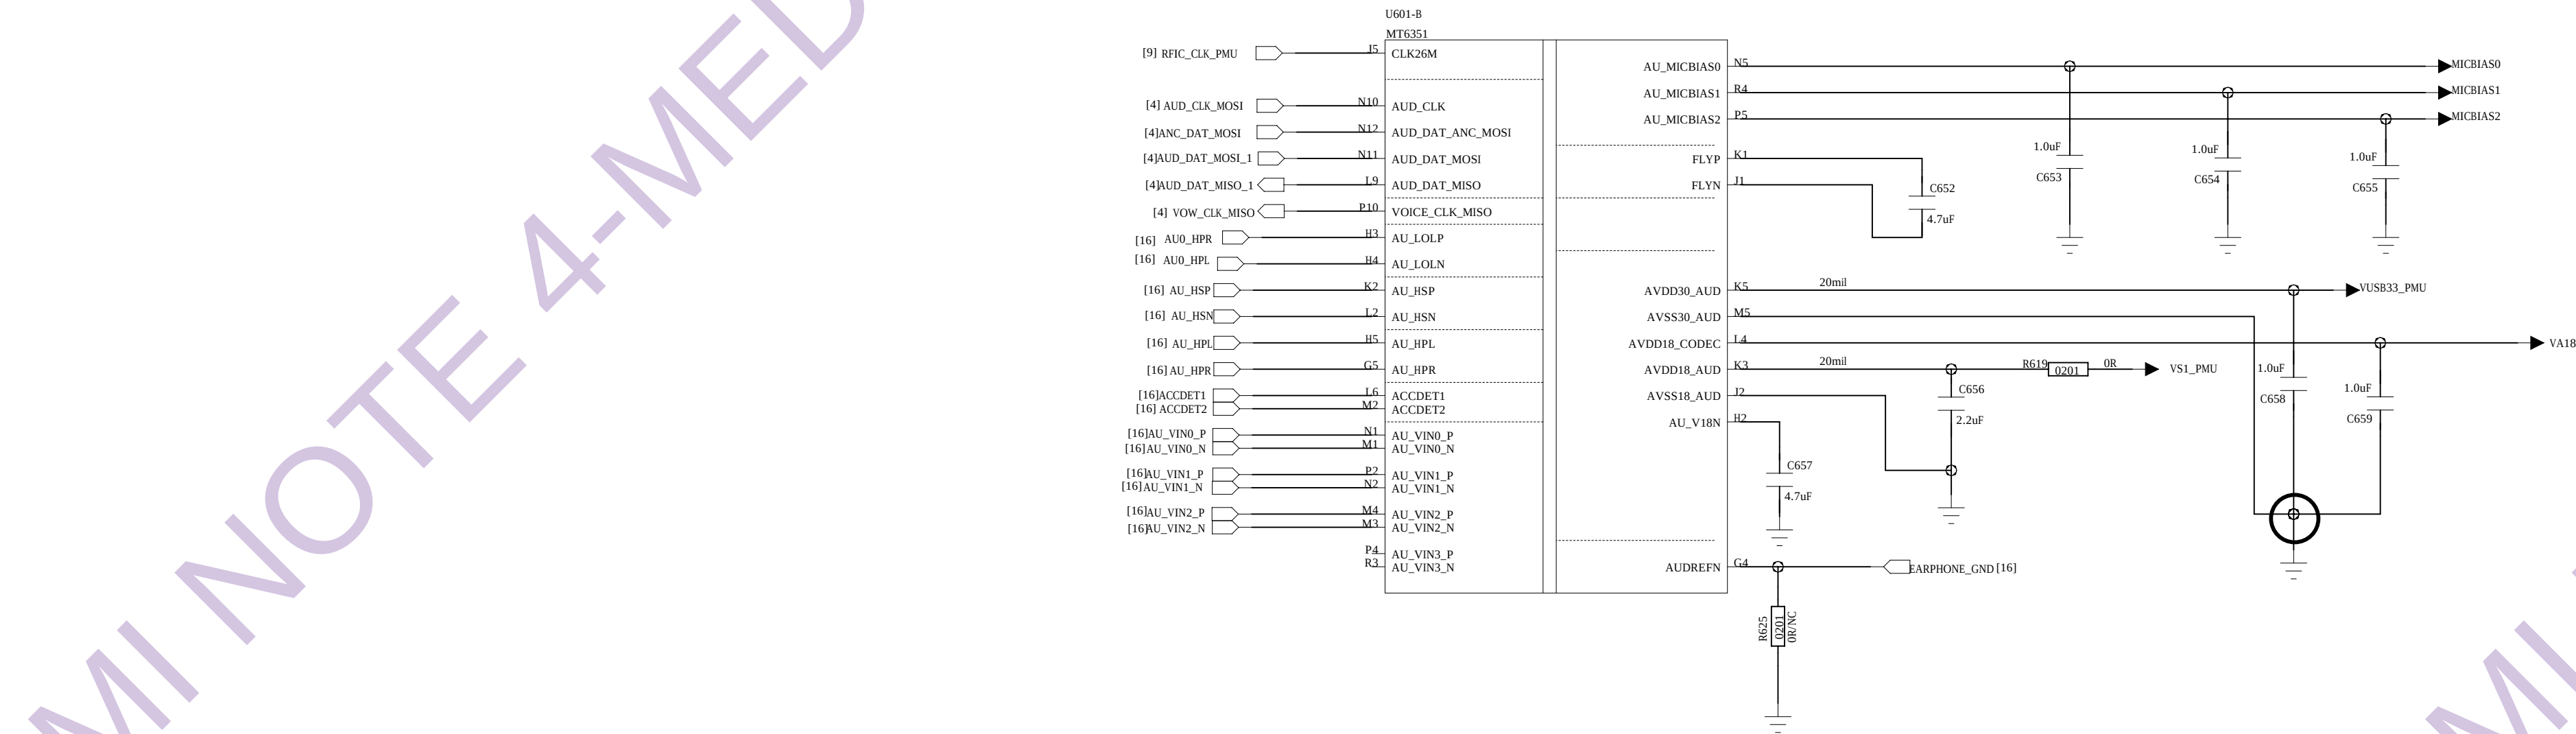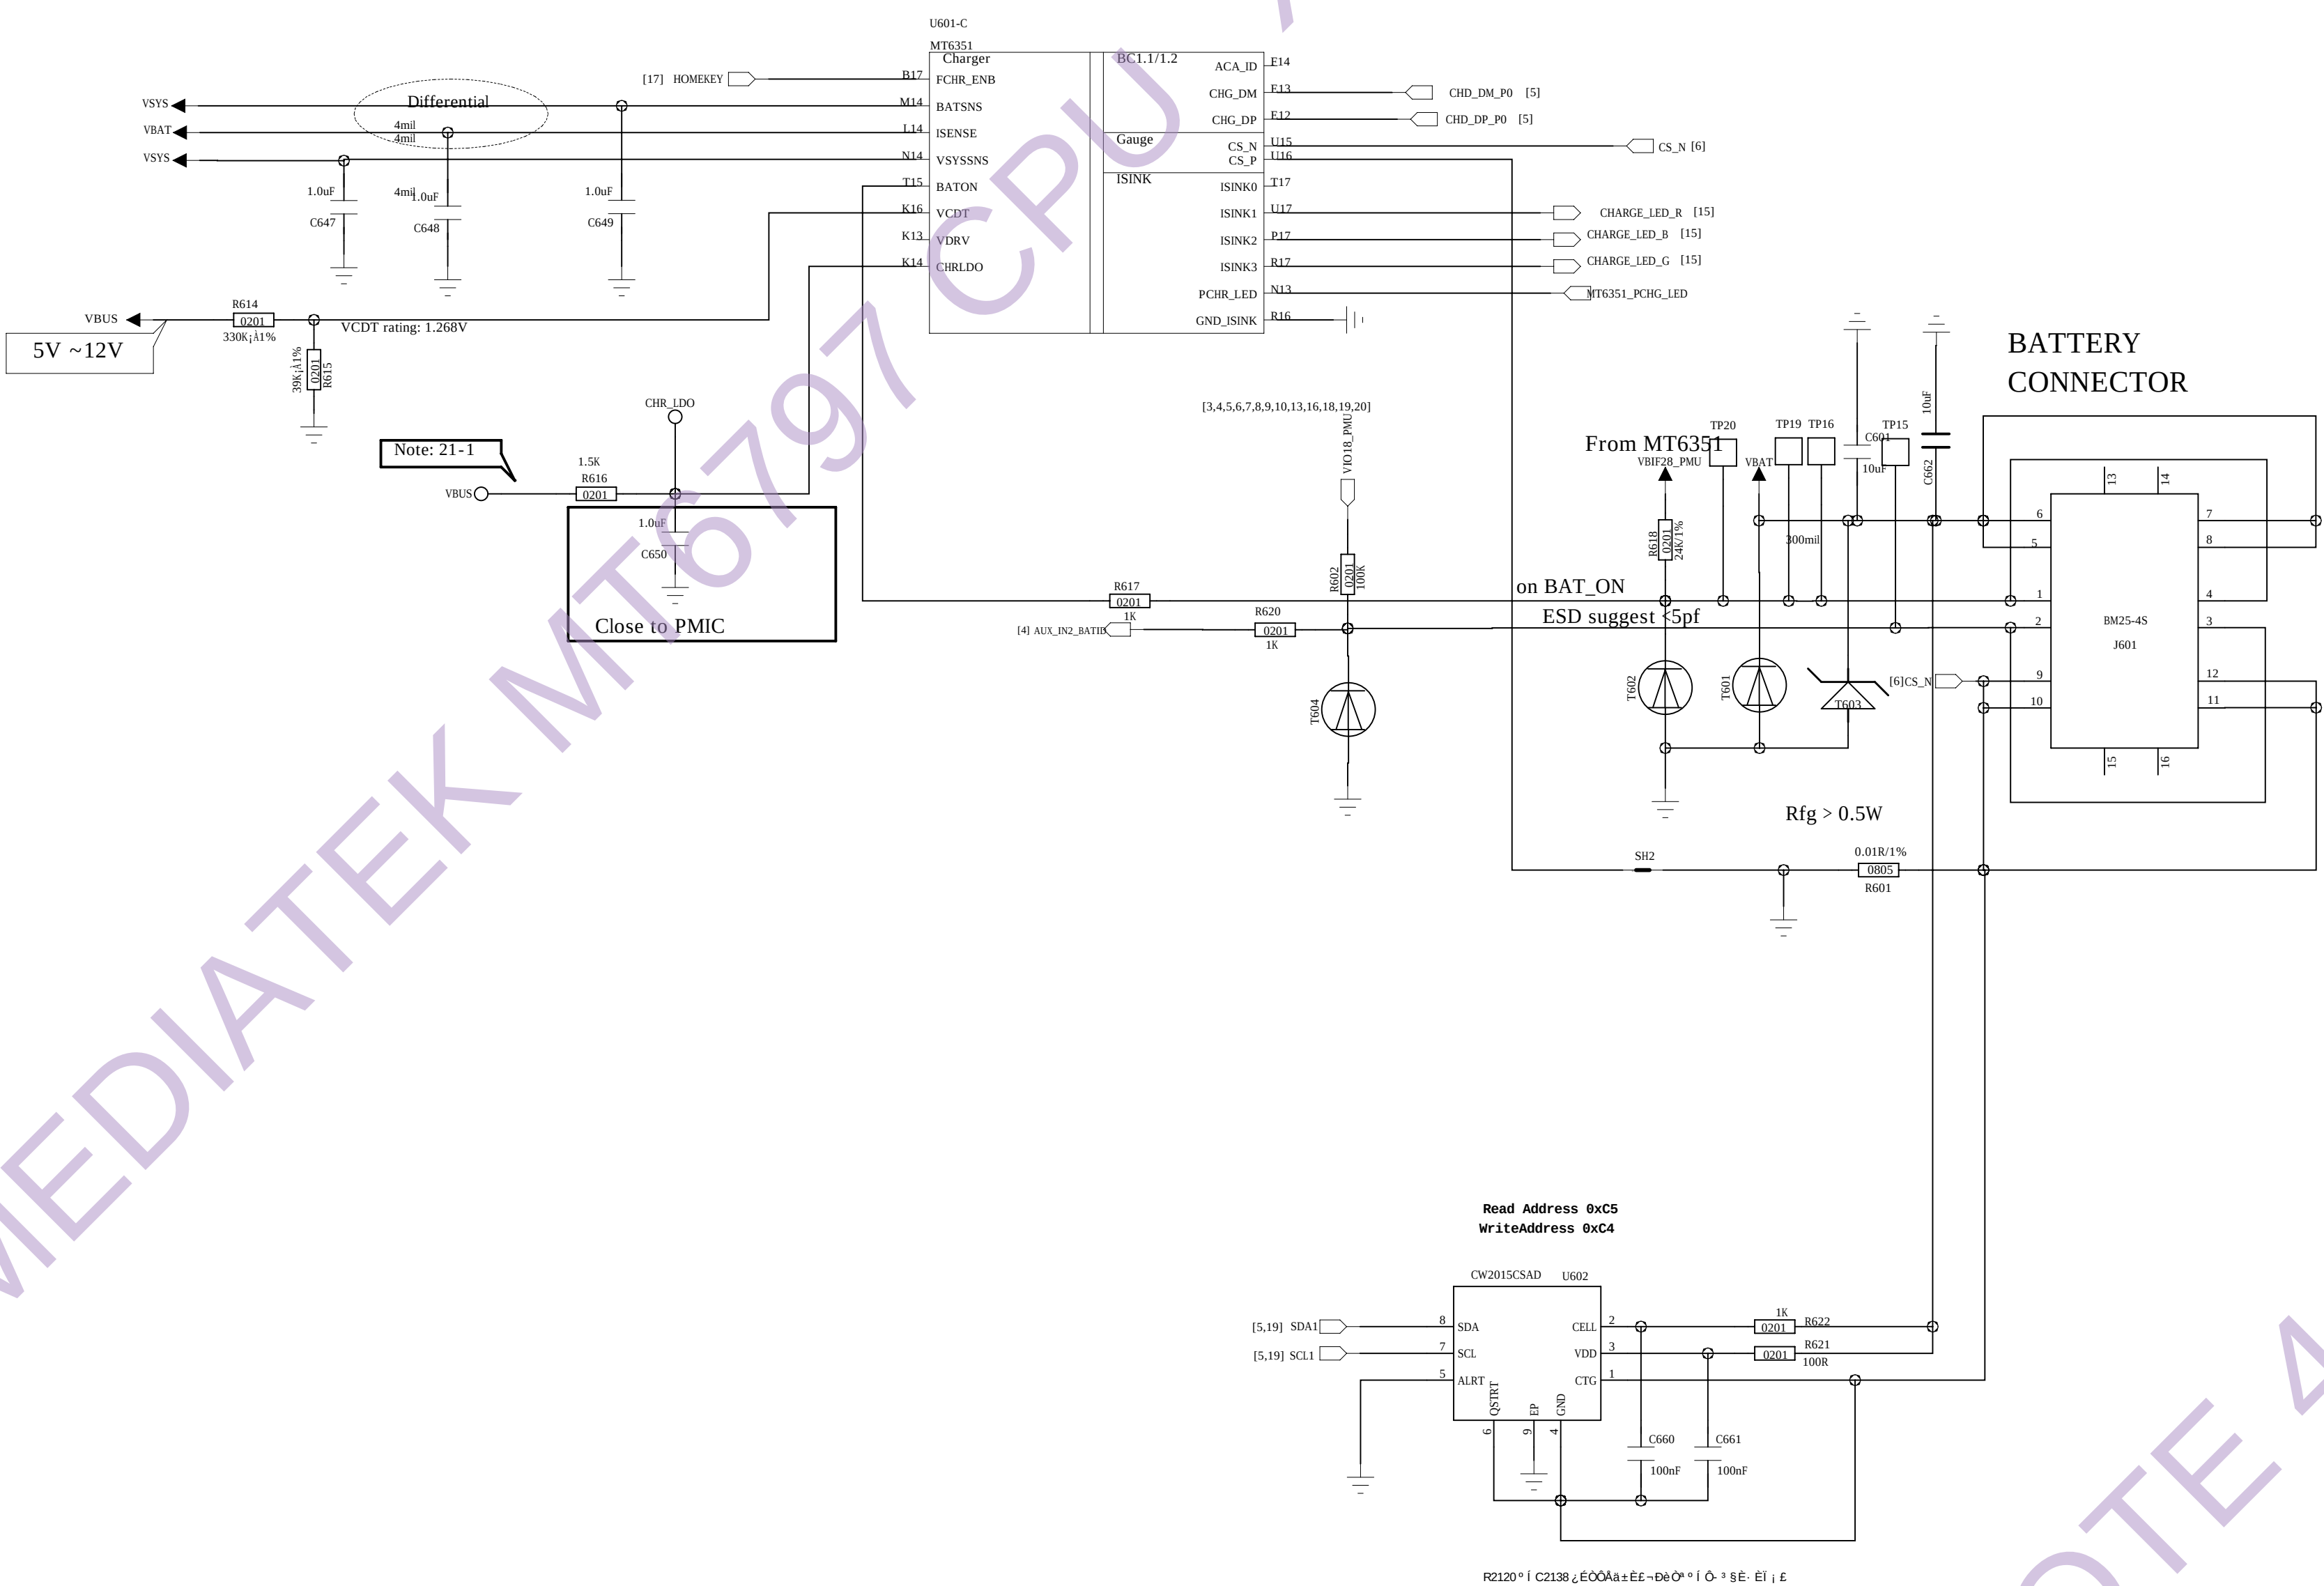

LC			
CX880			
DRAWN	DATE	CODE	NO.
<Drawn By>	<Drawn Date>		
CHECKED	DATE	CODE	NO.
<Checked By>	<Checked Date>		
QUALITY CONTROL	DATE	CODE	NO.
<QC By>	<QC Date>		
RELEASED	DATE	CODE	NO.
<Released By>	<Release Date>		

LC


CX880

DRAWING NO. REV.

<Drawing Number>Revision>

SCALE: <Scale> SHEET 6/ 20


REVISION RECORD			
LTB	ECO NO.	APPROVED	DATE

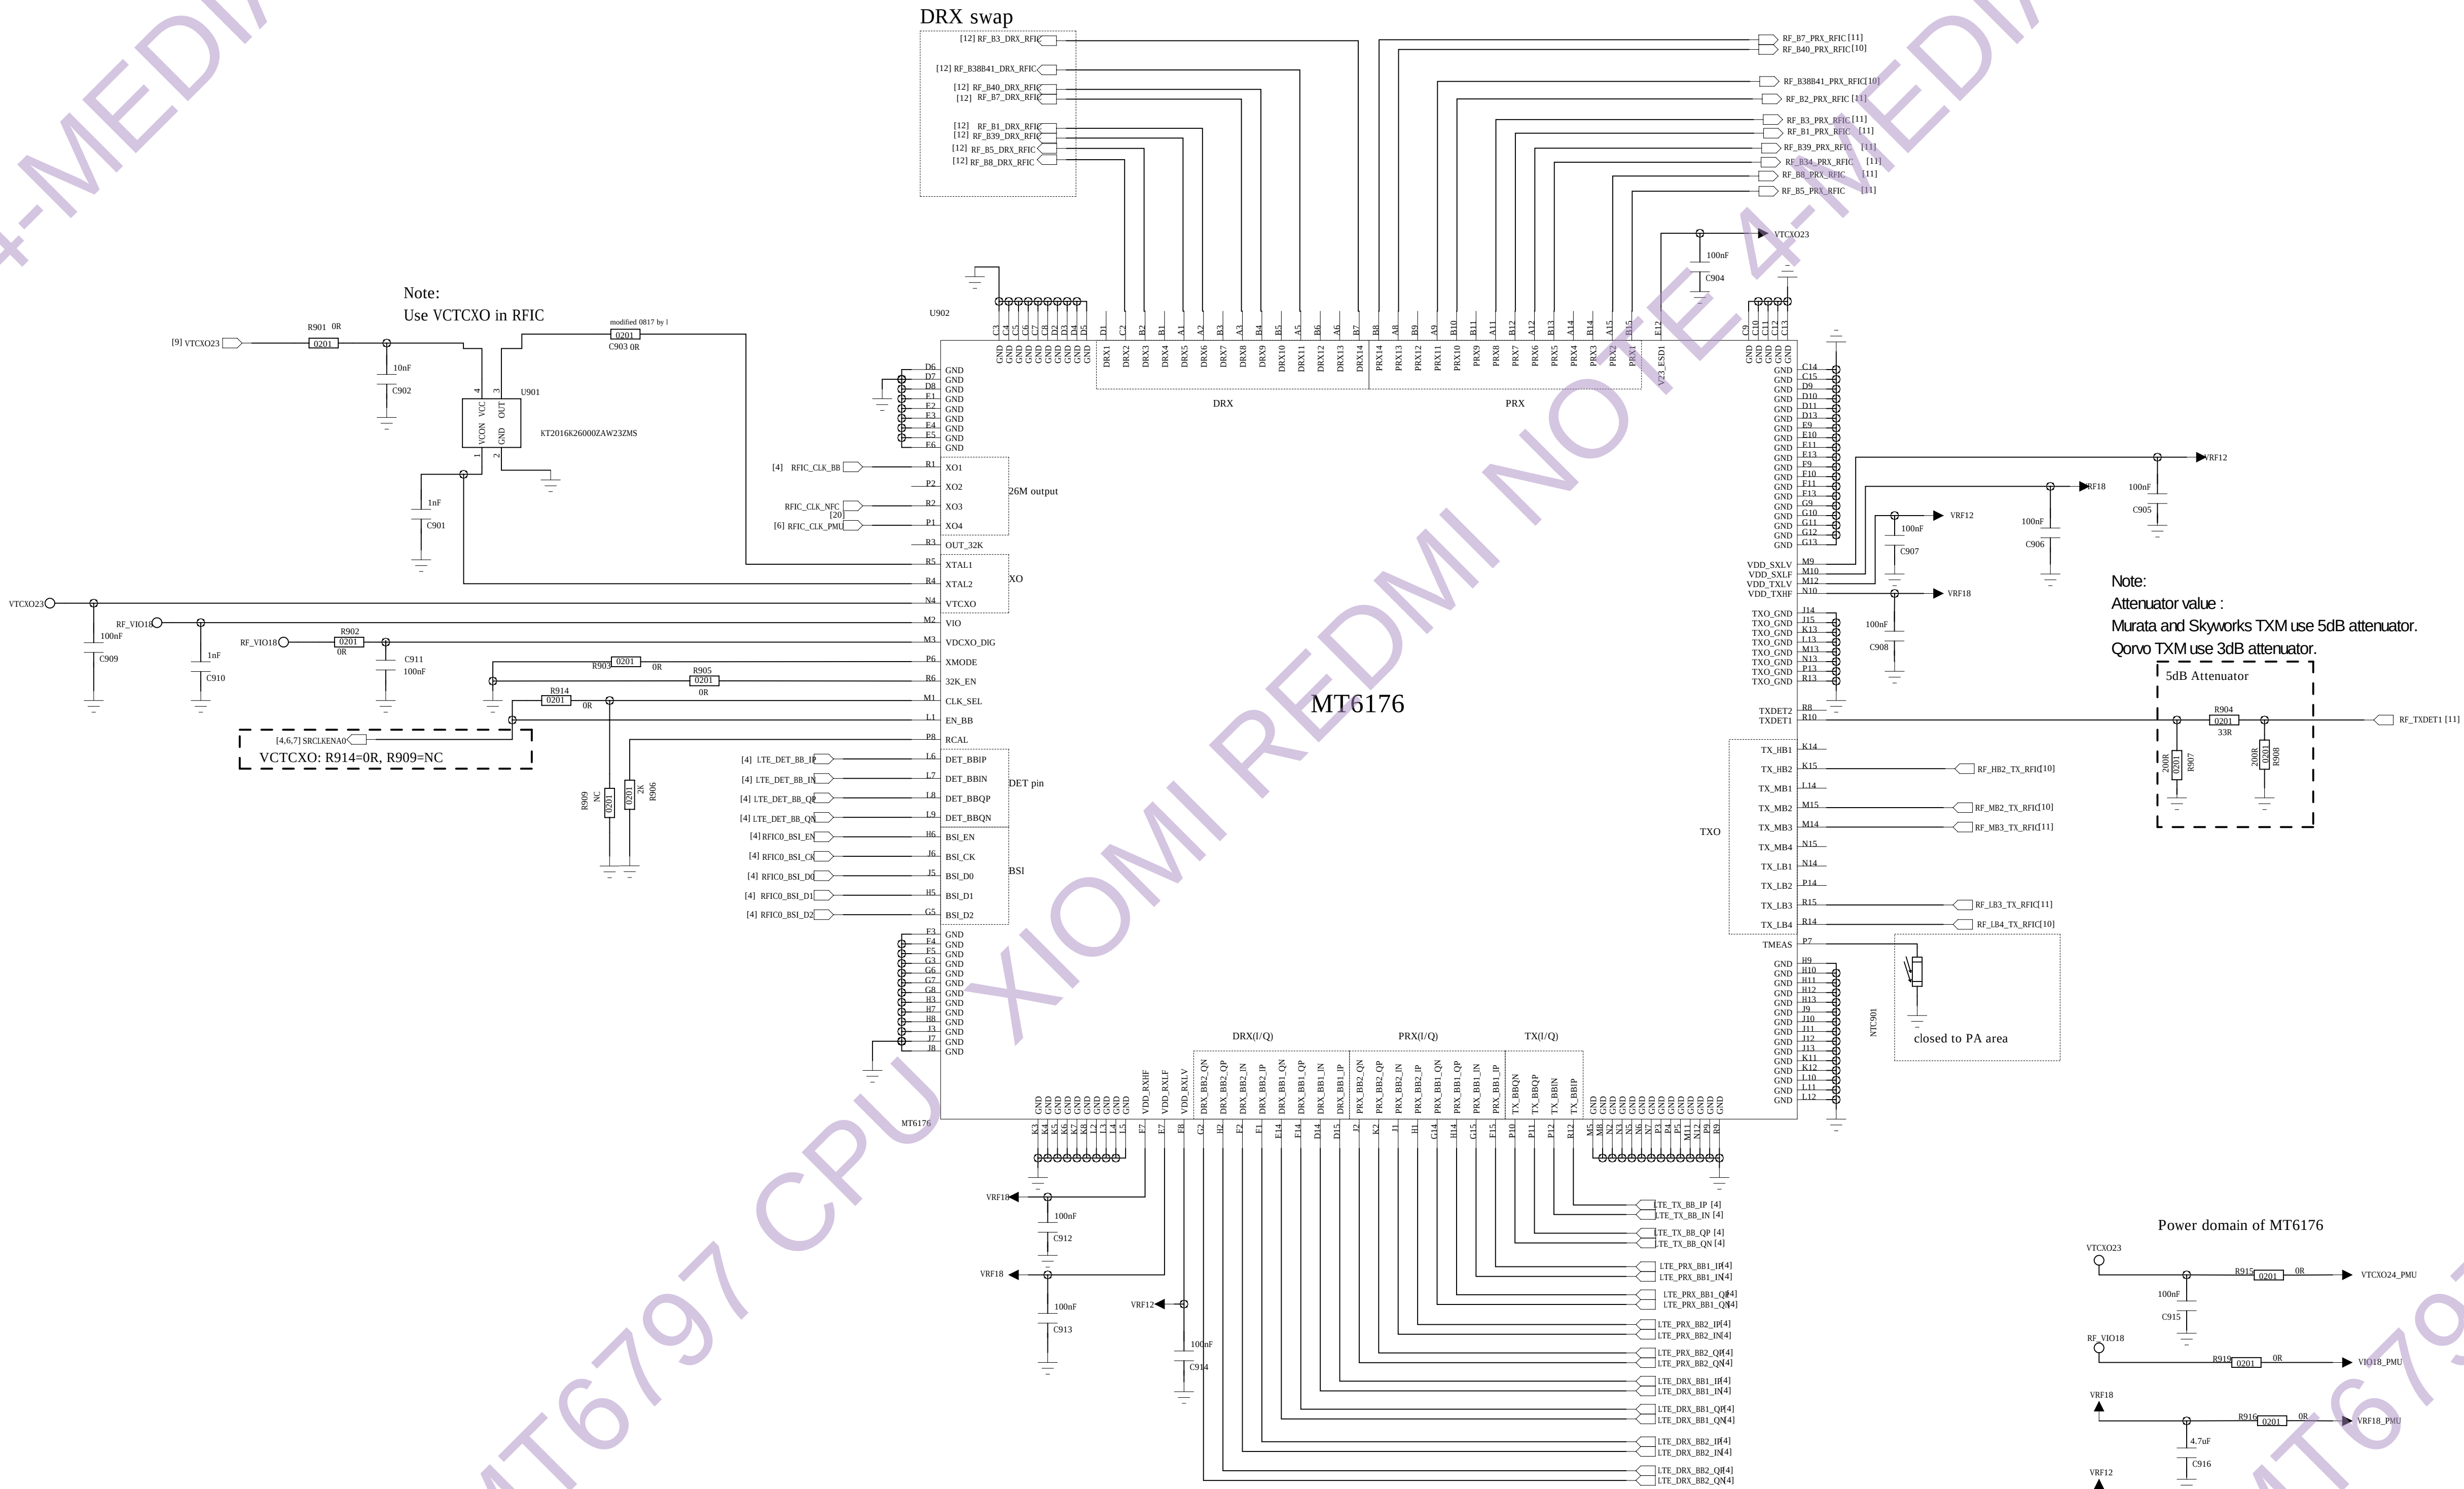


CORPORATION LC

MODEL CX880

DRAWN	<Drawn By>	DATE	<Drawn Date>	CODE	SIZE	DRAWING NO.	REV.
CHECKED	<Checked By>	DATE	<Checked Date>				
QUALITY CONTROL	<QC By>	DATE	<QC Date>	<Code>	A0	<Drawing Number>	<Revision>
RELEASED	<Released By>	DATE	<Release Date>	SCALE	<Scale>	SHEET	20

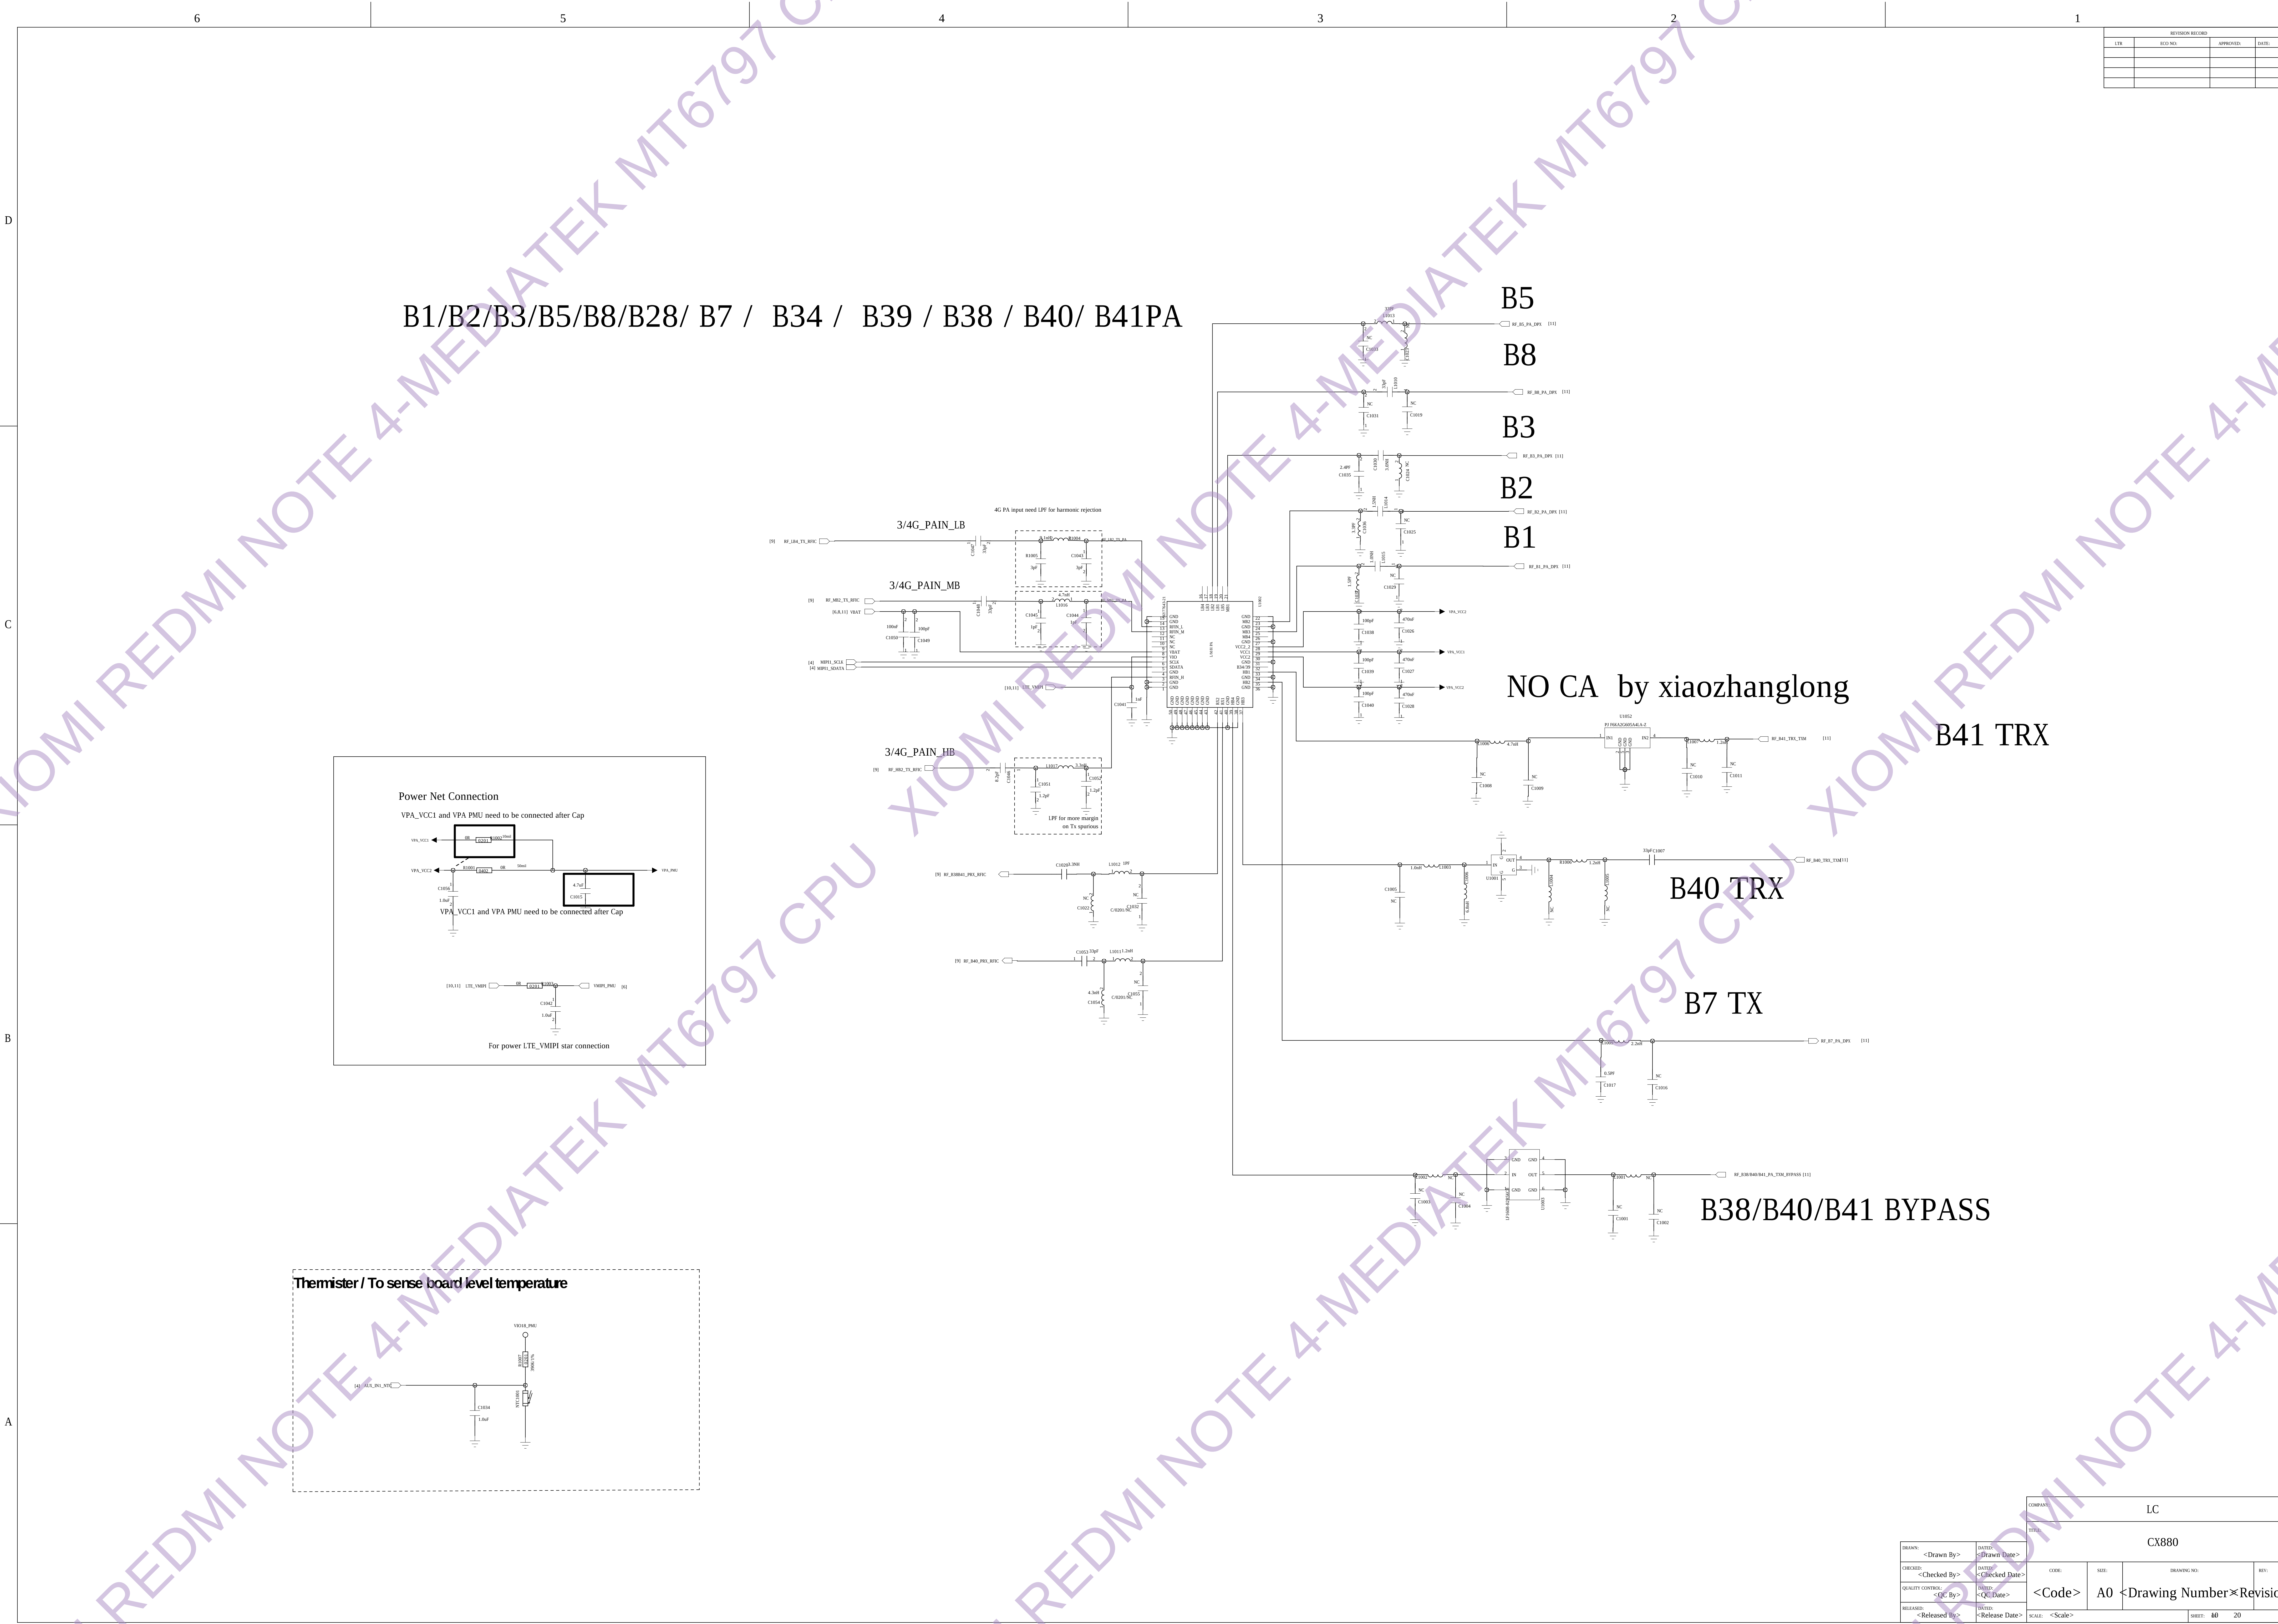


DPDT SWITCH

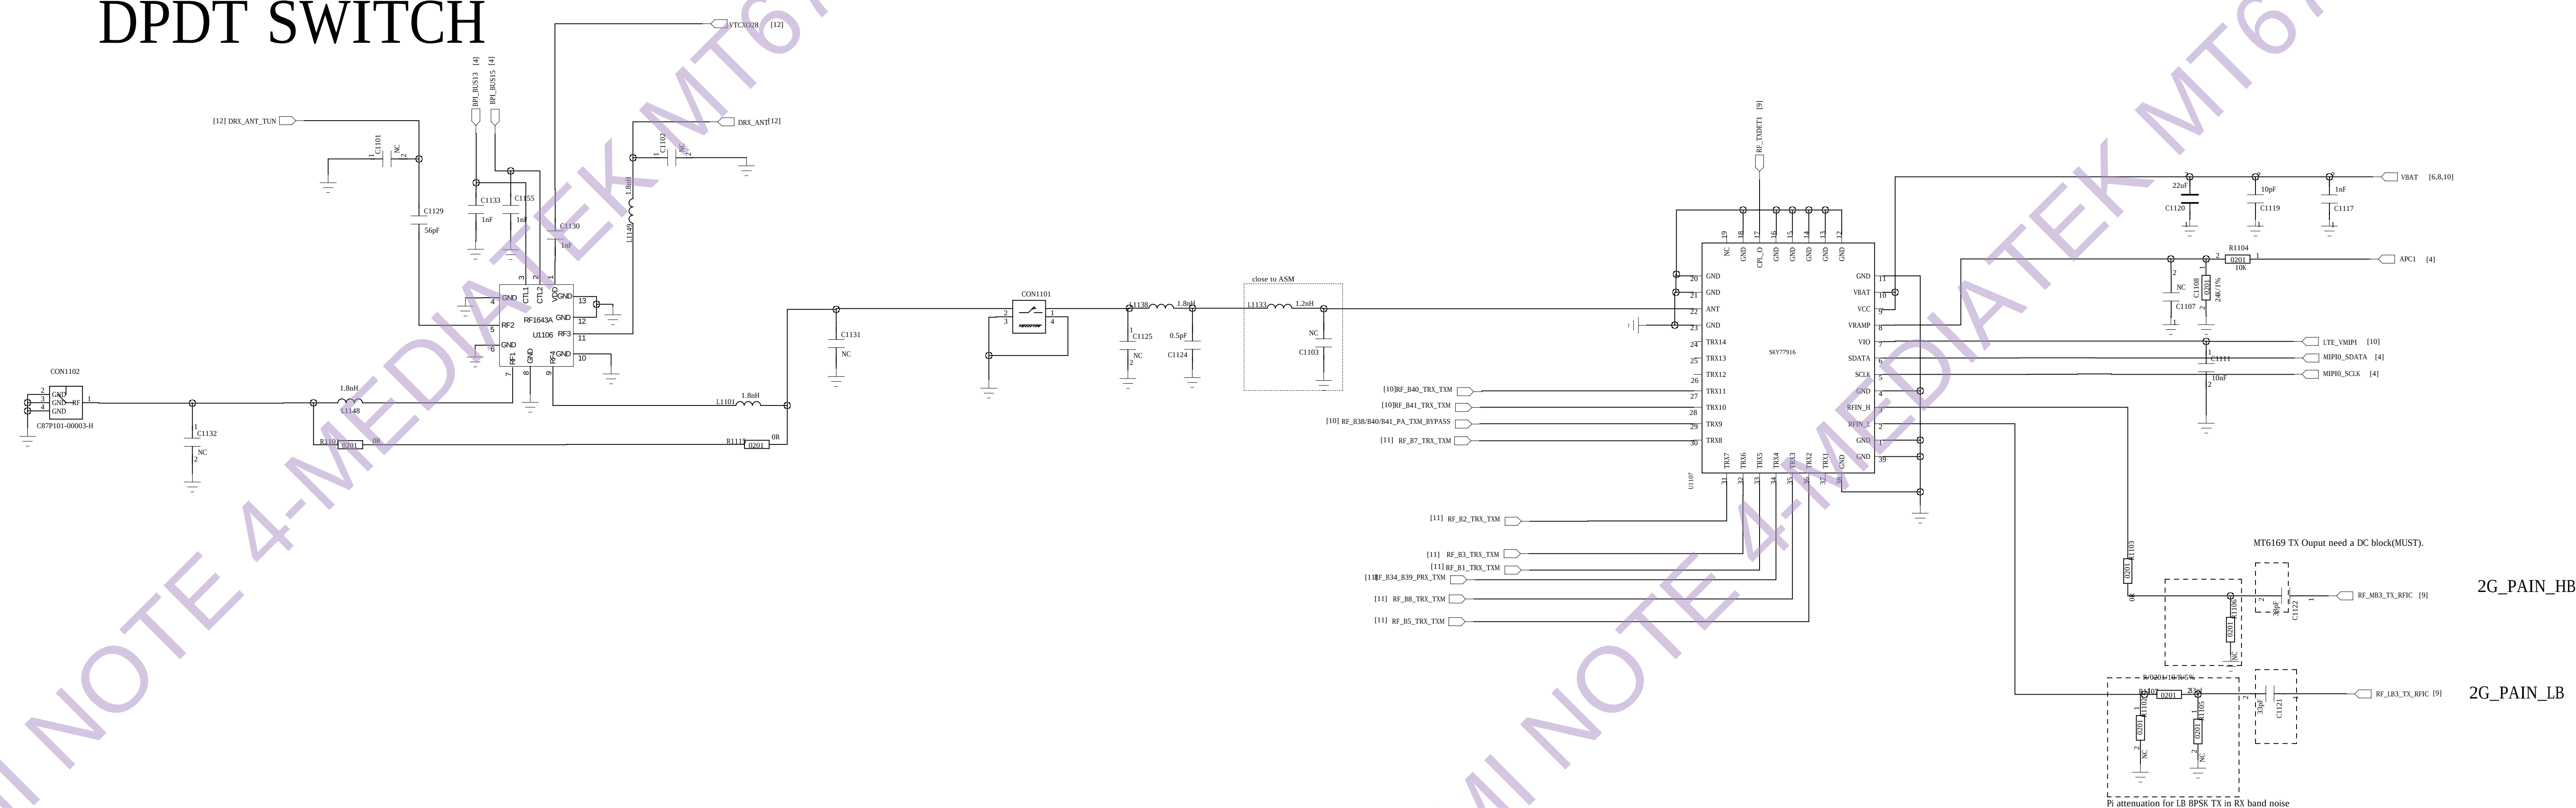

B1 TRX


no CA by xiaozhanglong

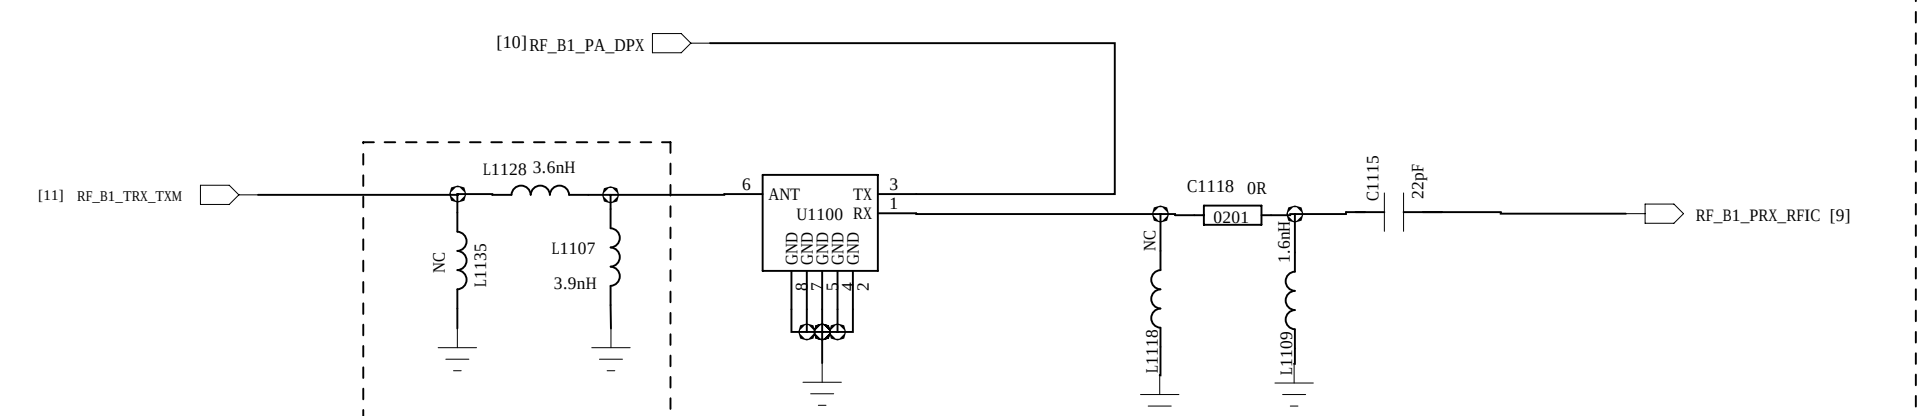

no CA new 20160413


B3 TRX

no CA by xiaozhanglong

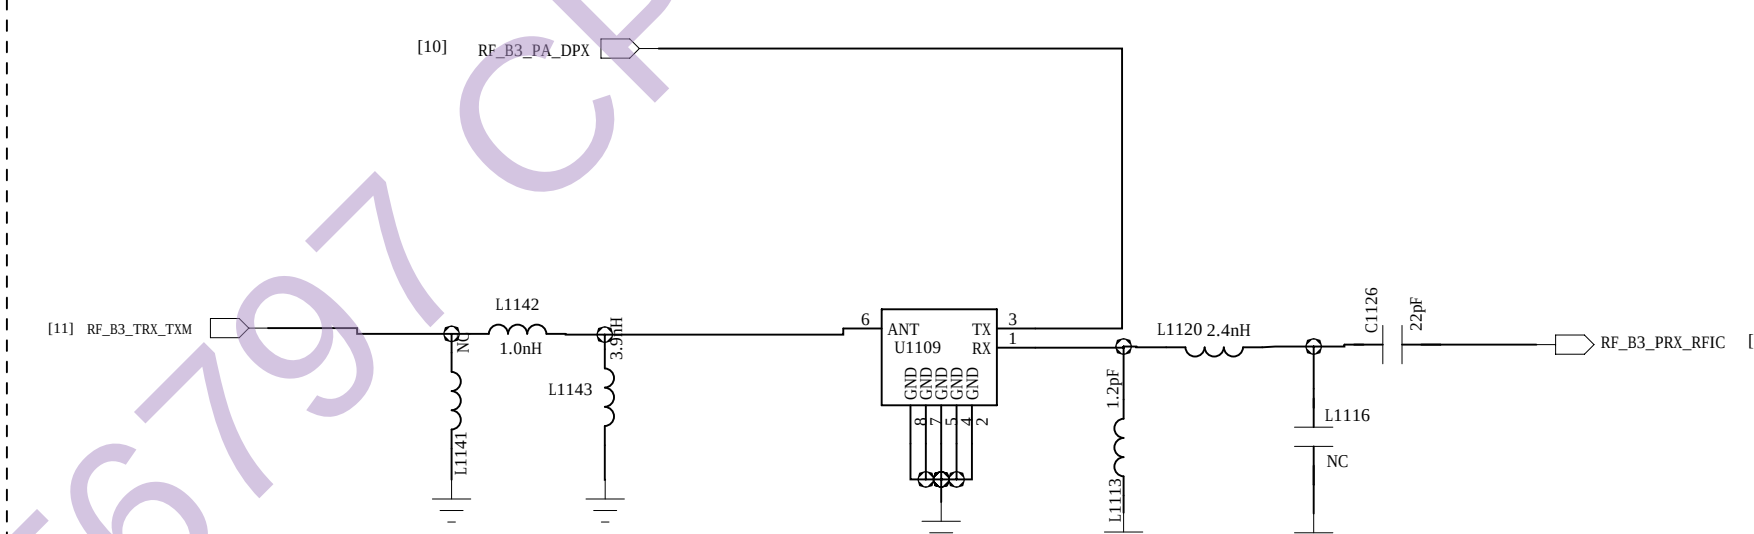
 1.8×1.4 

B7 TRX

Change to 6402 on 6/7

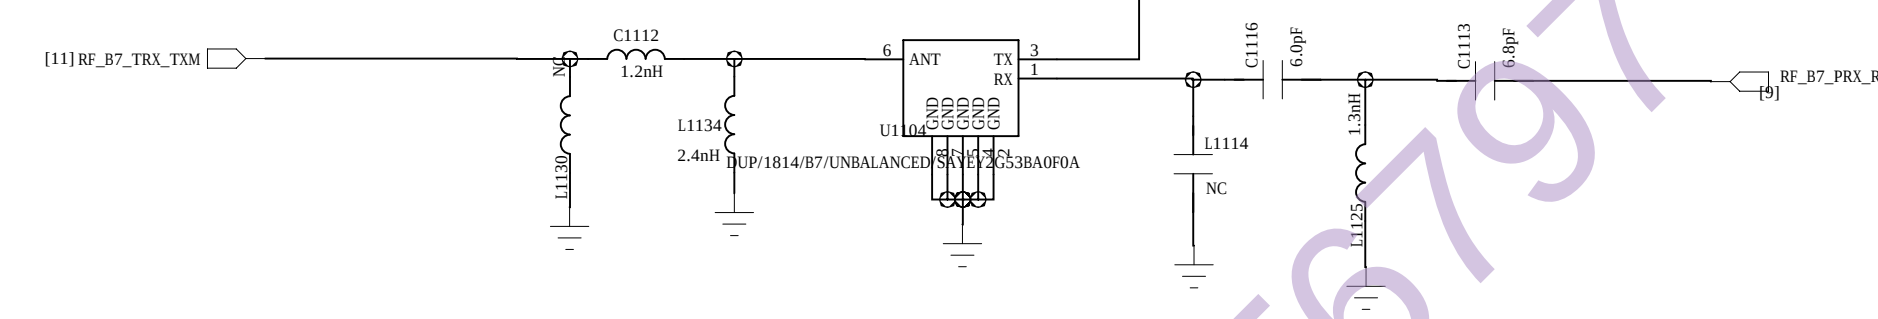


B2 TRX

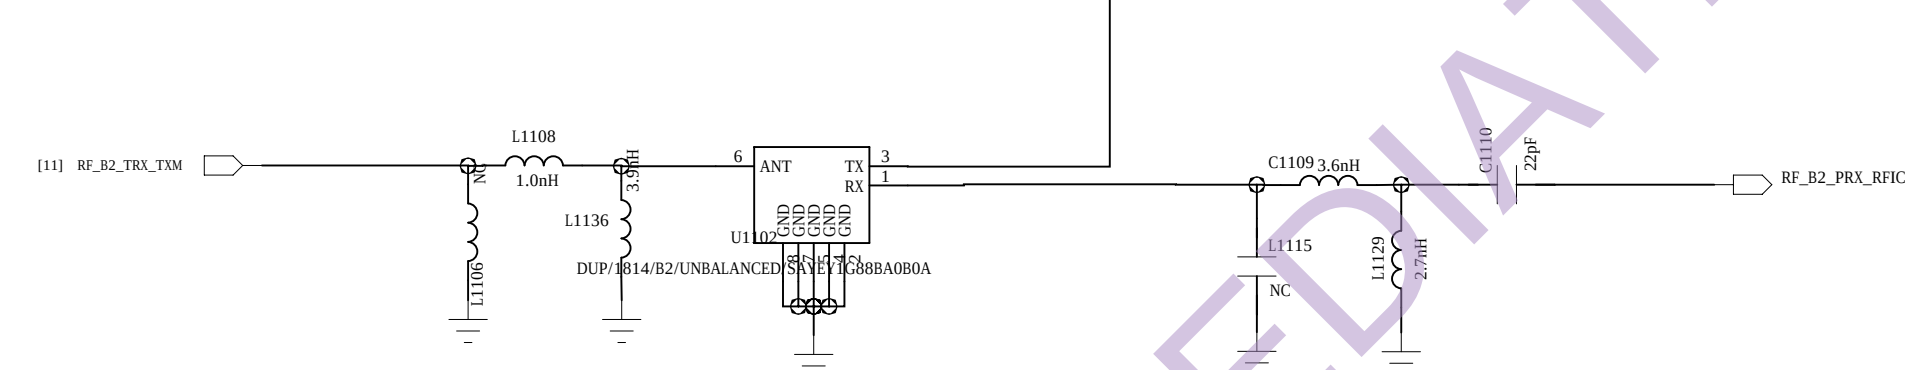 1.8×1.4 


B8 TRX

1.8*1.4

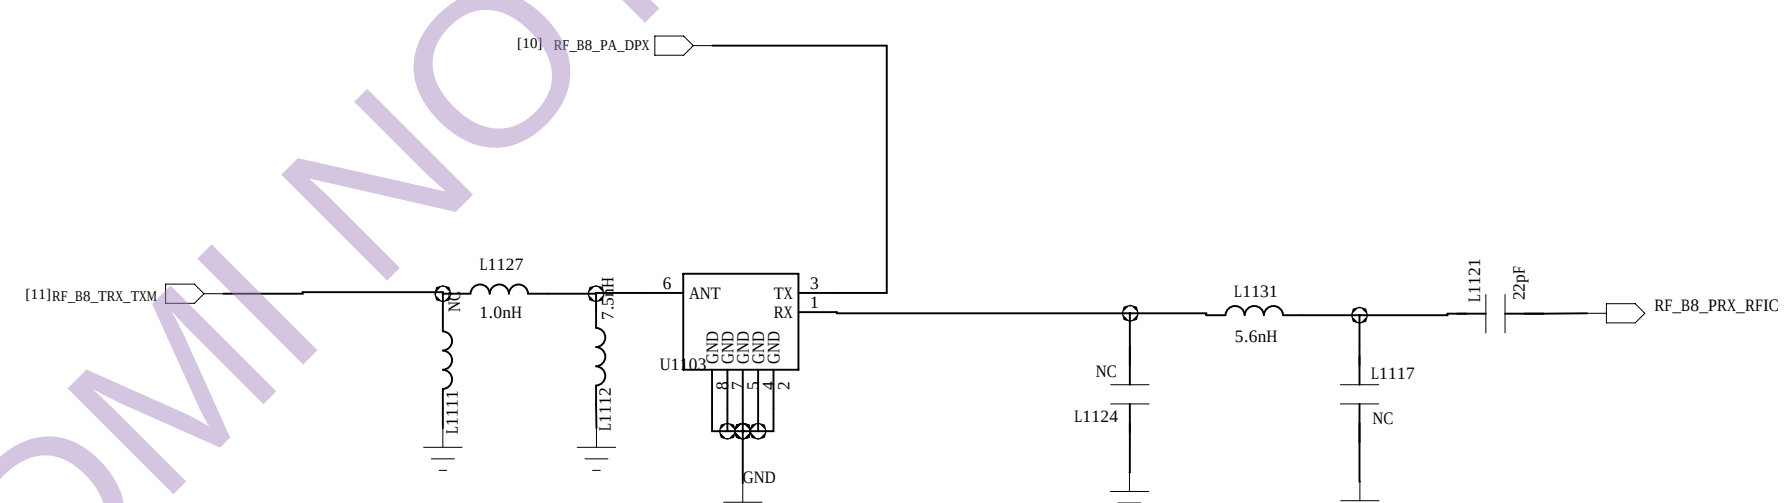


B5 TRX


1.8*1.4

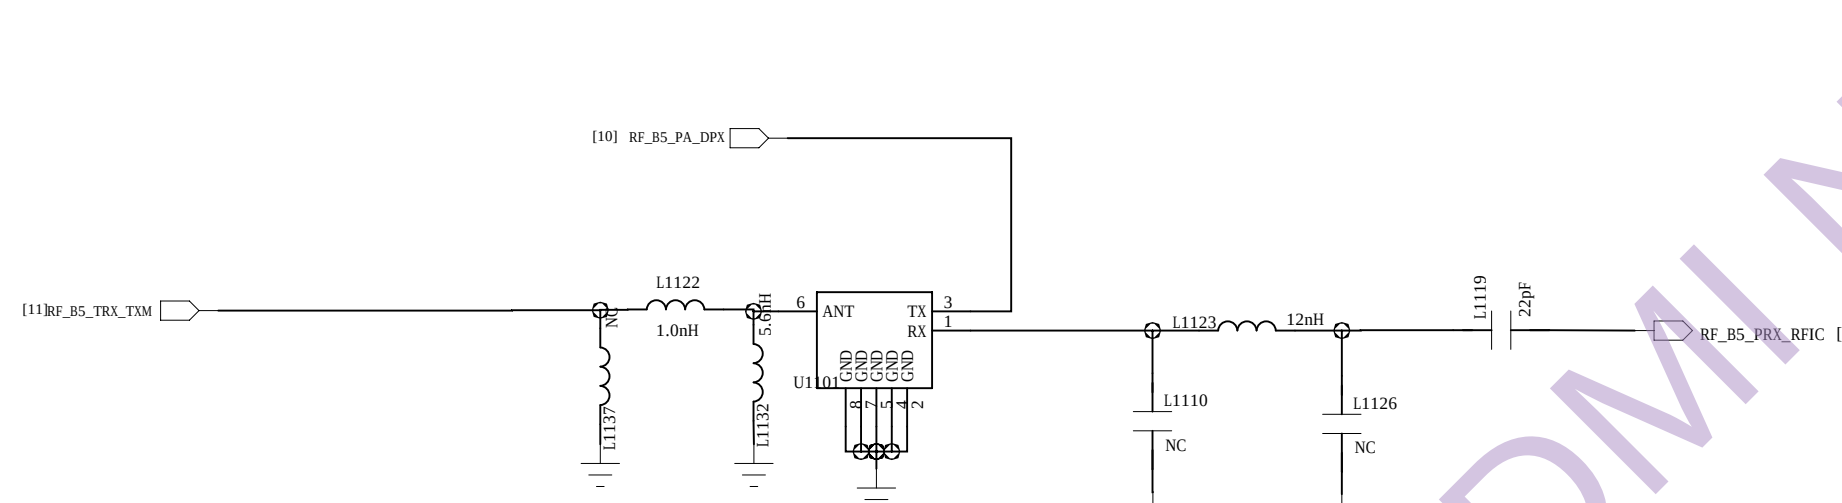

B34/39 PRX

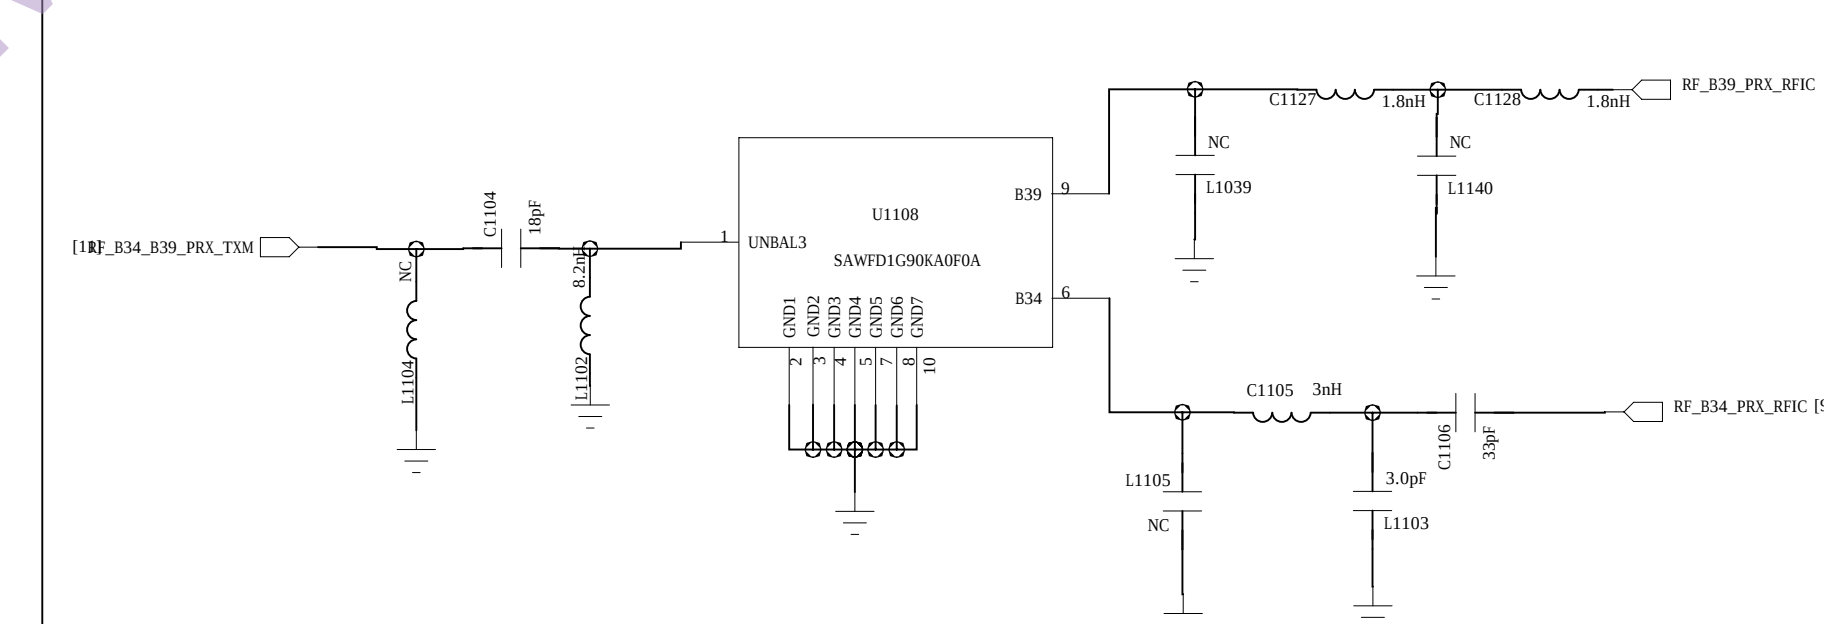


DPDT SWITCH

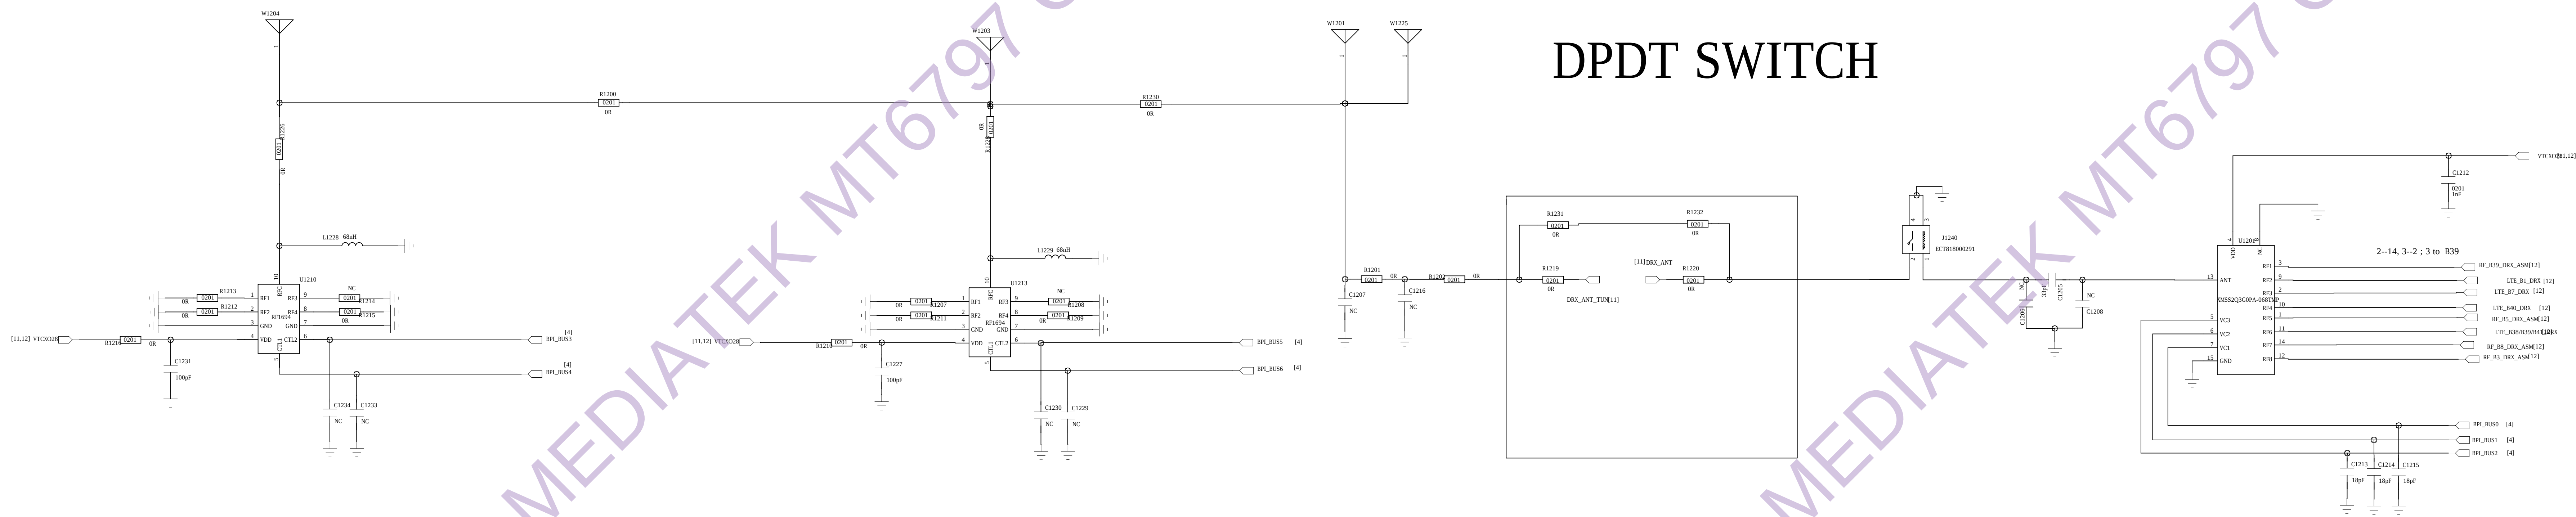


μζ³ø°ó,ζ½óμøμã

TOPAZ86.mbr-εγ

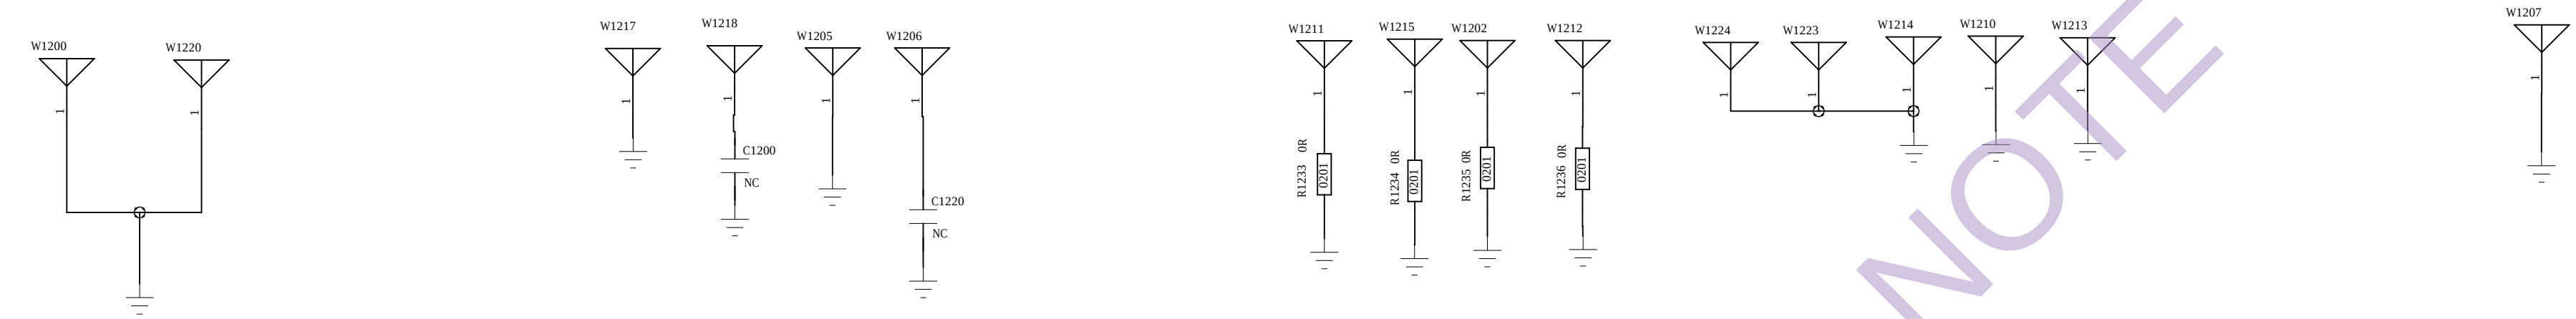


For power VTCX02 star connection

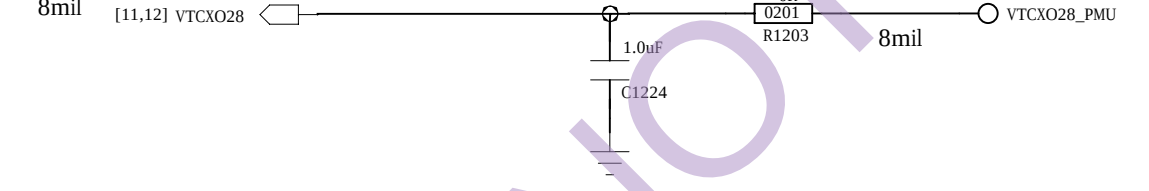


FDD

NO CA by xiaozhanglong DRX B1

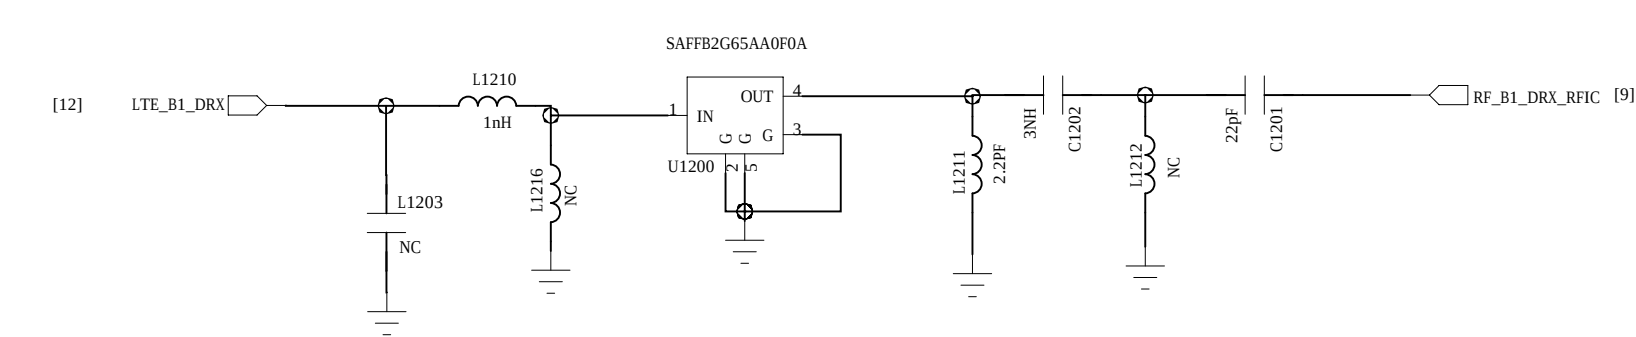


NO CA by xiaozhanglong DRX B3
B3 DRX

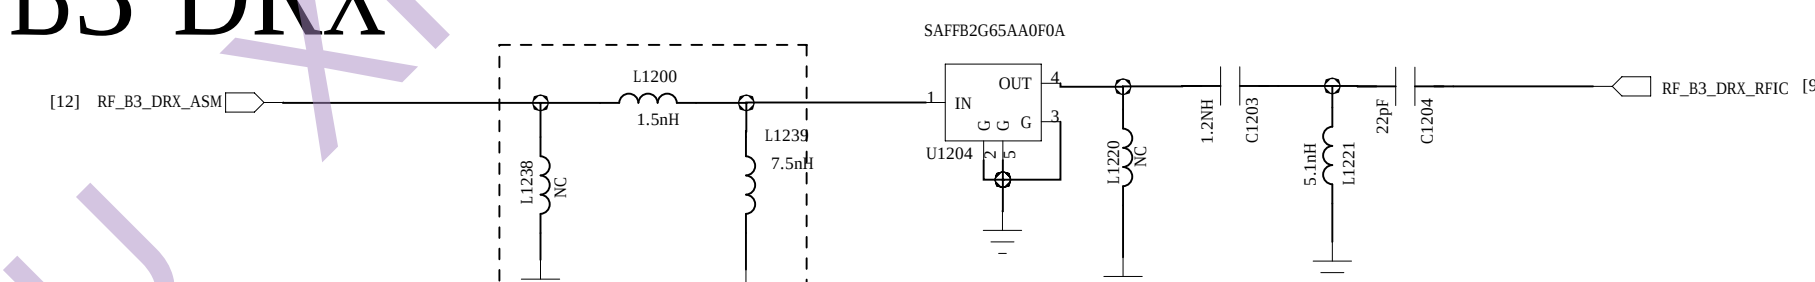


NO CA NEW


NO CA by xiaozhanglong DRX B41 B38

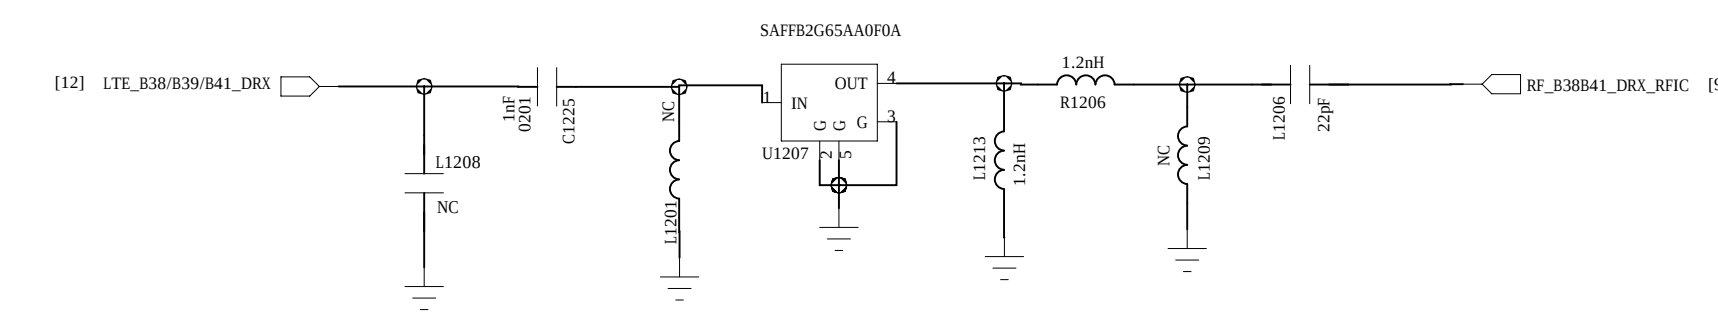

B7 DRX

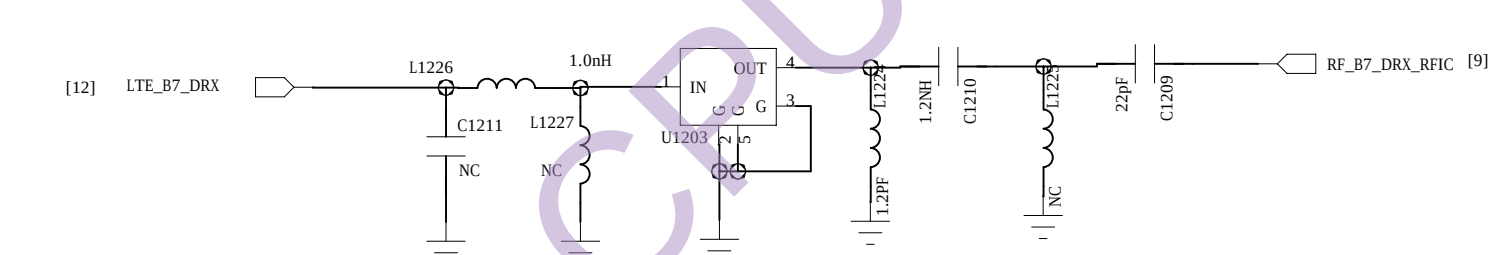
 1.1×0.9 

NO CA by xiaozhanglong DRX B39

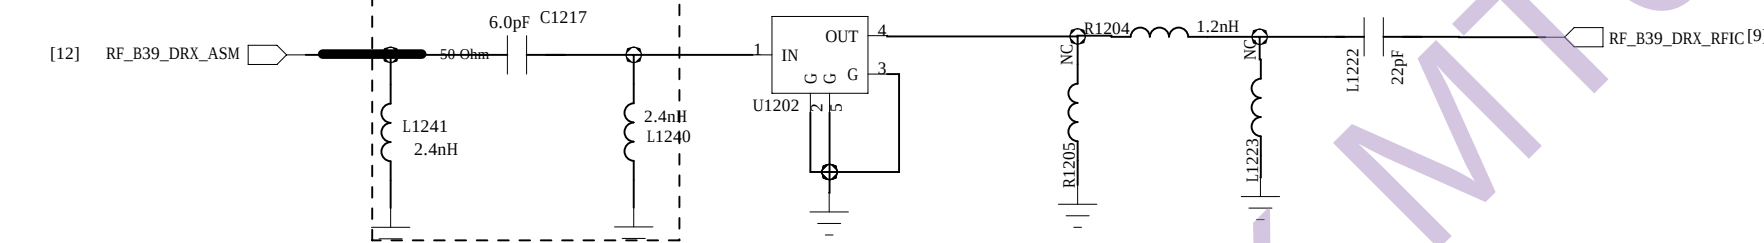
NO CA NEW

B8 DRX


1.1*0.9

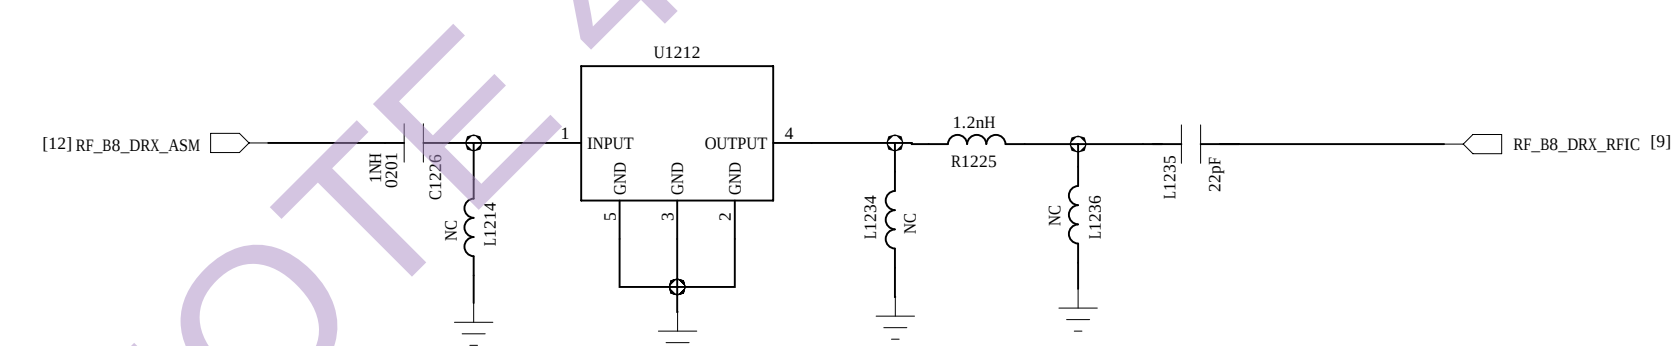

B40 DRX

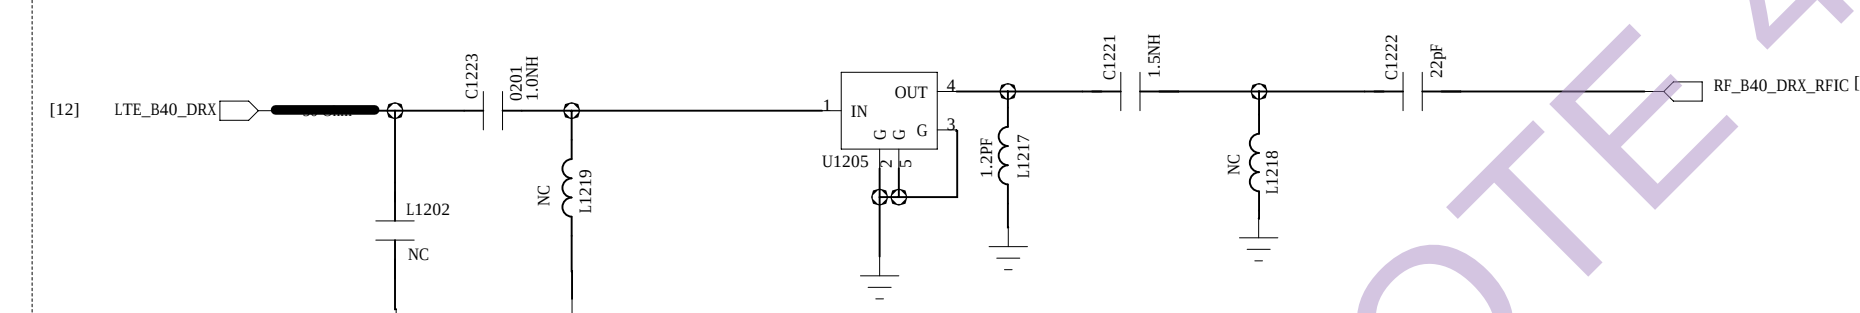


DRAWN: <Drawn By>		DATE: <Drawn Date>		COMPANY: LC	
CHECKED: <Checked By>		DATE: <Checked Date>		TITLE: CX880	
QUALITY CONTROL: <QC By>		DATE: <QC Date>		CODE: A0	DRAWING NO: <Drawing Number>
RELEASED: <Released By>		DATE: <Release Date>		SCALE: <Scale>	REV: <Revision>
				SHEET 42	20

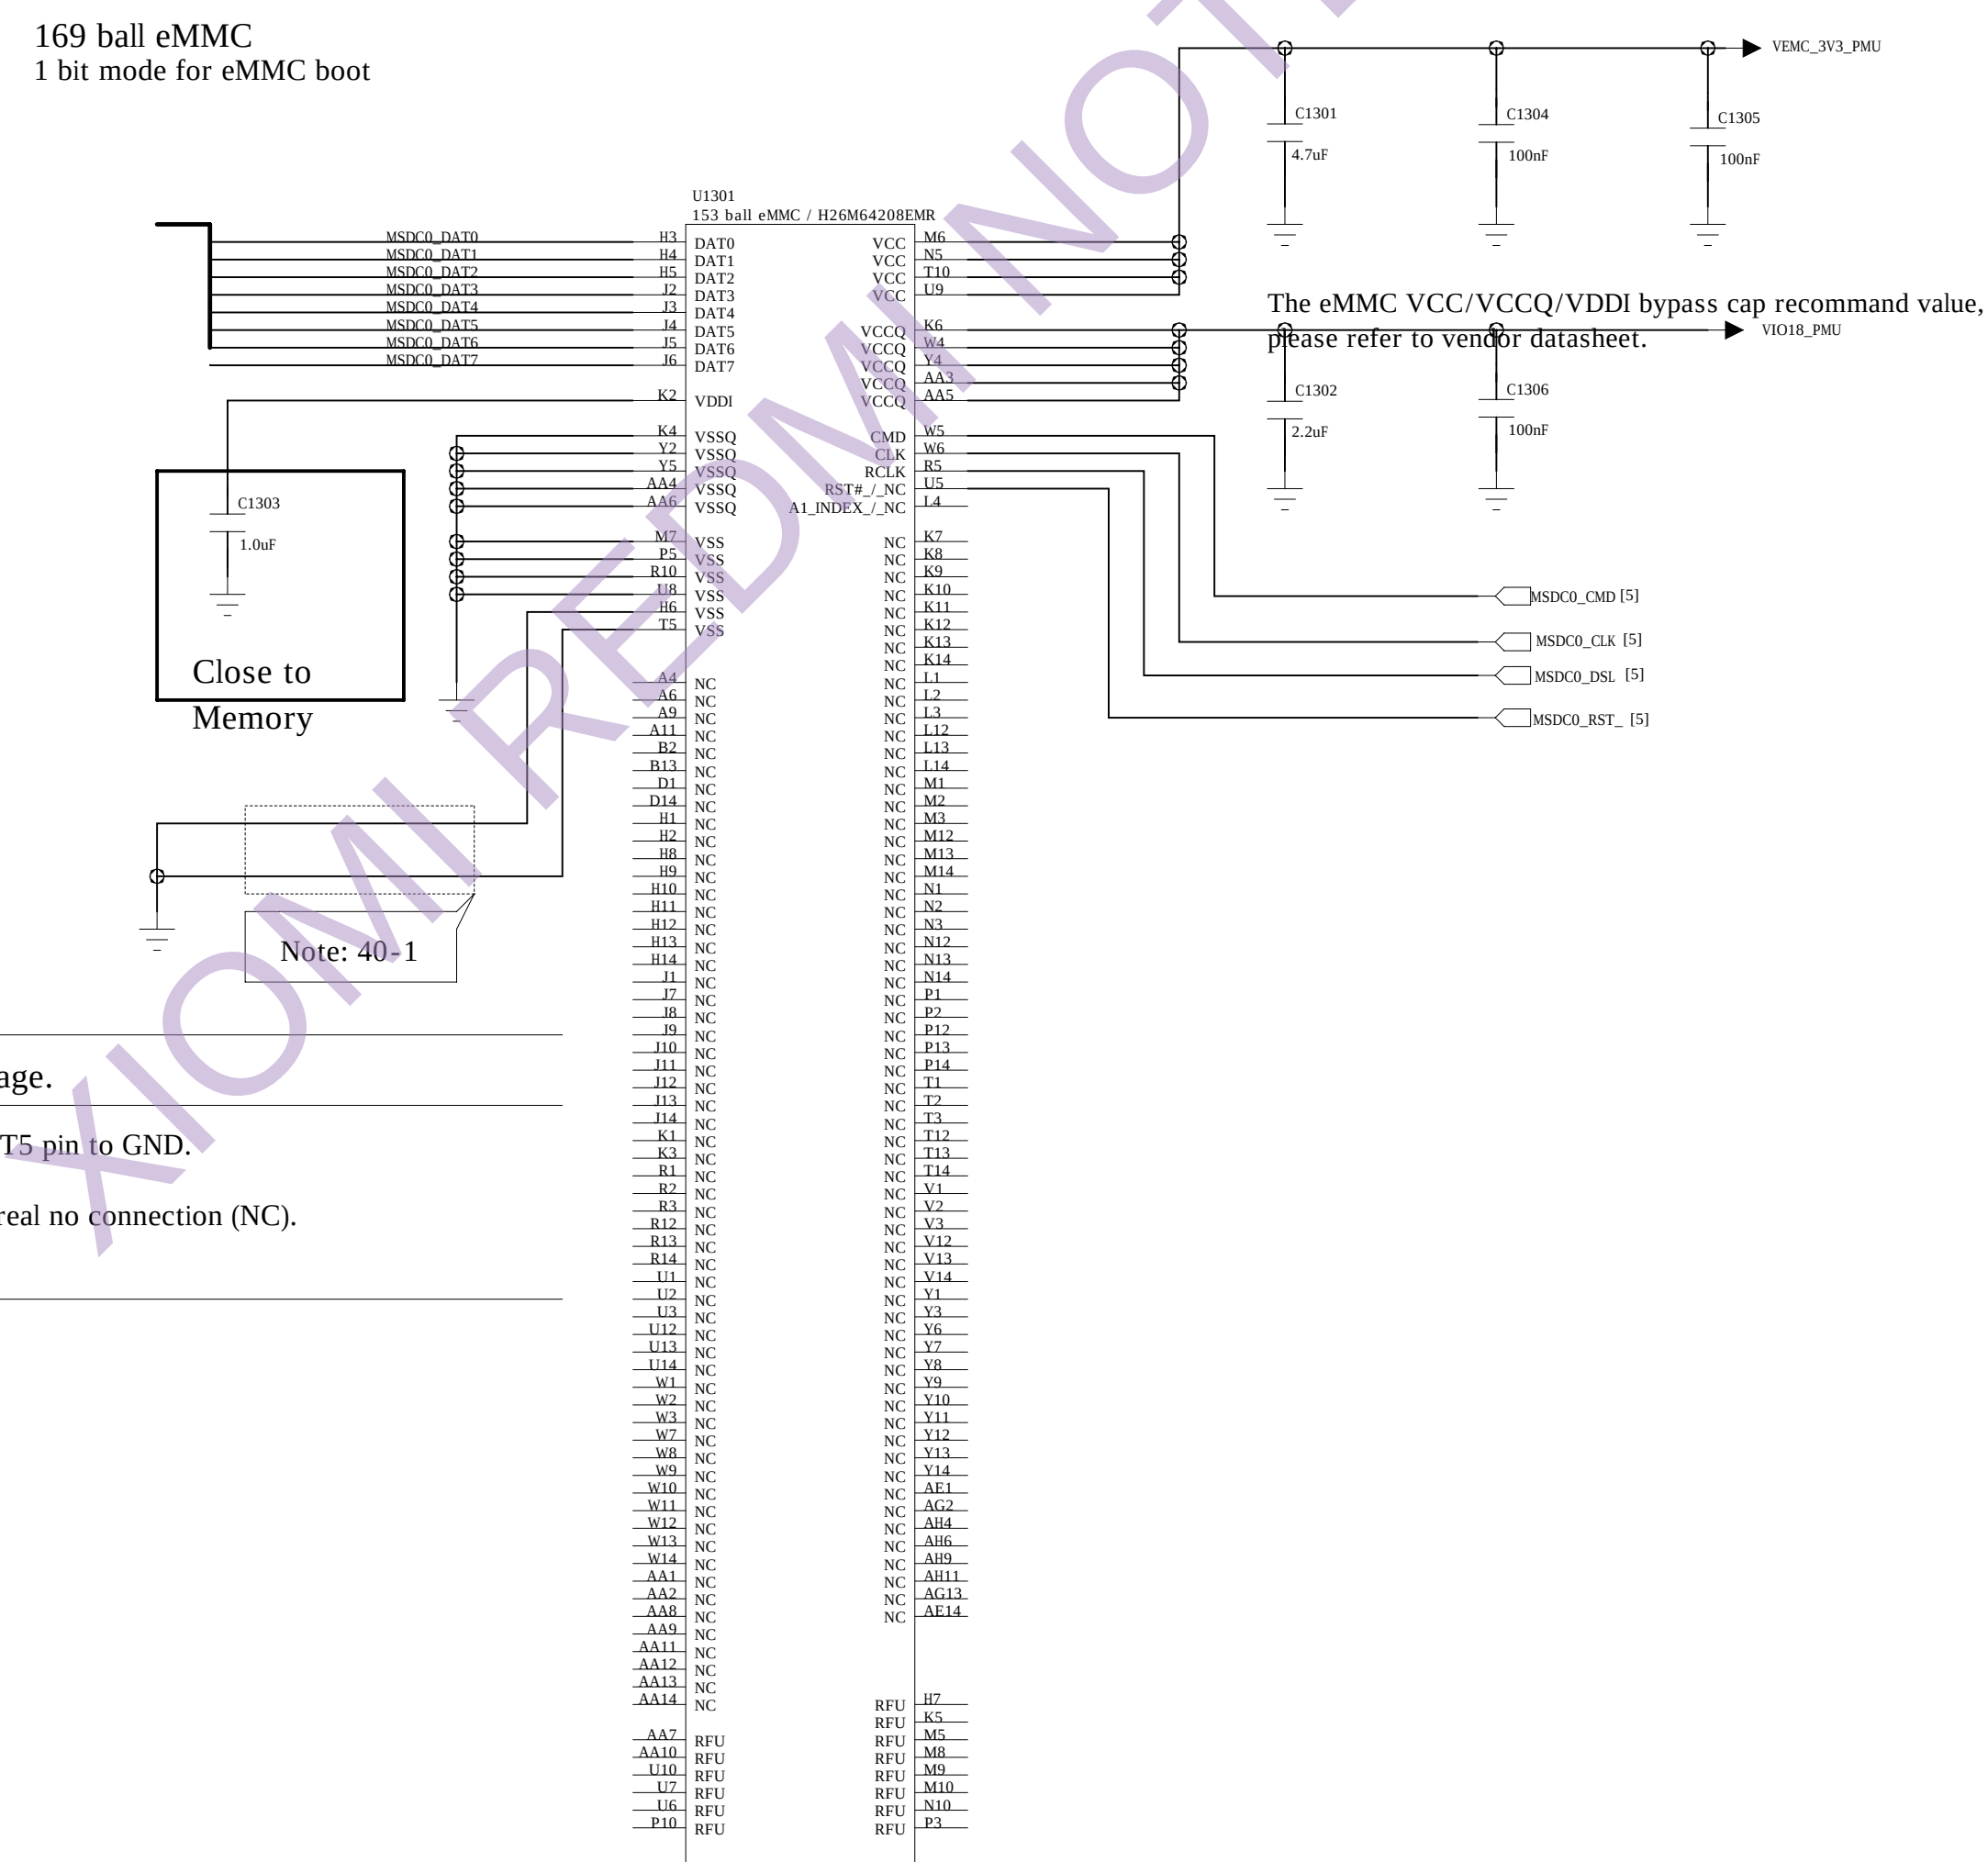

Schematic design notice of "40_MEMORY_eMMC" page.




Note 40-1: For eMMC 5.0/5.1, connect eMMC's H6 & T5 pin to GND.
For eMMC 4.5, check eMMC's H6 & T5 is real no connection (NC).

Wifi & GPS & FM







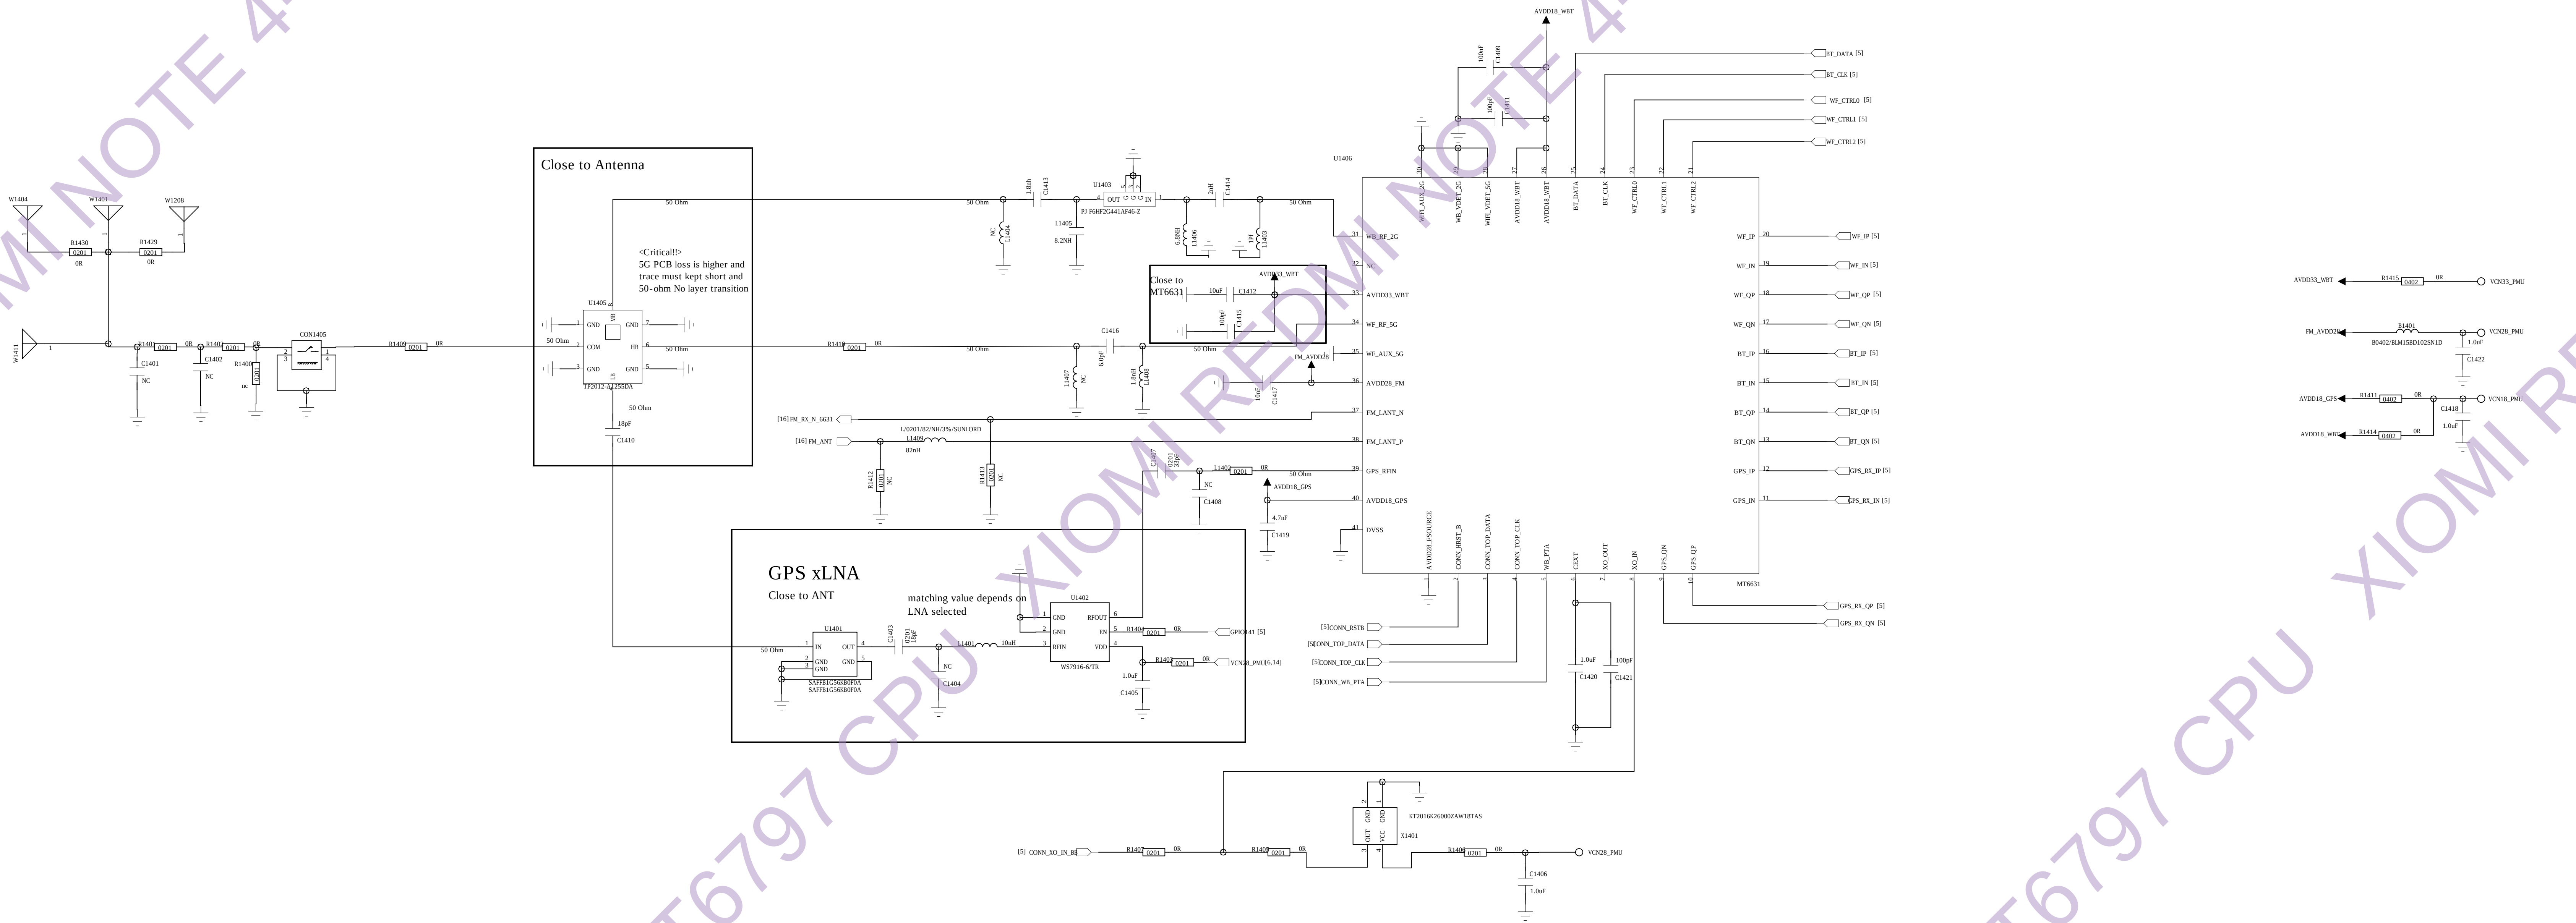


COMPANY:		LC	
TITLE:		CX880	
DRAWN:	<Drawn By>	DATE:	<Drawn Date>
CHECKED:	<Checked By>	DATE:	<Checked Date>
QUALITY CONTROL:	<QC By>	DATE:	<QC Date>
RELEASED:	<Released By>	DATE:	<Release Date>
CODE:	SIZE:	DRAWING NO:	REV:
<Code>	A0	<Drawing Number>	<Revision>
SCALE: <Scale>		SHEET: 14 20	

REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

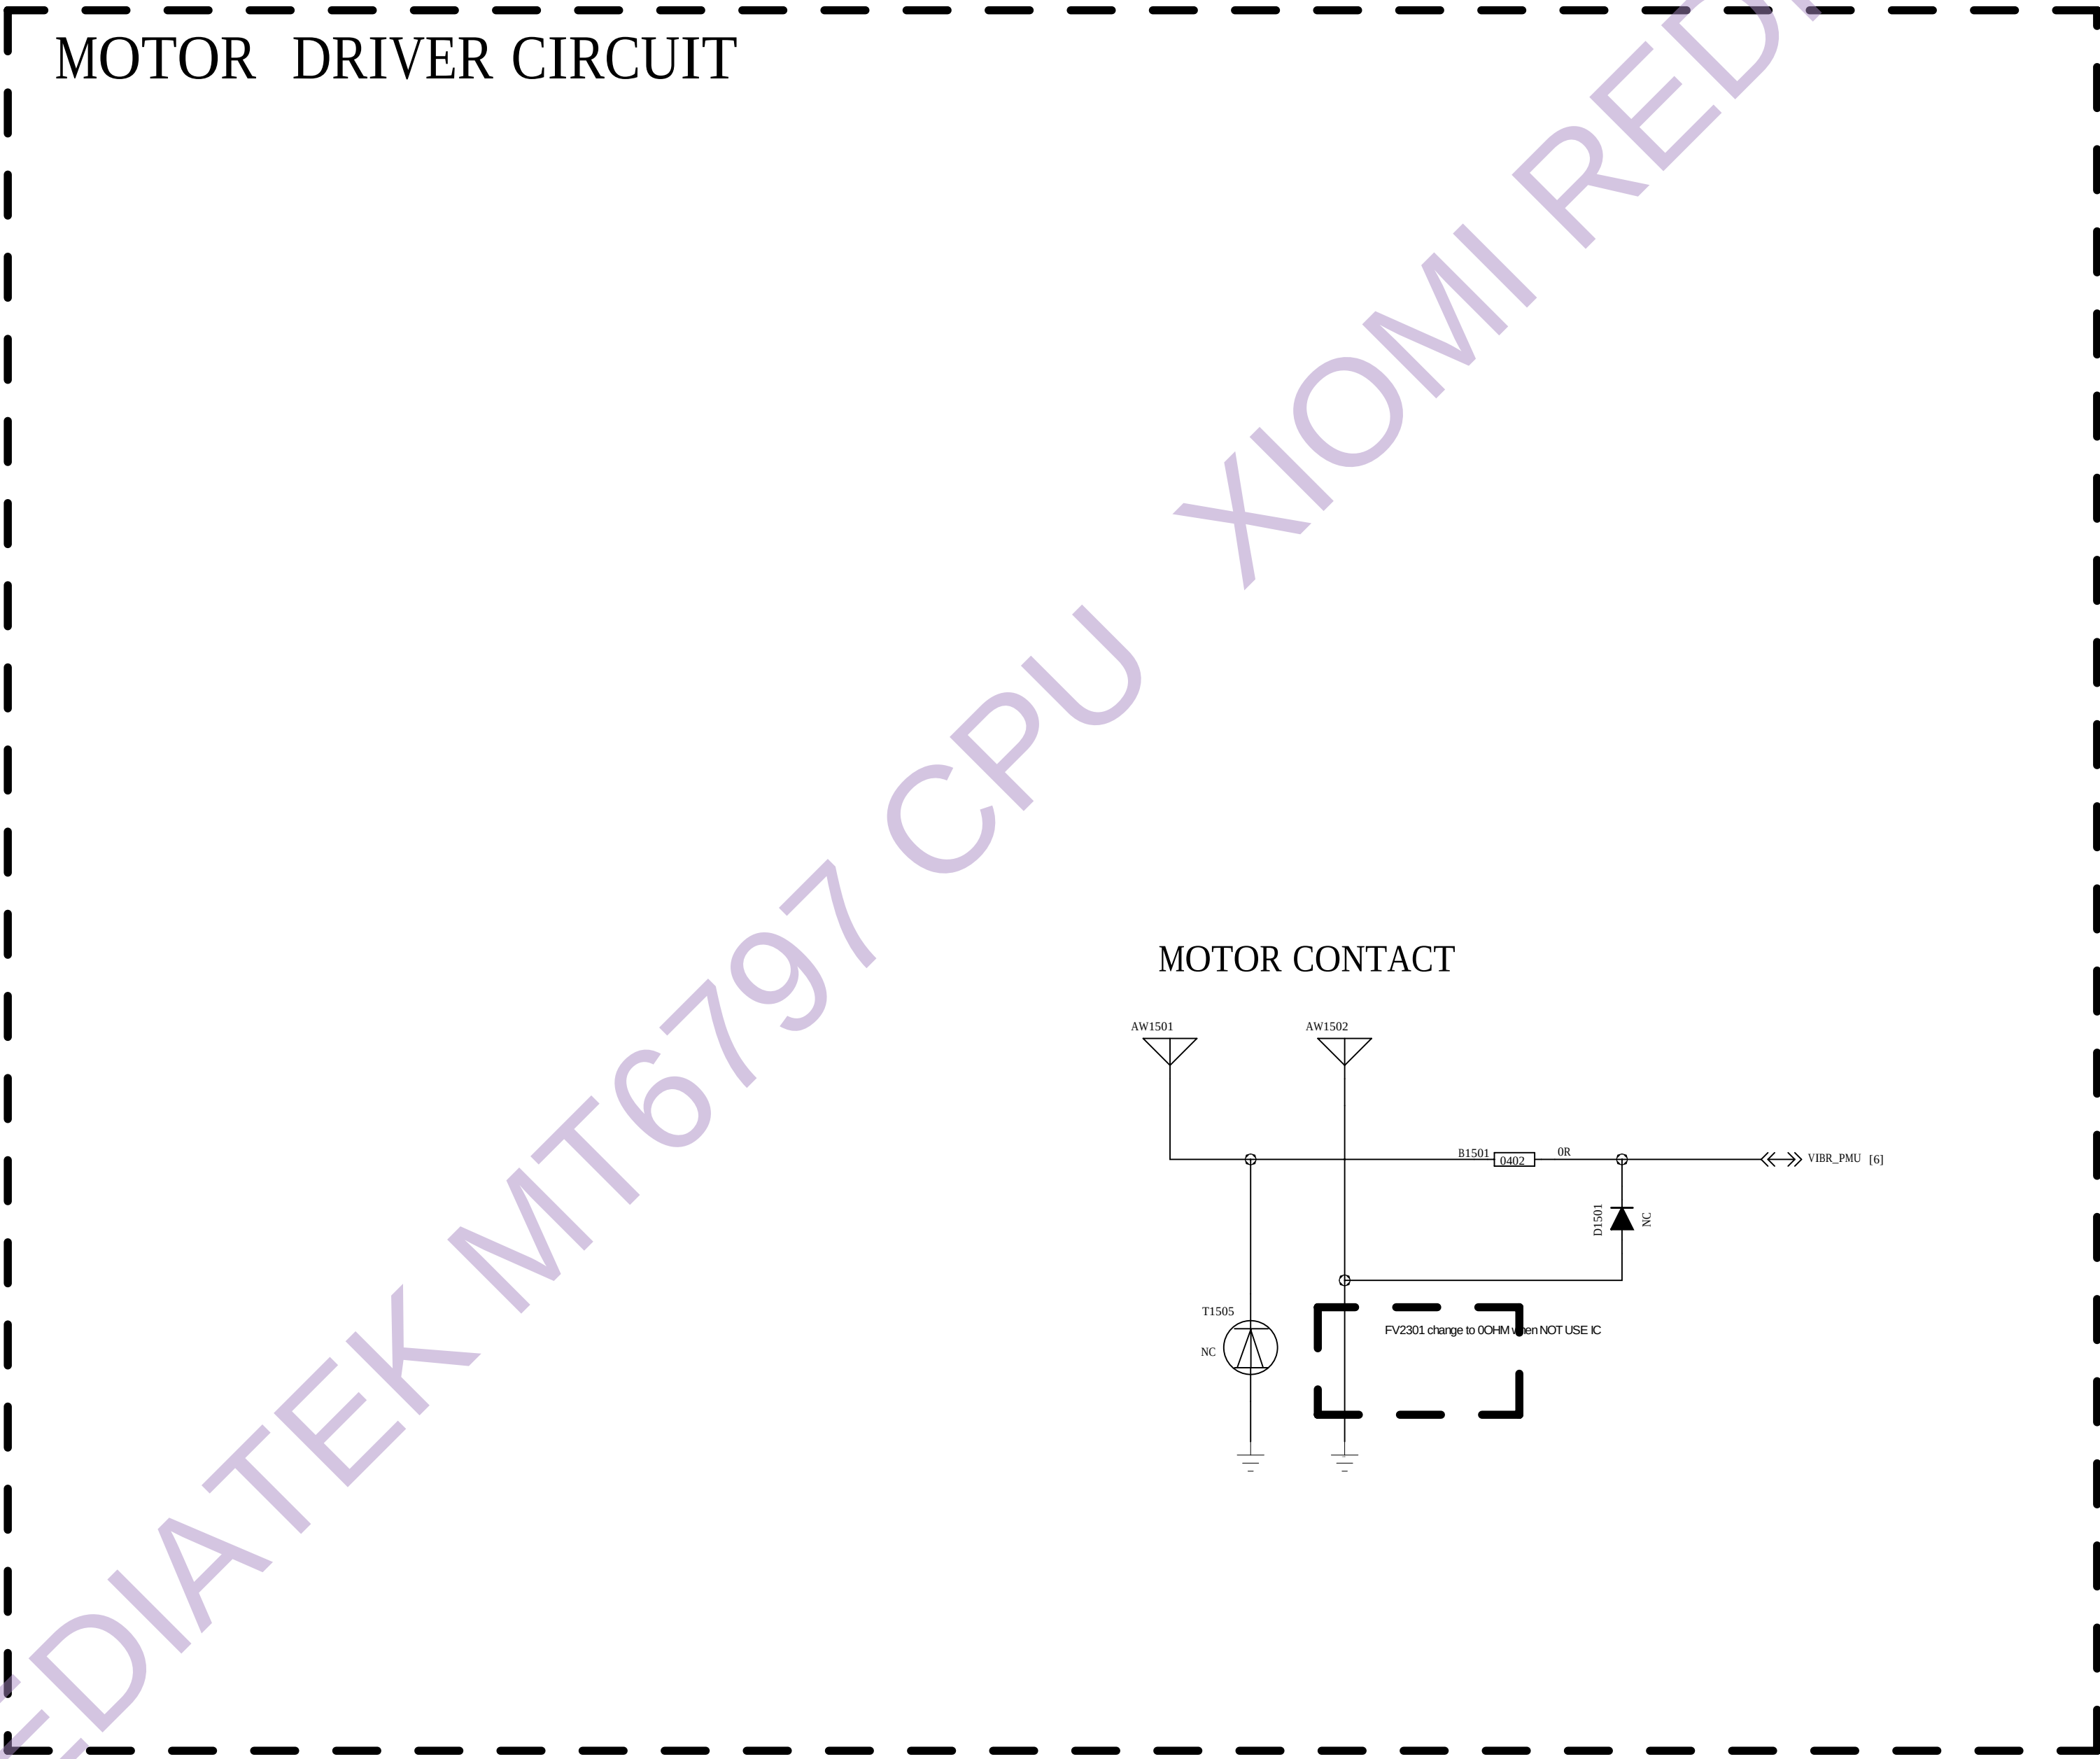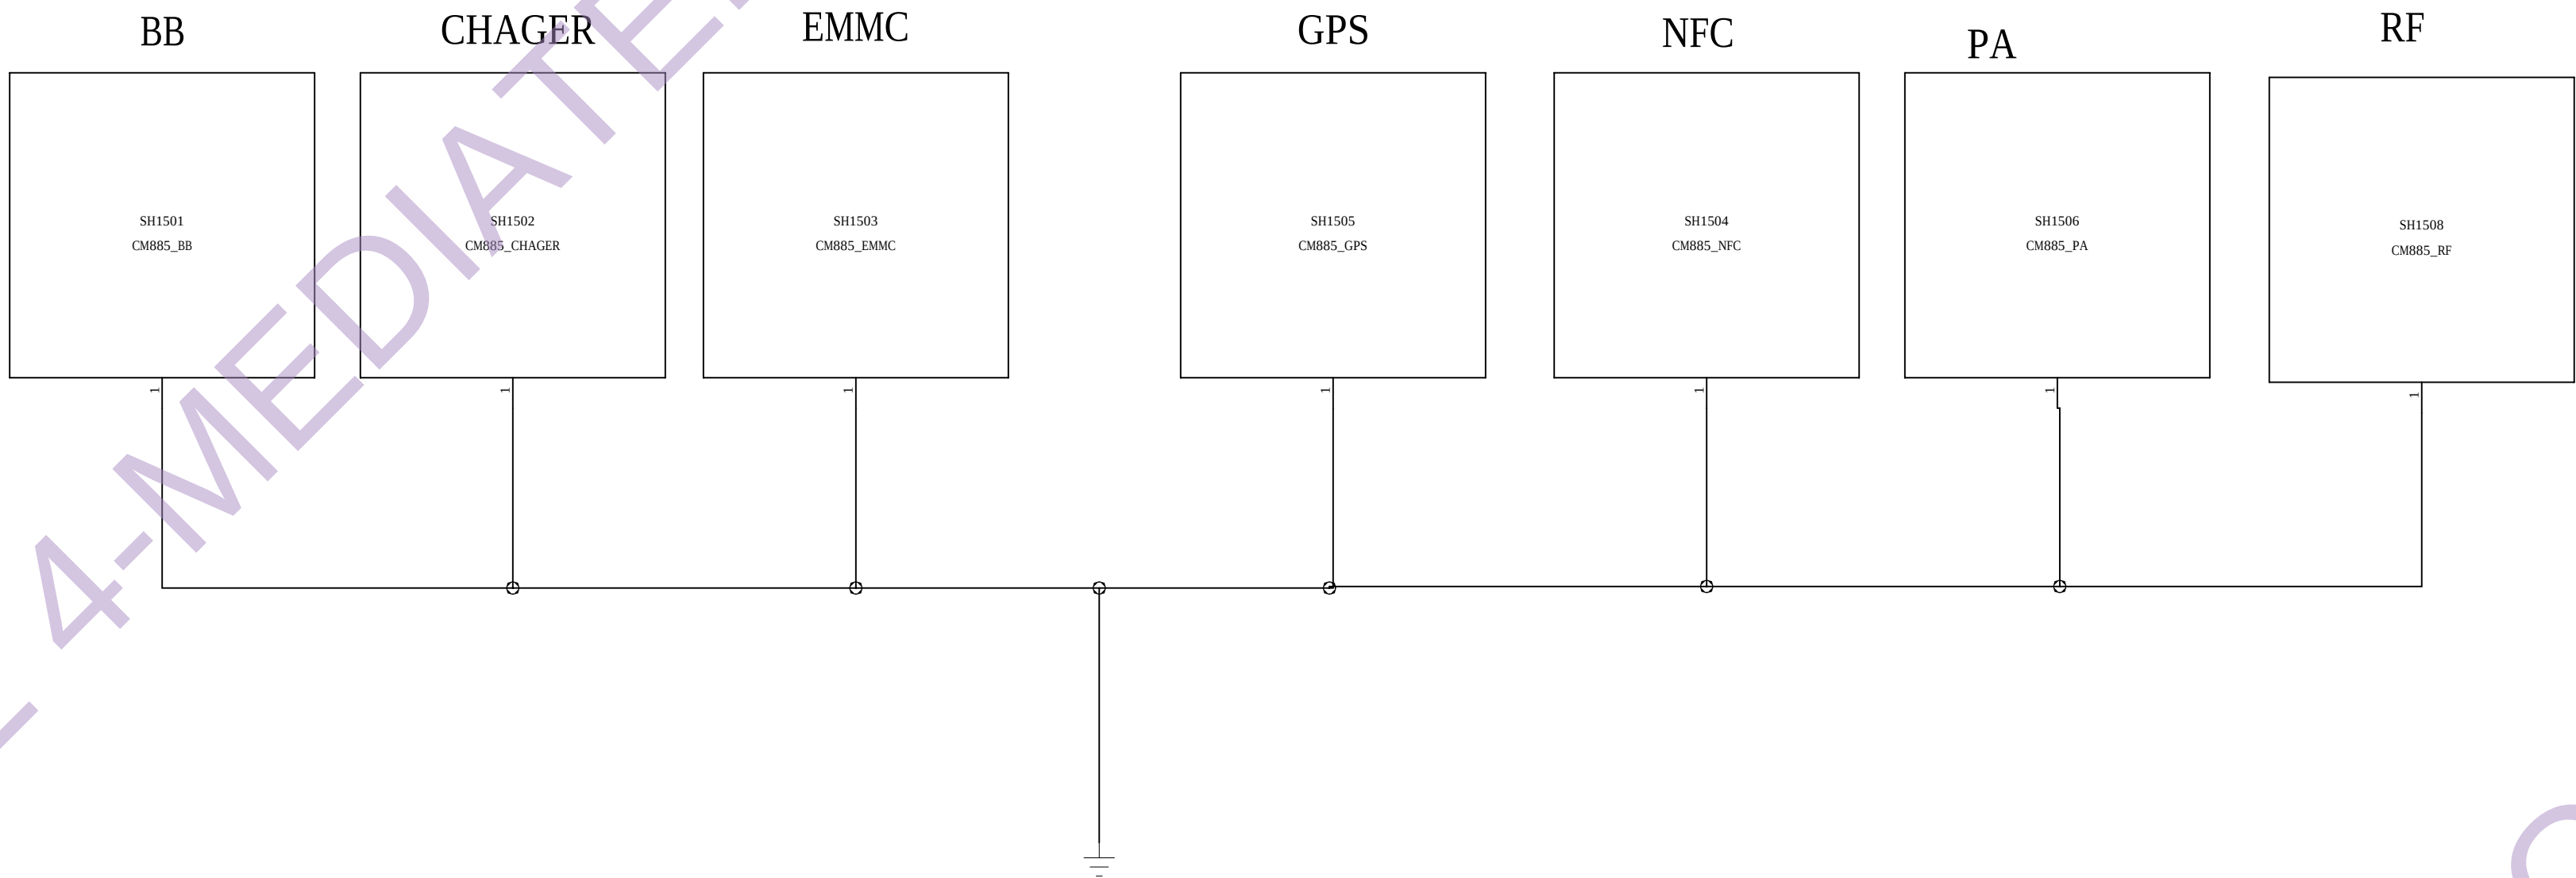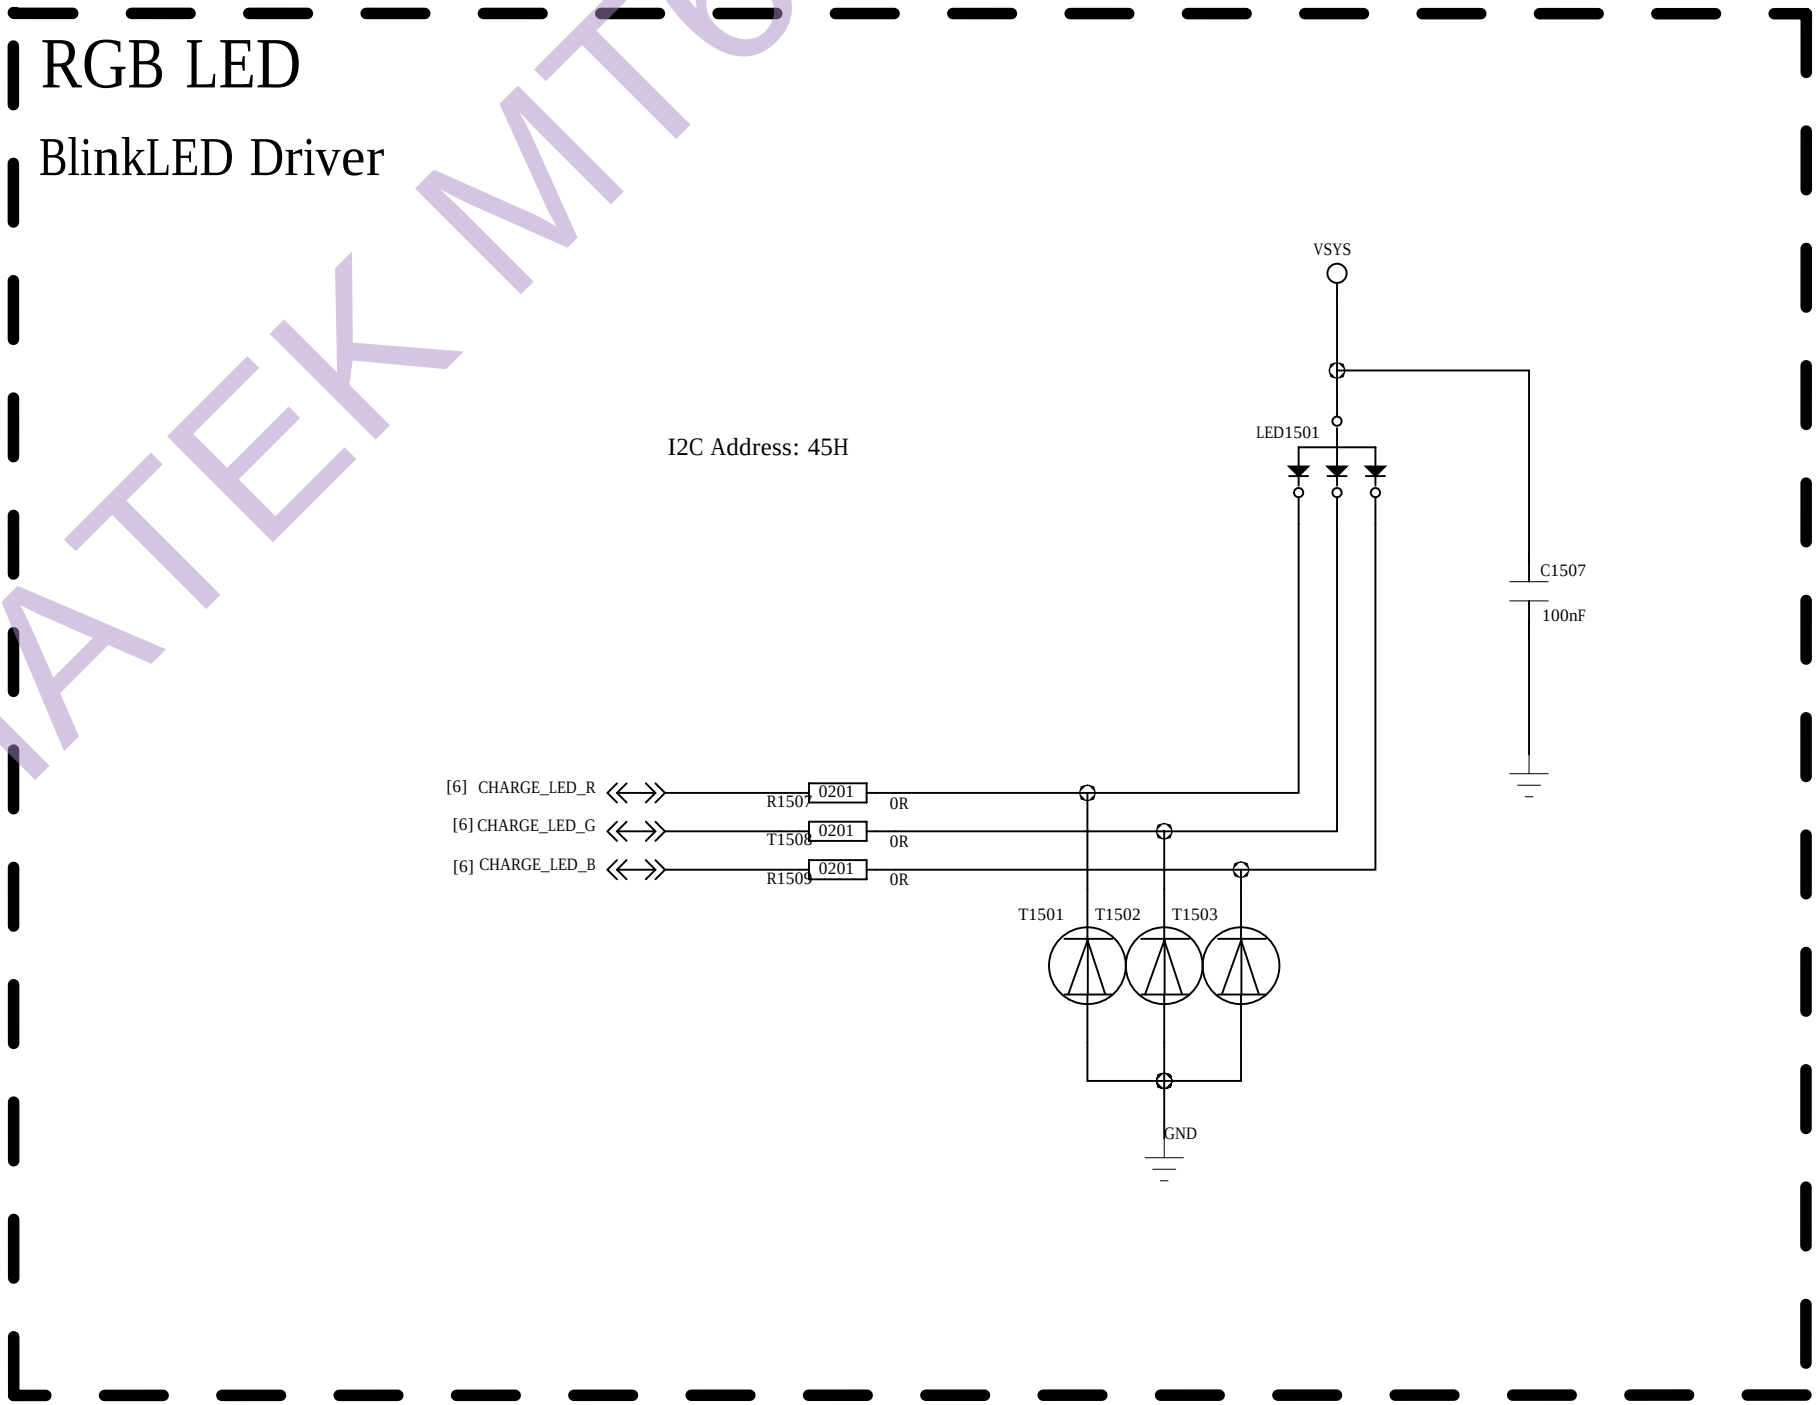

REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

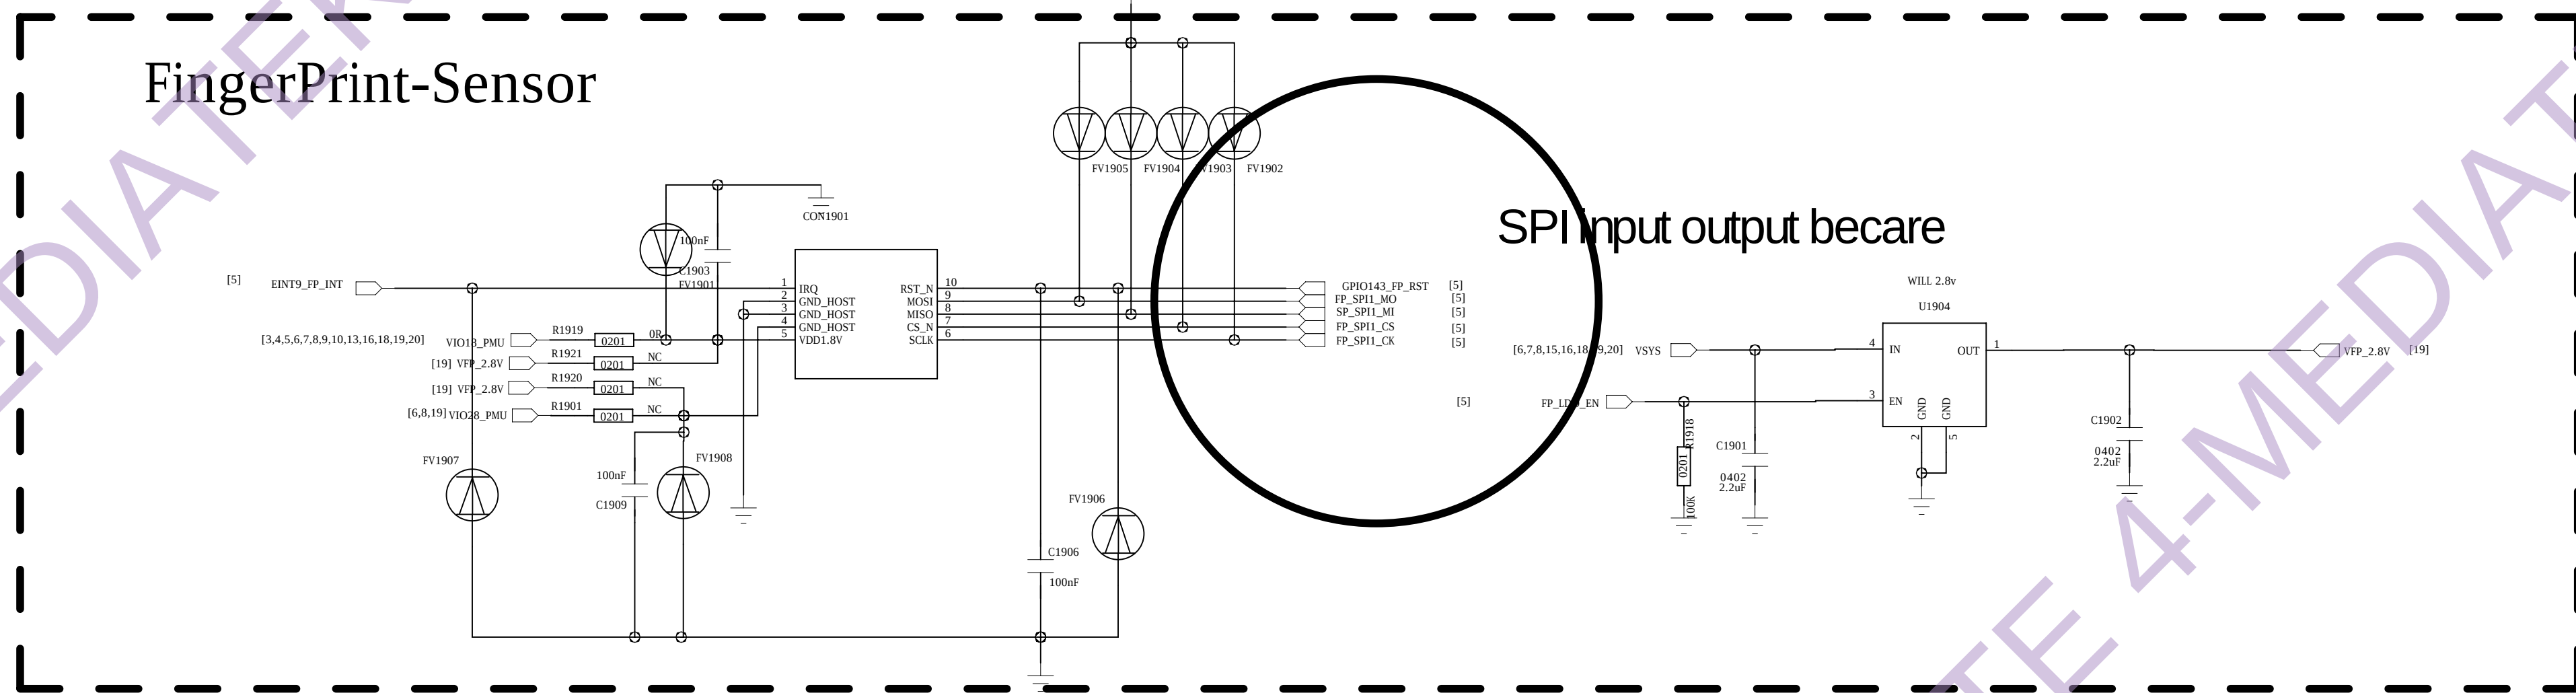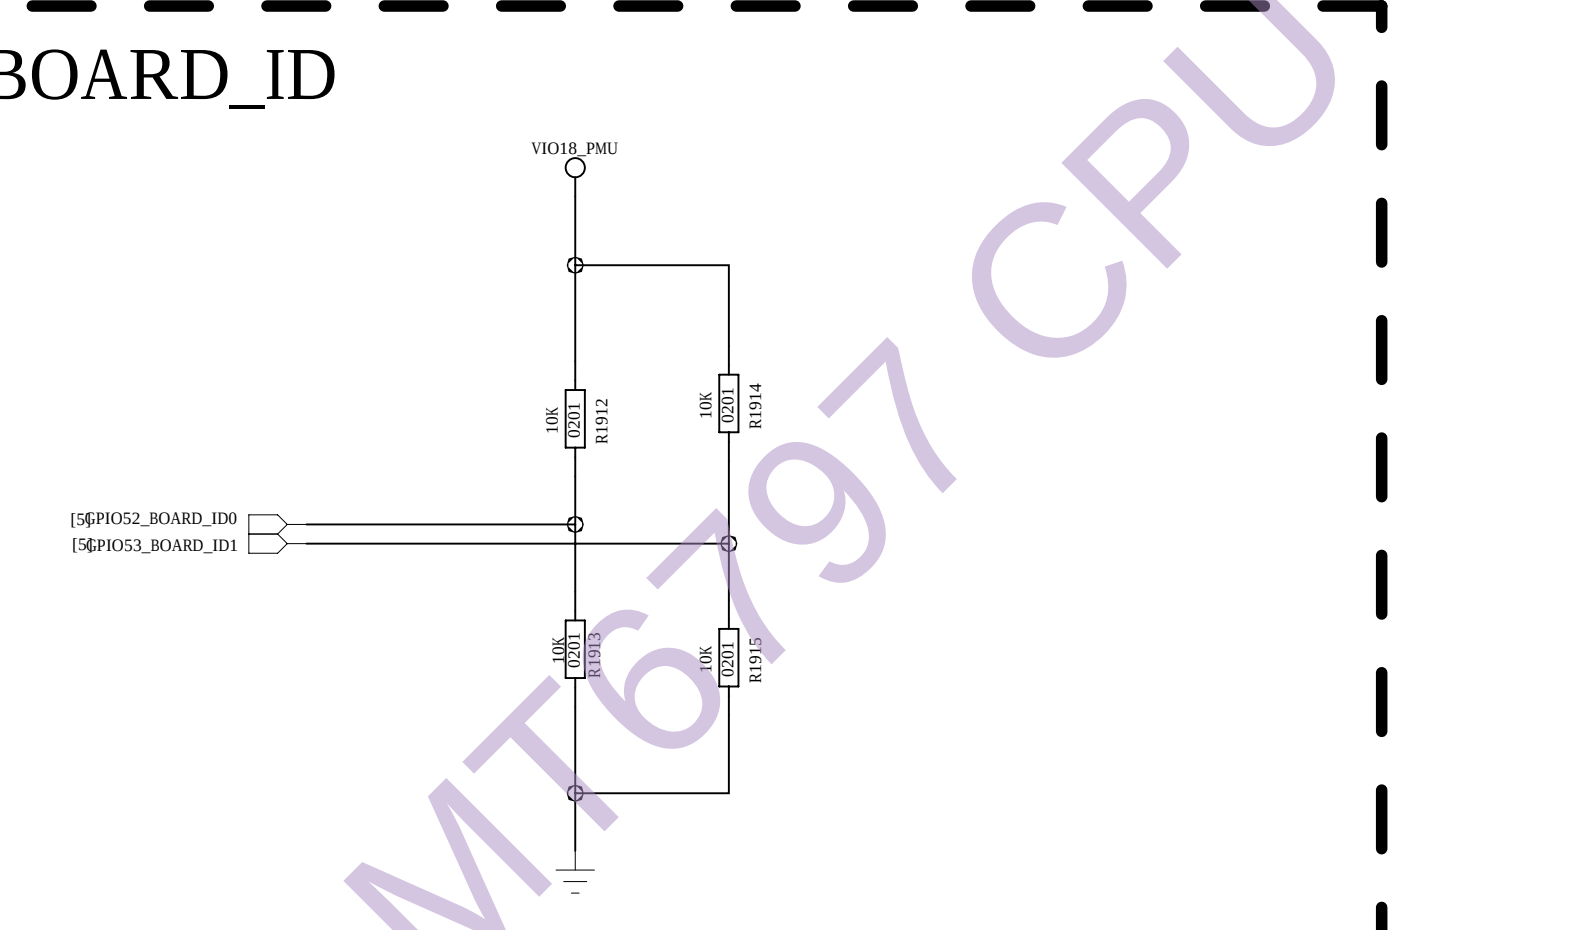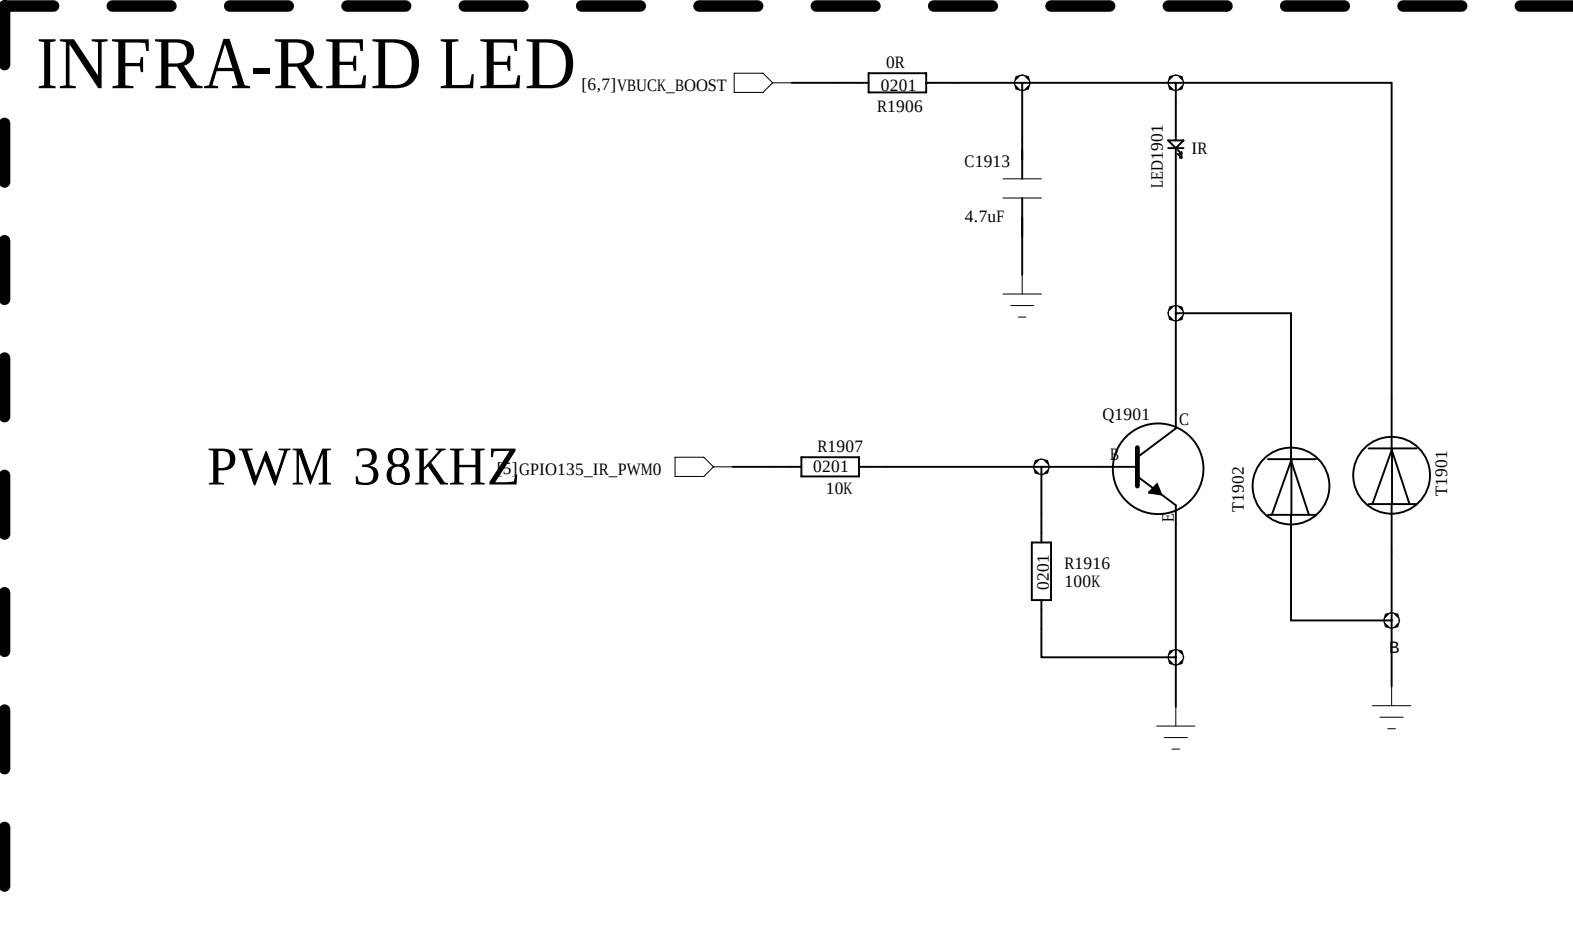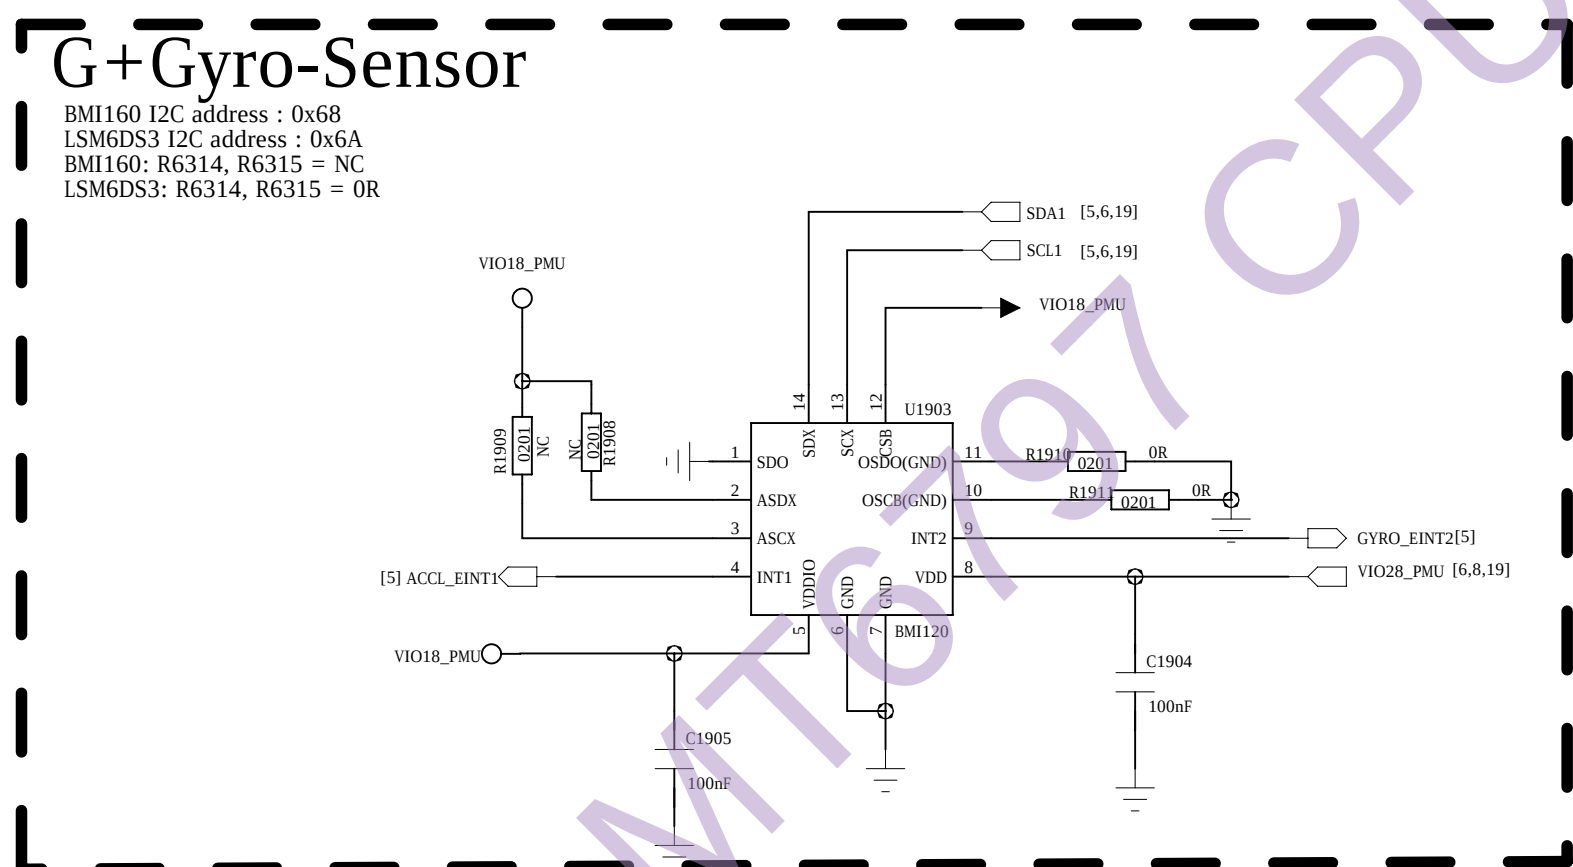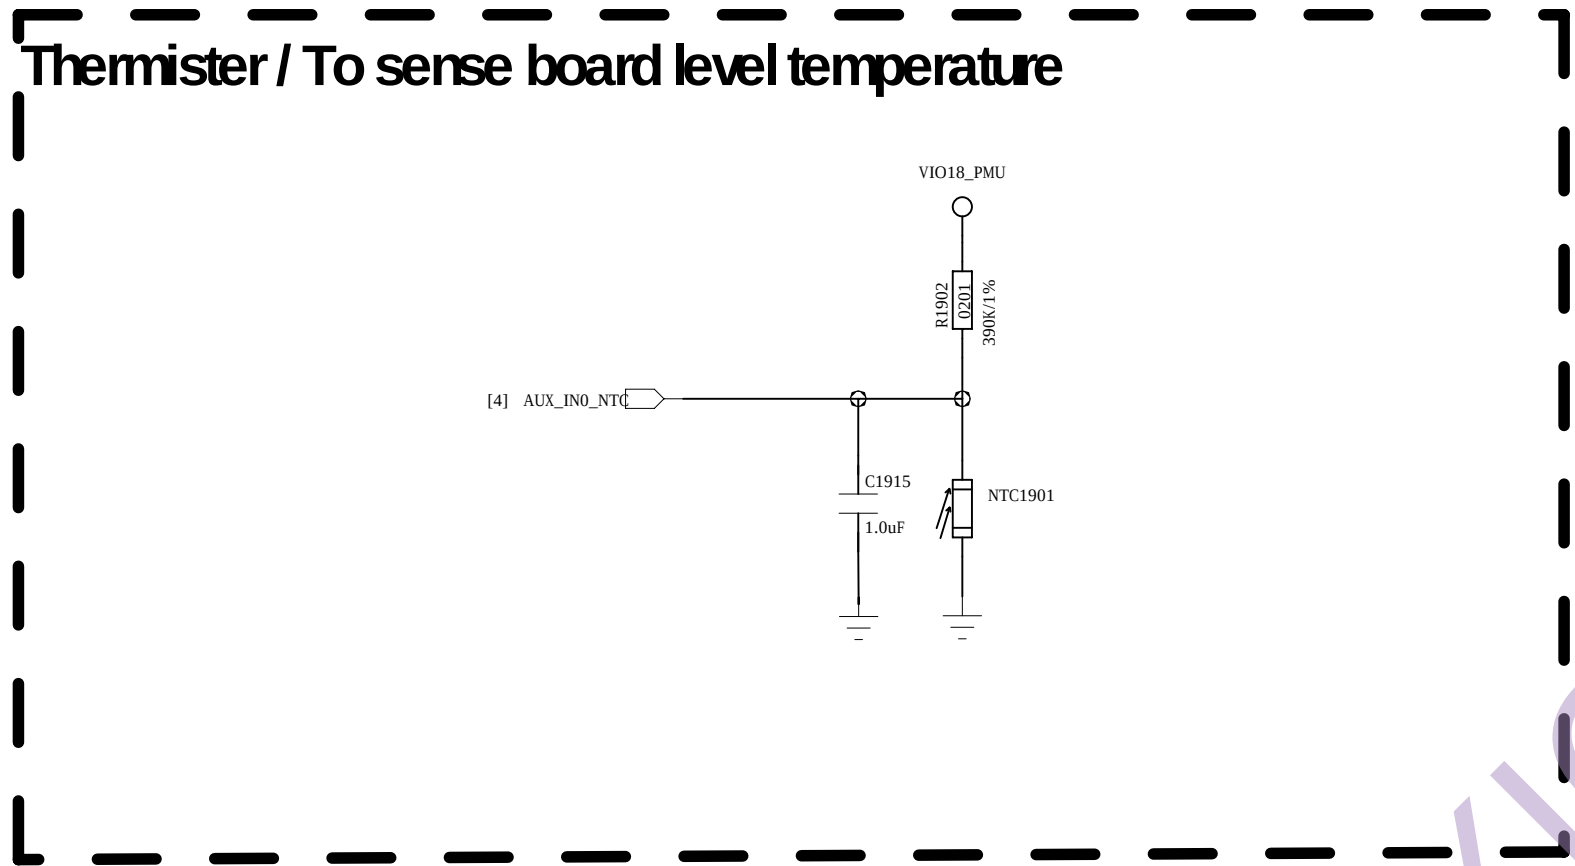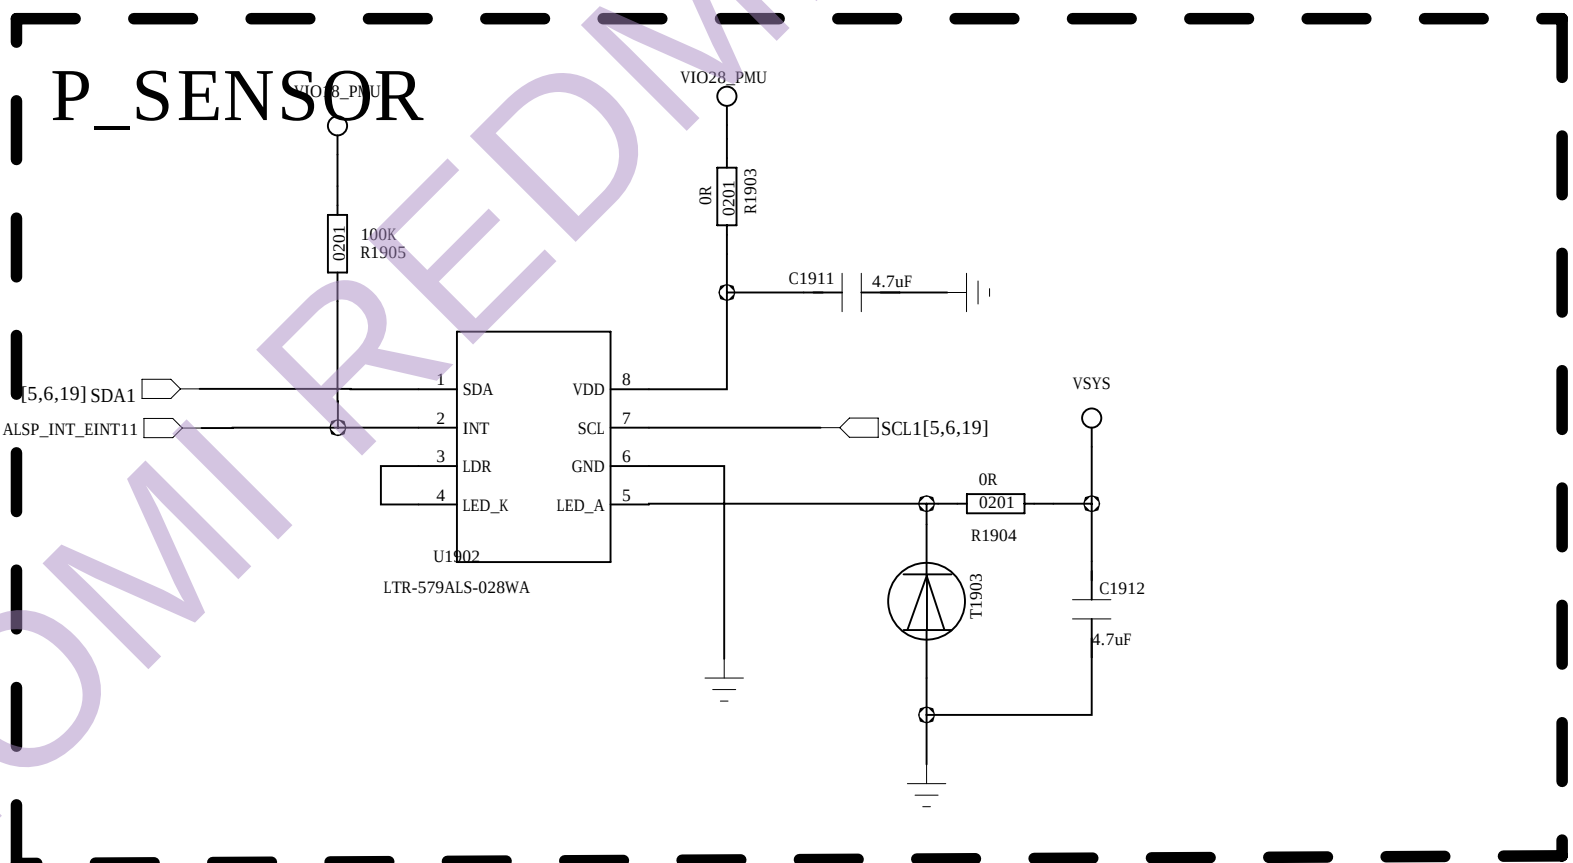
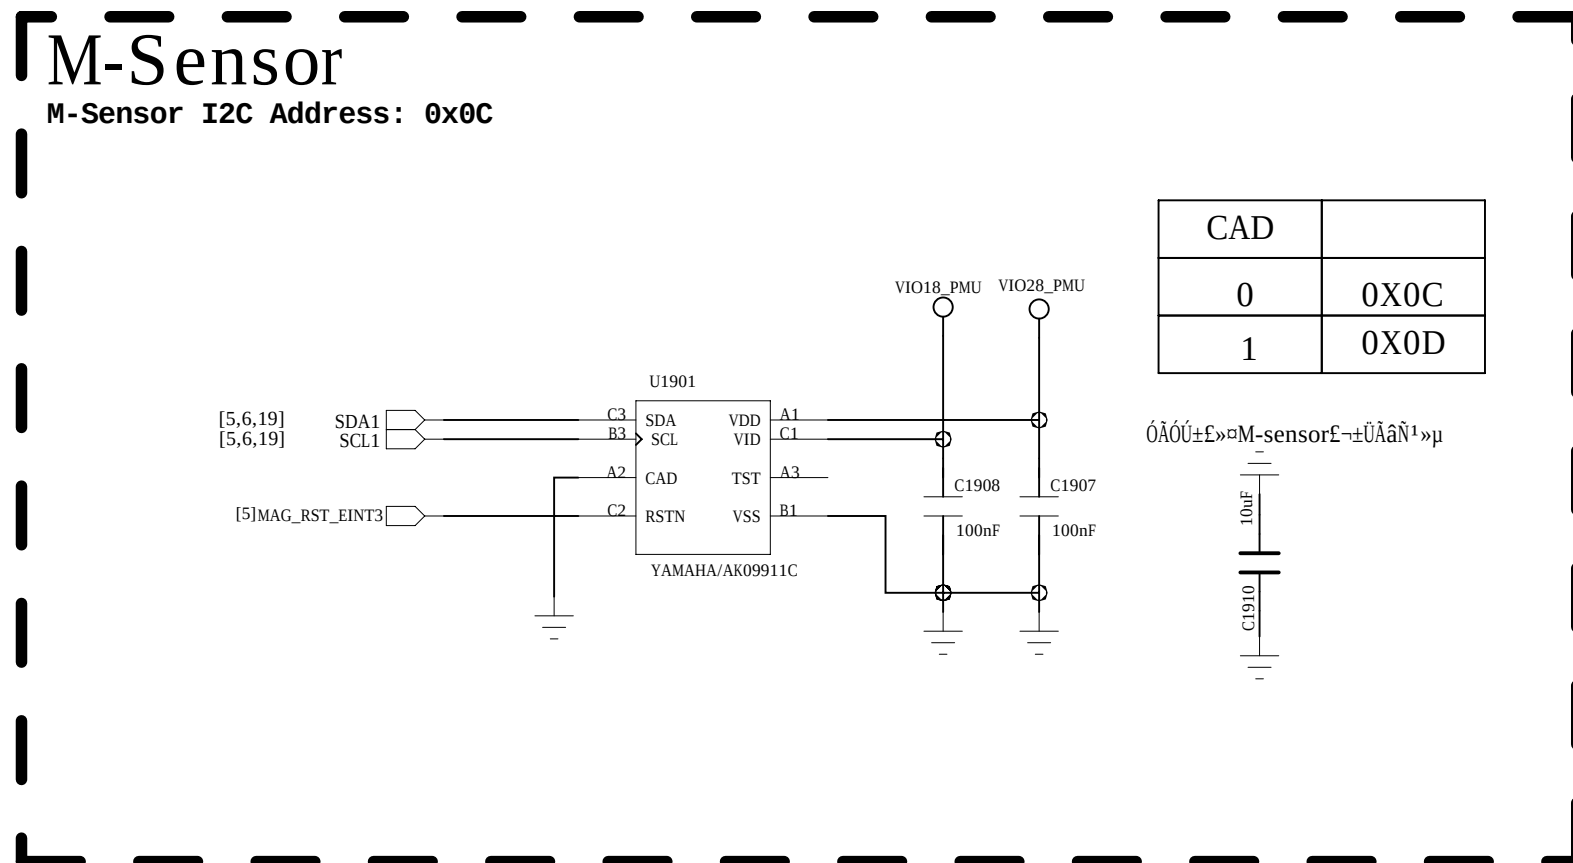


MARK POINT




COMPANY			
LC			
TITLE			
CX880			
DRAWN: <Drawn By>	DATE: <Drawn Date>	CODE:	SIZE:
CHECKED: <Checked By>	DATE: <Checked Date>	DRAWING NO:	REV:
QUALITY CONTROL: <QC By>	DATE: <QC Date>	<Code> A0 <Drawing Number>Revision>	
RELEASED: <Release By>	DATE: <Release Date>	SCALE: <Scale>	
SHEET 60		20	

REVISION RECORD			
LT#	ECO NO.	APPROVED	DATE

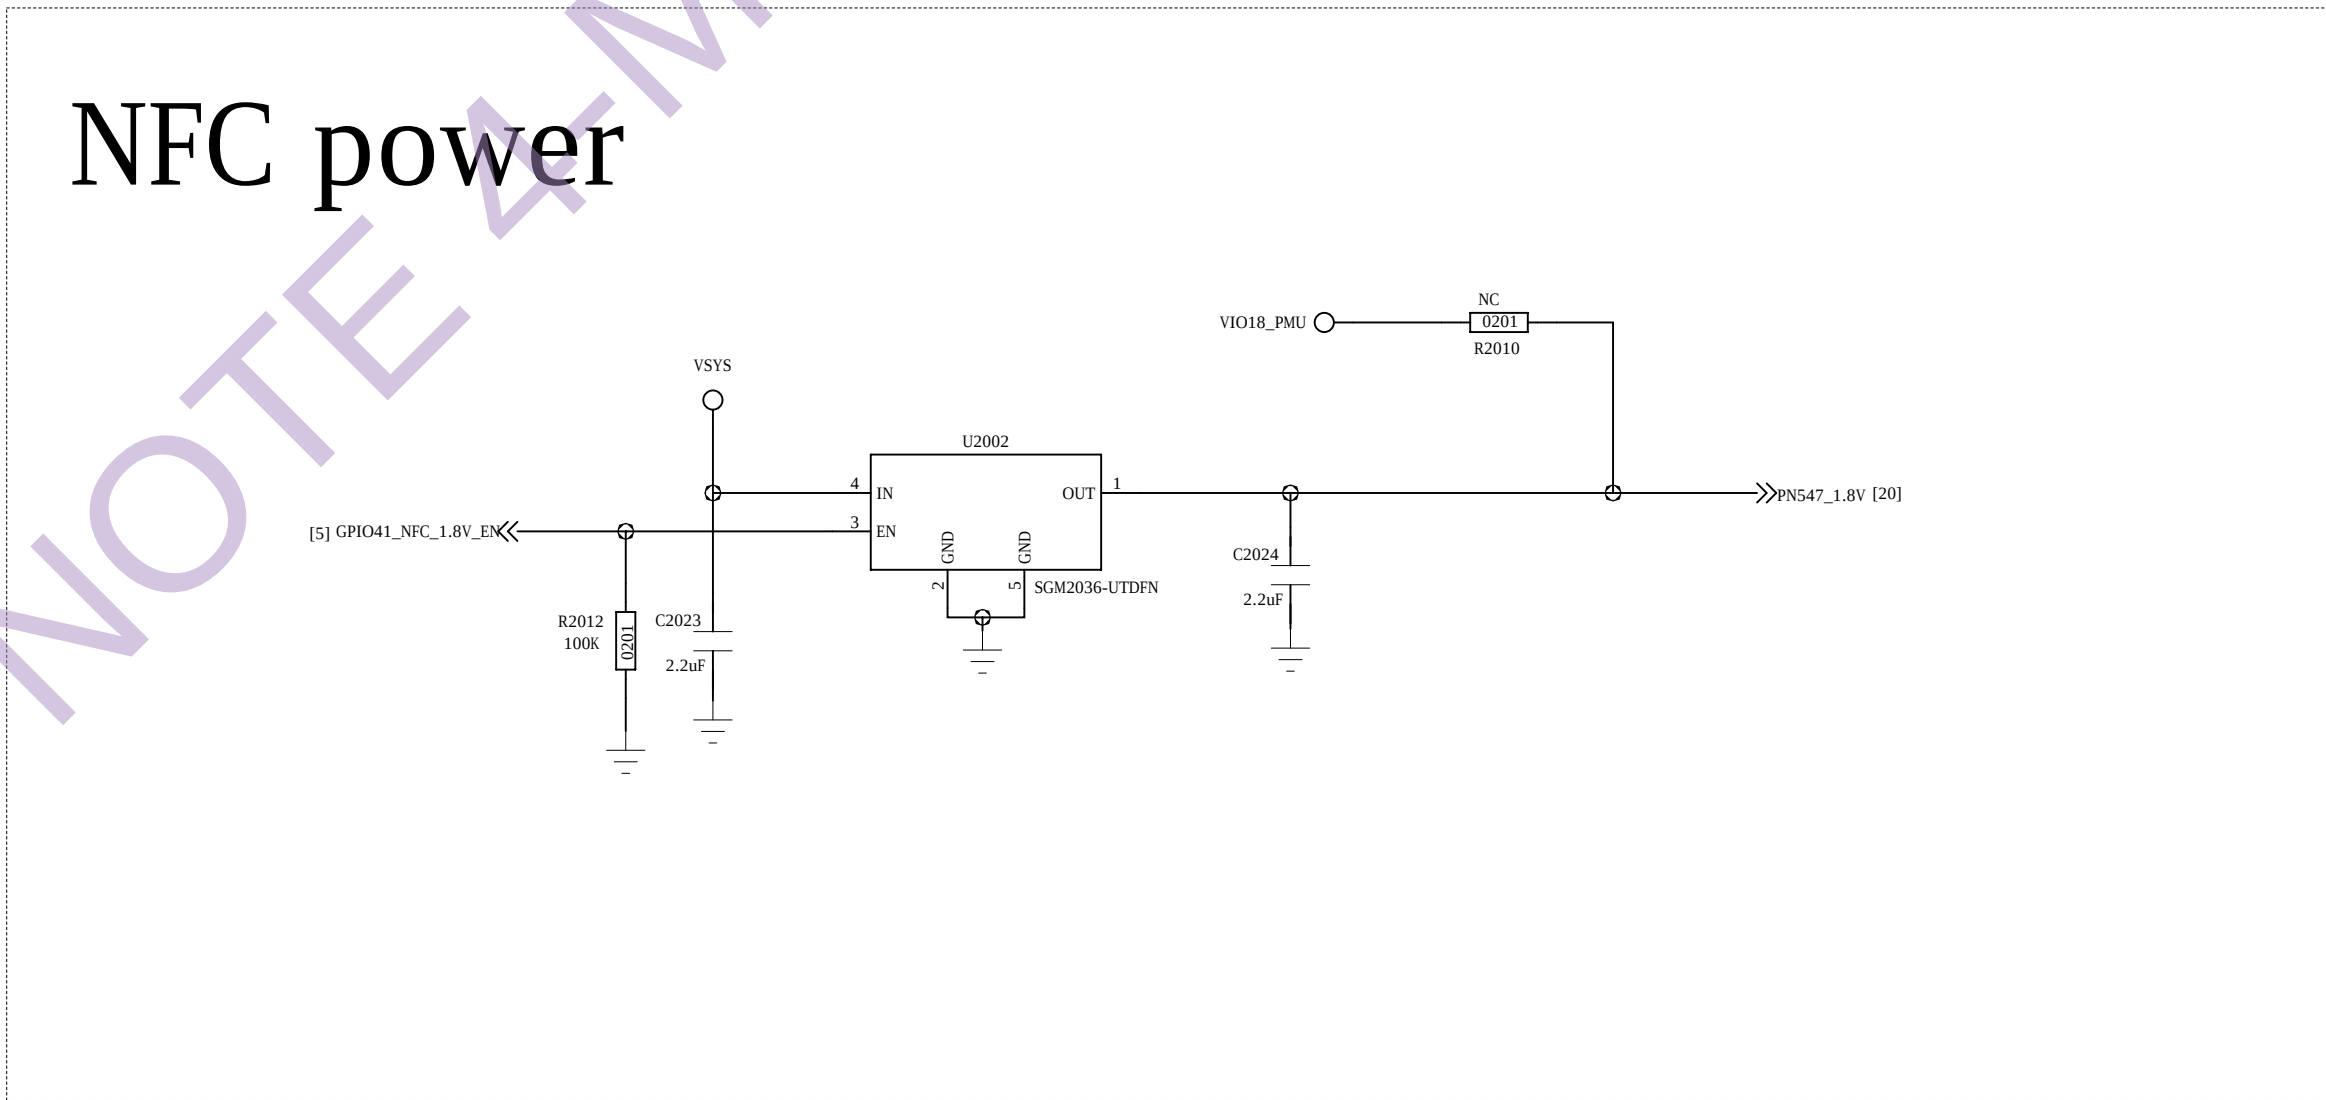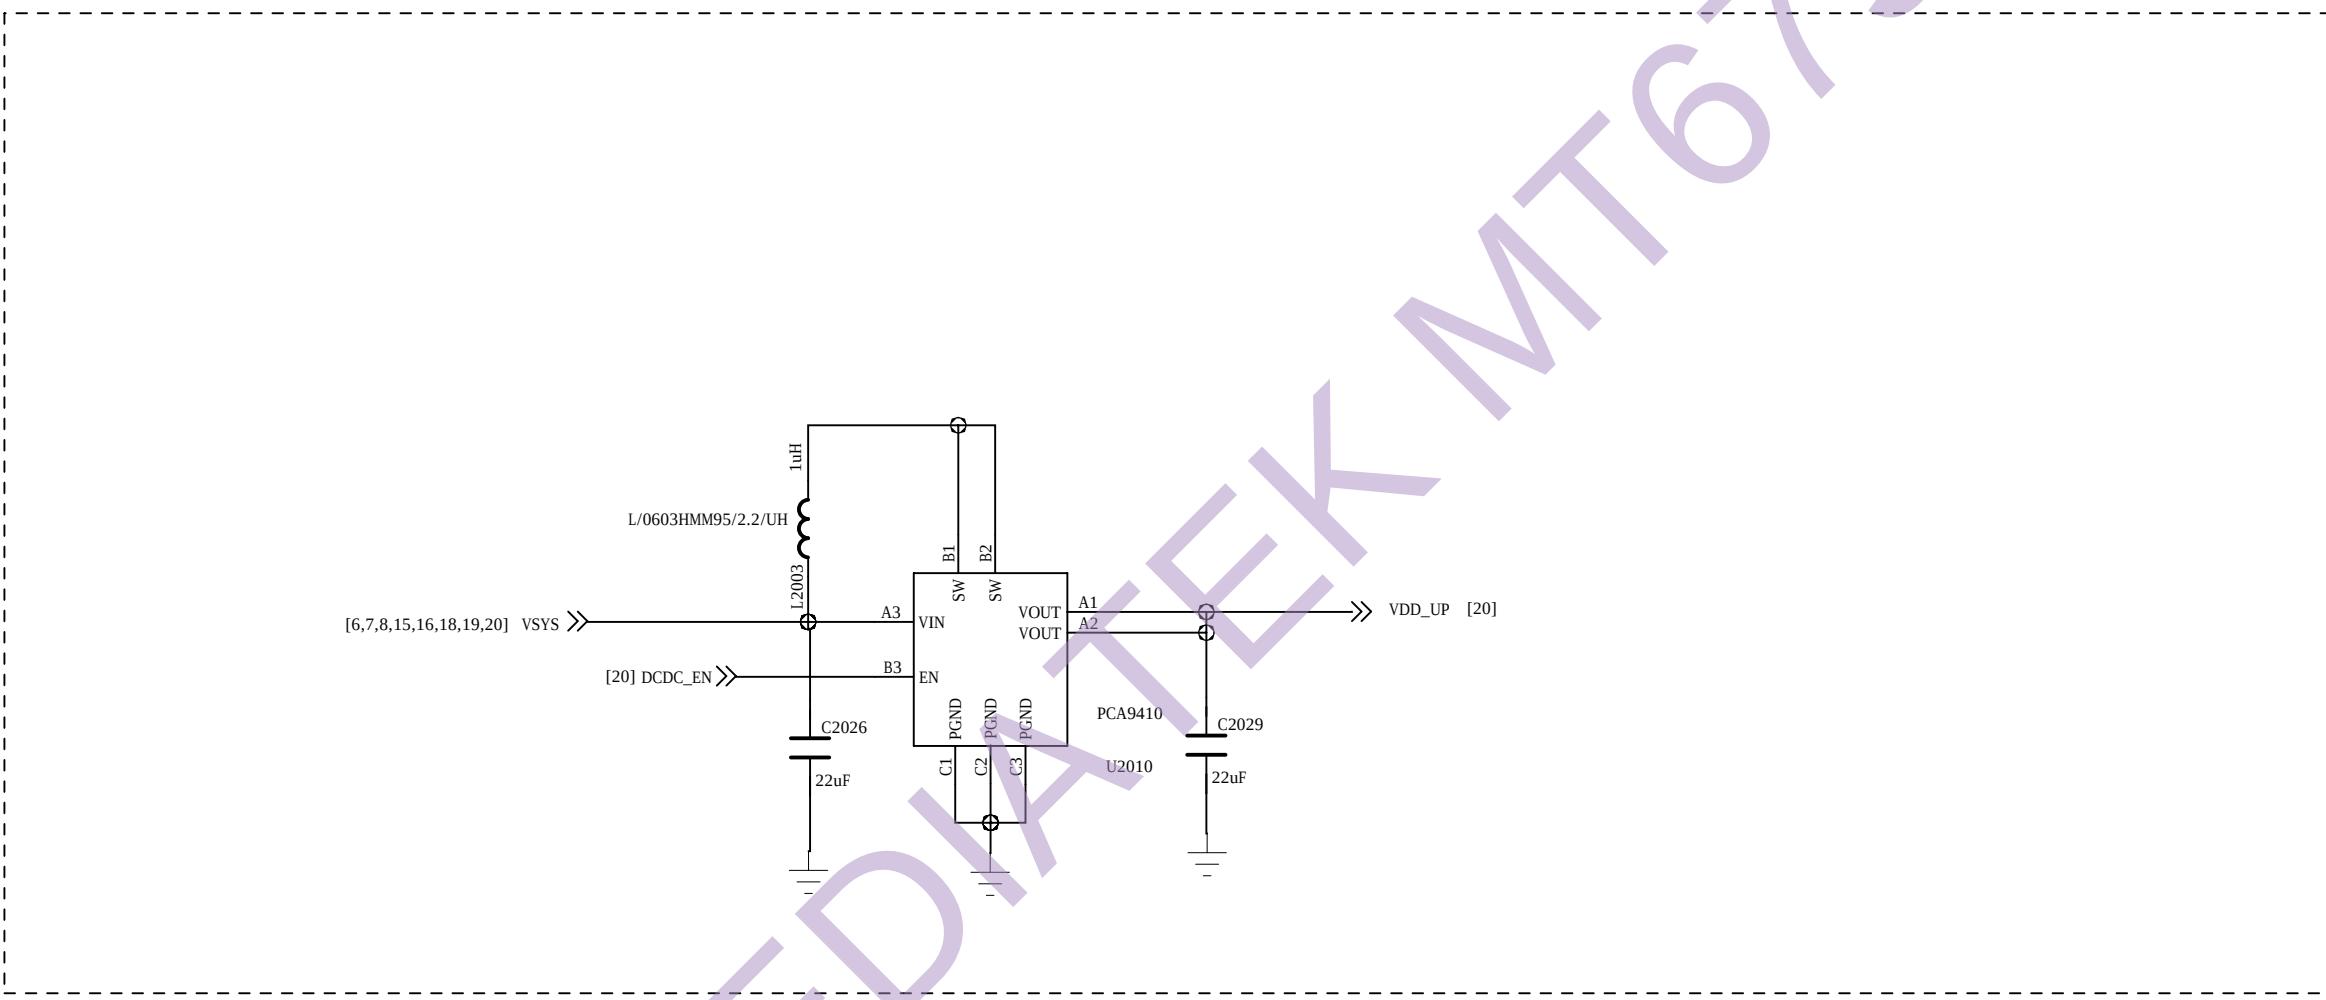

I2C_ADR1	I2C_ADR0	WRITE	READ
0	0	0X50	0X51
0	1	0X52	0X53
1	0	0X54	0X55
1	1	0X56	0X57

NFC

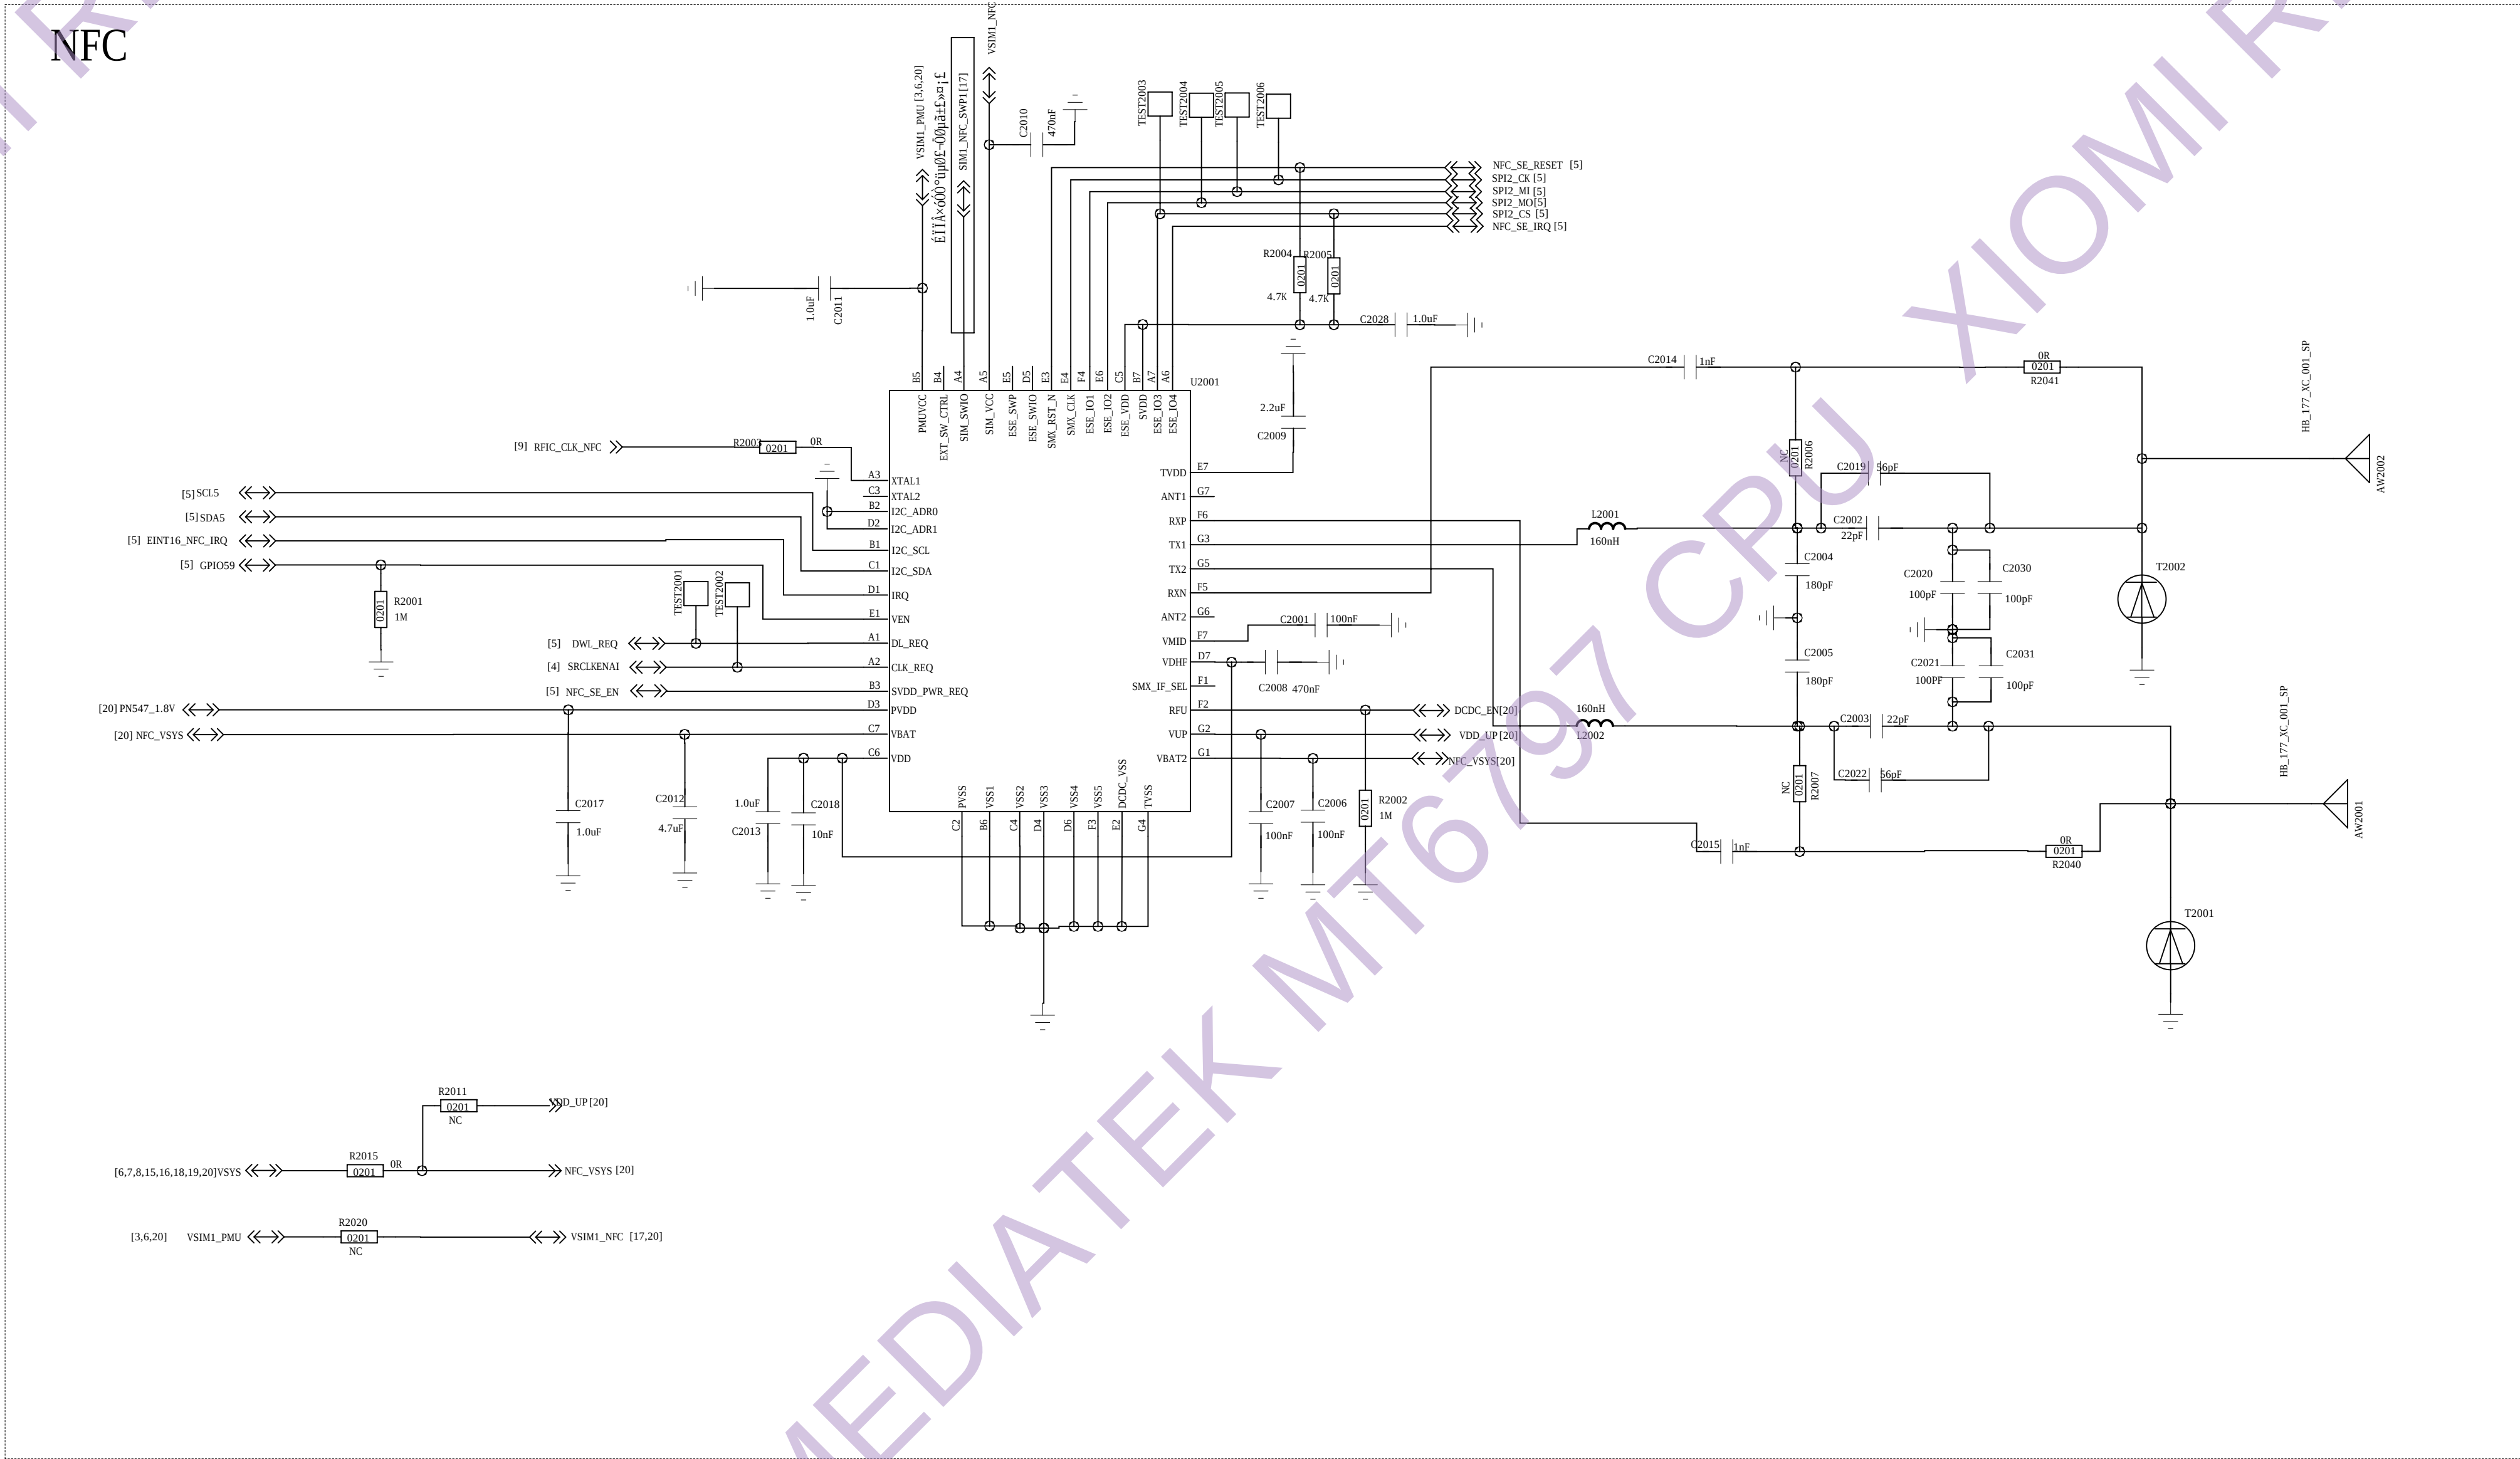

COMPANY			
LC			
TITLE			
CX880			
DRAWN: <Drawn By>	DATE: <Drawn Date>	CODE:	SIZE:
CHECKED: <Checked By>	DATE: <Checked Date>	DRAWING NO:	REV:
QUALITY CONTROL: <QC By>	DATE: <QC Date>	<Code> A0 <Drawing Number>Revision>	
RELEASED: <Release By>	DATE: <Release Date>	SCALE: <Scale>	
SHEET 20		20	