Quarterly operations review

Section 1: Scope, definitions and operating results

1.1 Scope and definitions

This report compares **Plant A** in Q2, Q3 and Q4 of FY2025. All quarters use the same production line, standard rate and measurement rules. Values are fictional but internally consistent.

Production efficiency = good units produced / (planned production hours x standard rate) x 100. The standard rate is **50 units per hour**. Planned hours include downtime. First-pass yield is a separate quality measure shown in Figure 1.

1.2 Operating results - Table 1

Metric	Q2	Q3	Q4
Planned production hours	500	500	500
Good units produced	18,000	19,500	21,000
Standard rate (units/hour)	50	50	50
Production efficiency	72%	78%	84%
Unplanned downtime (hours)	40	30	20
Maintenance spend (USD)	12,000	15,000	18,000

Table note: Good units exclude rejected units. Maintenance spend is reported in whole US dollars. Downtime is already included in planned hours; do not subtract it again when calculating efficiency.

Quality trend: visual evidence


Section 2: First-pass yield - Figure 1

2.1 First-pass yield chart

Figure 1 shows a quality metric, **not production efficiency**. Read the plotted labels to compare first-pass yield between Q2 and Q4. The complete chart is embedded as an image.

Figure 1. First-pass yield by quarter

Plant A | FY2025 | Units passing inspection without rework

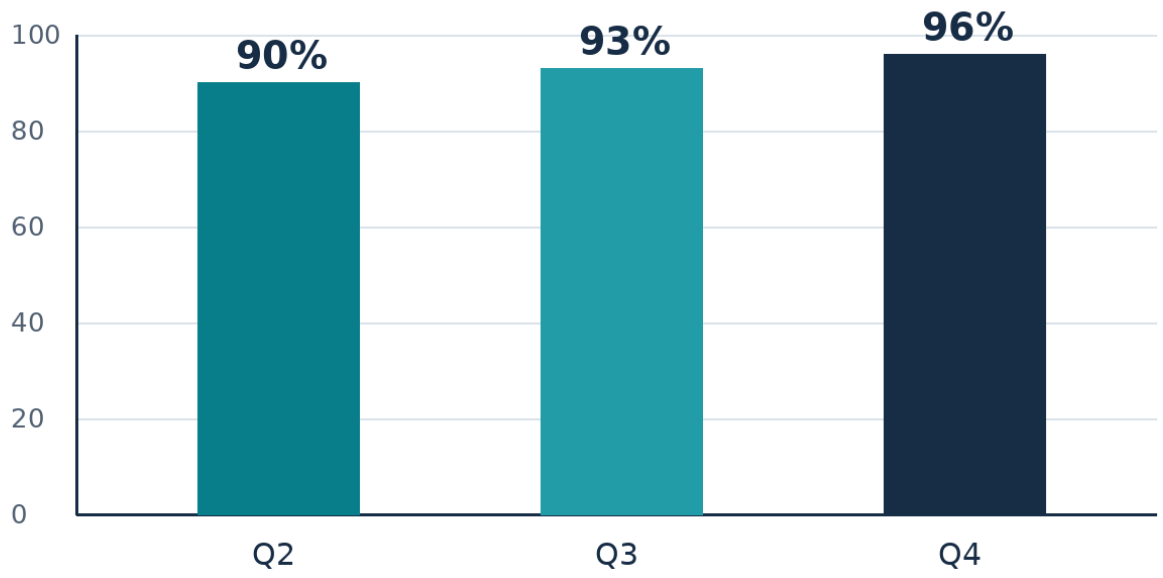

Yield = first-pass accepted units / all inspected units x 100

2.2 Interpretation rules

First-pass yield measures units accepted without rework as a share of all inspected units. A higher yield indicates fewer units need rework or rejection. Table 1 does not supply the inspected-unit totals, so the absolute number of reworked units cannot be calculated from this report.

For changes between two percentages, distinguish **percentage points** from **relative percent change**. Cite Figure 1 for yield values and Table 1 for production efficiency values.

Management assessment

Section 3: Attributed drivers and limitations

3.1 Management estimate of efficiency drivers

Management attributes the **12-percentage-point production efficiency increase from Q2 to Q4** to the following three improvements. Contributions are management estimates, not experimentally proven causal effects.

Preventive maintenance - estimated +6 percentage points

Scheduled inspections and replacement of worn bearings reduced interruptions. Unplanned downtime decreased from 40 hours in Q2 to 20 hours in Q4, consistent with the reported improvement.

Operator training - estimated +4 percentage points

Standard setup checklists and practical training reduced setup mistakes. No separate training-effect experiment was conducted.

Material consistency - estimated +2 percentage points

A tighter incoming-material specification reduced variation. Supplier-specific defect totals are not included in this report.

3.2 Cost and evidence limitations

Maintenance spend increased from USD 12,000 to USD 18,000. The report does not provide sales prices, labor costs, or energy costs. Therefore, net profit and maintenance return on investment cannot be established.

The driver estimates sum to the observed change, but this does not establish causation. Do not claim that higher maintenance spending alone caused the efficiency gain. Findings apply only to Plant A and the stated quarters.