

HITACHI
Inspire the Next




HITACHI products are available at:

The specifications in this catalogue are subject to changes without prior notice so that HITACHI may offer the latest innovations to its customers. HITACHI shall not be liable for any errors or omissions contained in this catalogue.

HELSE RAC 04-2014

HITACHI General Catalogue

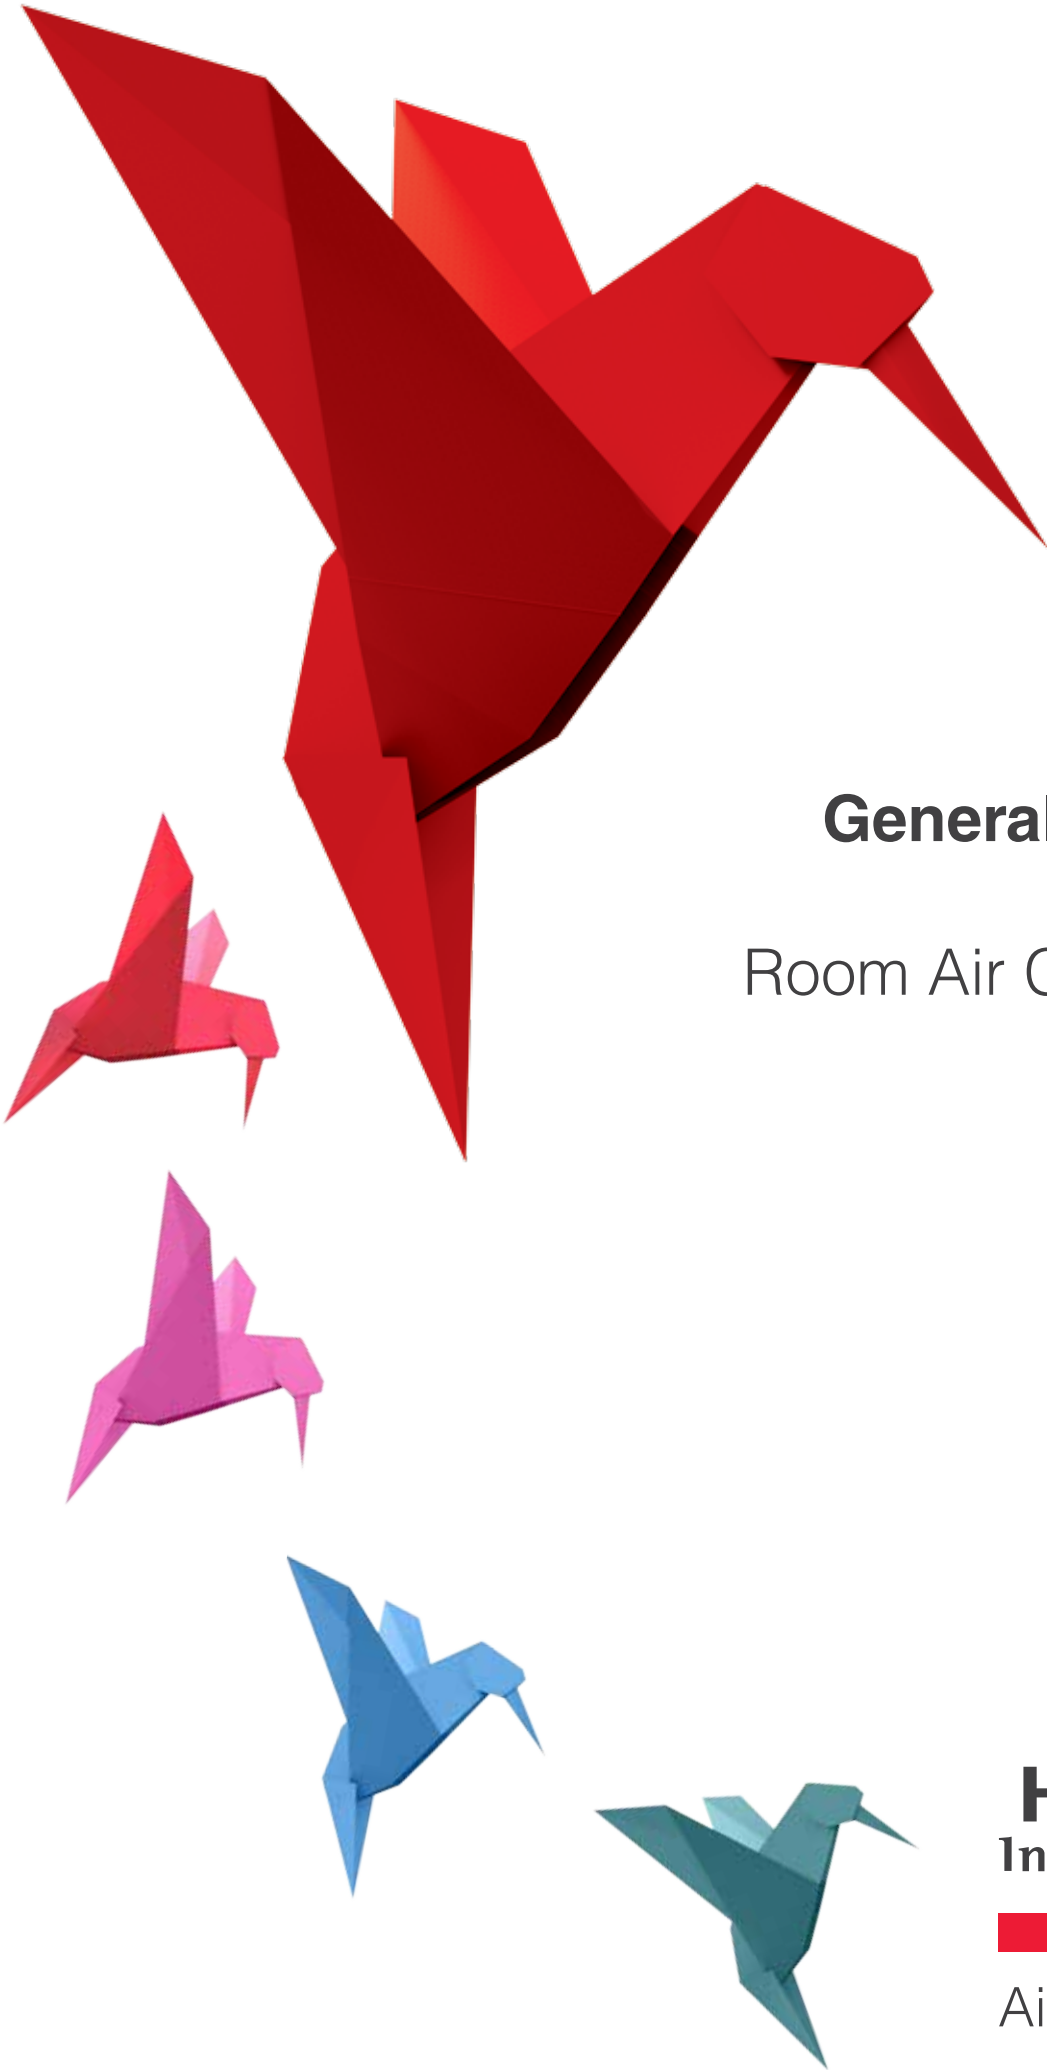

General Catalogue
Room Air Conditioning

HITACHI
Inspire the Next

Air Conditioning

Meet MIRAI

My name is MIRAI and I will be your guide in the world of HITACHI air conditioning.

The word MIRAI means FUTURE in Japanese and I represent HITACHI's ability to predict in advance customers' needs in air conditioning products and solutions.

HITACHI's work philosophy is founded exactly on this principle: every year we invest a portion of our corporate earnings in the research and development of new products in line with the market's exacting demands, yet respecting and safeguarding the environment.

With this spirit, our abilities, our ongoing commitment, we have been continuously growing for more than 100 years and we are not going to stop!

Confident in our solid past but with our eyes firmly set on the future...



This is HITACHI!

I am MIRAI!

Company Profile



HITACHI
Inspire the Next



Hitachi Air Conditioning Products Europe - HAPE Production facility - Barcelona, Spain

In 2012 HITACHI widened their activities by setting up HITACHI Air Conditioning Europe SAS.

HITACHI Air Conditioning Europe encompasses all Air Conditioning operations in the European market, including sales and production.

Air conditioning according to HITACHI means **more innovative ideas**, the most recent **technological developments** and, together with **engineering** and **quality control** processes, producing systems to improve life in a home and professional environment.

In producing its range of innovative products, HITACHI has a responsible and environmentally-friendly approach which imbues every activity within the process, from

the first design stage of a new product, to production, to installation and operation procedures, guaranteeing products 'Engineered for tomorrow'.

HITACHI is committed to supplying products of outstanding quality with the highest efficiency levels and the best cost-effectiveness. Achieving success with such ambitious goals on a global scale does not only involve committing considerable resources, but also implies a bold bet and huge commitment to the future.

Among the most prominent companies worldwide, with about 360,000 employees, HITACHI can build on their expertise and knowledge, in the awareness it has been successfully addressing customers' changing needs for more than a century. Our de-

sign and development skills are second to none and HITACHI is firmly ready to face the future with serenity and confidence. HITACHI – the name means “Rising Sun” in Japanese – is at the forefront in research and development, along a path led by substantial investments. About 4.2% of its worldwide 2010* \$112,2 billion turn-over has been invested in research and development programs. This allows HITACHI to boast a wide number of “world's first” products, such as the acclaimed and technologically advanced scroll compressors and semi-hermetic screw compressors. HITACHI compressors have revolutionised the air-conditioning world.

The design process starts in Japan's workshops and production units and is continuously developed via an exchange with the other units worldwide.

HITACHI Air Conditioning products are sought after worldwide, whenever there is a need for high-efficiency products with the best price-quality ratio and an extremely long life. The widest product range, matched to an adequate set of electronic controls, allows HITACHI to offer solutions for any application or technical specification.

The innovative HITACHI production facility and training centre set up in Barcelona, Spain (HAPE) is tailored to the European market. The technologies used afford significant savings in production costs, fast deliveries and prompt support in meeting customers' needs.

In addition to the technical support provided by HITACHI Air Conditioning Europe, the local units contribute with their abilities and know-how to supporting customers from design to after-sale service in starting up and controlling systems.

The after-sale service relies on a network of selected professionals and an extremely fast support in spare parts.

To meet your air conditioning and heating needs and to assure air quality in your en-



Hitachi Air Conditioning Systems Co., Ltd. - Production facility - Shimizu, Japan



Hitachi Air Conditioning Products (M) - HAPM Production Facility - Kuala Lumpur, Malaysia

vironment, consider HITACHI Air Conditioning Europe as your partner, able to guide you in all air conditioning choices and ‘Inspiring the Next ...’

EcoDesign (E.r.P.)

A Directive to address European environmental emission reduction goals

Europe has revisited the original EcoDesign Directive (Directive 2005/32/CE) and widened its field of application in order to achieve European 3 x 20 environmental goals (-20% energy consumption, -20% CO₂ emissions, +20% renewable energies) by 2020.

The initial scope of EcoDesign was E.u.P. (Energy using Products). However, the present scope of EcoDesign encompasses all products that are connected to the use of energy (e.g.: windows, paneling) and it has been more correctly named E.r.P. (Energy related Products).

What does EcoDesign mean?

EcoDesign means taking into consideration the environmental aspects of every product/service in question.

This approach consists in considering CO₂ emissions and energy consumption throughout the entire life of the product (from design to end of life, including transport).

ErP concerning conditioning and heating systems

The EcoDesign analysis highlights that the greatest environmental impact arises from the utilisation period of the products. For this reason, ErP sets minimum compulsory efficiency levels to enter the European market. At the same time, ErP requires the disclosure of technical data to users through a label which must show efficiency data and noise level, with the aim of assisting consumers in their choices.

ErP applies to every conditioning and heating system independently from the type (air/air, air/water, water/water, boilers...), capacity, utilisation (heating, conditioning, DHW) via a range of "Lots" and different time frames. The first Lot in force as of 1st January 2013 is "Lot 10". It covers all air conditioners (air/air), with capacity lower than 12kW, operating in conditioning and/or heating.

Fundamental aspects of Lot 10

- 3 fundamental aspects in terms of compliance are described in Directive 2010/30/UE No.626/2011 of 4 May 2011 and in Directive 2009/125/EC No.206/2012 of 6 March 2012.

- (a) Definition of the minimum efficiency level in heating and conditioning
- (b) Definition of the Sound Power level for internal and external unit at nominal conditions
- (c) Definition of the criteria for communication to the user by means of the label

- The application date is 1st January 2013.

However, levels (a) and (b) will be increased every year and labeling will be updated every 2 years.

- The efficiency level (a) refers to seasonal efficiency of the system, called SCOP (heating) and SEER (conditioning) for the average European climate. This efficiency coefficient is going to replace the previous COP and EER values.

Table of minimum SCOP/SEER values for compliance

Energy rating	SEER	Energy rating
A +++	SEER 8.50	SCOP $\leq$ 5.10
A ++	$6.10 \leq \text{SEER} \leq 8.50$	$4.60 \leq \text{SCOP} < 5.10$
A +	$5.60 \leq \text{SEER} \leq 6.10$	$4.00 \leq \text{SCOP} < 4.60$
A	$5.10 \leq \text{SEER} \leq 5.60$	$3.40 \leq \text{SCOP} < 4.00$
B	$4.60 \leq \text{SEER} \leq 5.10$	
C	$4.10 \leq \text{SEER} \leq 4.60$	
D	$3.60 \leq \text{SEER} \leq 4.10$	

2013

SEER: 3.60 (D)

SCOP: 3.40 (A)

2014

SEER: 4.30 (C) 6 ÷ 12kW

4.60 (B) < 6kW

SCOP: 3.80 (A)

Main differences between nominal COP and SCOP :

«**Nominal COP**» defines the efficiency of the system in one measuring point: +7°C outside, +20°C inside, compressor at nominal speed.


«**SCOP**» defines the system's seasonal efficiency, considering:

- 5 measuring points: -10°C, -7°C, +2°C, +7°C, +12°C outside, +20°C inside
- Different compressor speeds (full load and partial load). Ancillary consumptions (oil heater, thermostat off mode, off mode, standby...)
- Temperature conditions for an identified climate (obligatory average climate, optional hot climate and cold climate) and number of operating hours depending on outdoor temperatures

- Thermal load of the building (called Pdesign)

For these reasons, the SCOP (and SEER) give a more accurate estimate of the actual efficiency of a system throughout the entire time of utilisation.

Climate considered by ErP	Reference temperature "T design"
Average	- 10° C
Cold	- 22° C
Hot	+ 2° C

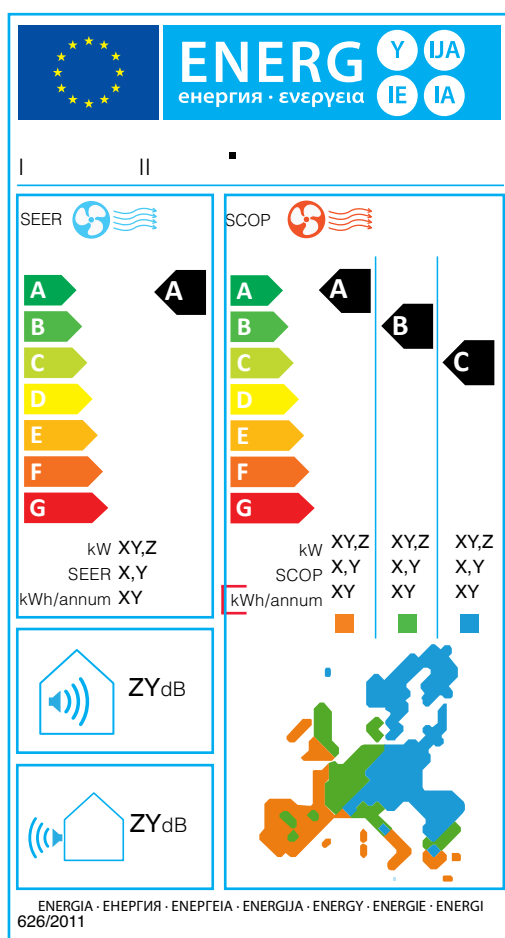

Sound power

of the internal and external unit at nominal capacity

Yearly Kwh

used in cooling and heating mode calculated under the Regulations

Note:

The manufacturer may choose to declare the data for all zones.

The average climate is the only obligatory one.

Pdesign = thermal load at the standard design temperature T design.

<http://erpactive.hitachiaircon.com>





Contents



RESIDENTIAL

8



Mono Split

16



Multi Split

38

HITACHI's Alarm Code App

74

Quality Certifications

75

Residential air conditioners



HITACHI is proud to introduce the new residential air conditioning range, resulting from continued investments in research and development at our laboratories and factories worldwide.

All our products feature low energy consumption, in order to reduce CO2 emissions and contribute to protecting the environment on a global scale. HITACHI air conditioners incorporate state-of-the-art energy saving technologies aligned with recent European directives, however, other important aspects such as design, user-friendliness, air quality, quiet operation, flexibility of installation and easy maintenance are not overlooked.

The PAM DC Inverter technology assures electrical consumption optimisation against output power, adjusting the cooling capacity in order to always adapt to the actual thermal load of the environment. The mono split range consists of indoor units suitable for various types of installation in a number of power levels (from 1.8kW to 7kW depending on the model). In the multi split range from 2 up to 6 indoor units may be connected, with overall cooling power from 3.6kW to 13.0kW.

HITACHI residential air conditioners have been designed to always assure our customers' comfort!

- High efficiency PAM DC Inverter control
- R410A ecological refrigerant
- Heat pump technology: summer and winter operation
- Excellent ratio between power output and energy efficiency
- Extremely quiet
- High heating efficiency even at negative temperatures (-15°C)
- Condensation control: cooling operation up to -10°C ambient
- Air filtering of the highest quality
- Ease of installation and maintenance
- Elegant design

Features and advantages 10



Mono 16

Wall Premium RAK-PSB	18
Wall Akebono RAK-PXB	20
Wall Performance RAK-PPA	22
Wall Performance RAK-PPB	24
Wall Eco Comfort RAK-PEB	26
Floor Cut Out RAF-PXA	28
Floor Performance RAF-RPA	30
Ductable BP RAD-RPA	32
Ductable MP RAD-PPA	34
4-Way Cassette RAI-RPA	36



Multi 38

Wall Cut Out RAK-QXA	40
Wall Performance RAK-QPA	41
Floor Cut Out RAF-QXA	42
Floor Performance RAF-RPA	43
4-Way Cassette RAI-RPA	44
Ductable BP RAD-RPA	45
Multi Outdoor Units	46
Multi Combinations	48
Residential range accessories	72



Features and advantages

The new infra-red remote controller has a variety of available features

The new infra-red remote controller, available for a large number of models in the residential range, includes a host of functions to suit your lifestyle and assure the utmost comfort in your home. Its neat and essential design inspired by minimal and elegant aesthetics perfectly matches our air conditioners.

All the information on your air conditioner's operation and condition are clearly laid out on the large LCD display and the pictograms on the function keys make programming easy.

A built-in sensor instantly measures your room temperature in any position.



The new infra-red remote controller is equipped with a 7-day timer to suit your utilisation needs.
Up to 6 on/off settings may be programmed

for each day of the week, from Monday to Sunday.
Furthermore, up to 2 programs may be stored on the remote controller, for instance


one valid in summer and the other in winter.
The table below provides a programming example.

	MON	TUE	WED	THUR	FRI	SAT	SUN
04:00	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C		
06:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C Switching on at the weekend	ON 20°C
08:00	OFF	OFF	OFF	OFF	OFF		
	Switching off during working hours						
10:00							ON 18°C
12:00							Decrease temperature during daytime
14:00							
16:00							
18:00							ON 20°C
20:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C		Increase temperature after sunset
	Switch on before getting home						
22:00	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C
	Decrease temperature when going to bed						
24:00	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	Switch off during the night						



Remote controller functions



	ECO MODE It allows you to keep electricity consumption in check while always assuring fully efficient operation.
	POWERFUL MODE The system works at maximum power in heating or cooling mode for 20 minutes in order to meet the demand for comfort in the shortest possible time. When the 20 minutes have elapsed the system automatically returns to the initial condition.
	LEAVE HOME When leaving home for a long period of time in winter, this function prevents the rooms from getting too cold (below 10°C). the duration of the LEAVE HOME function may be set for the desired length of time. When the set period has expired, the unit goes back to operating in the previously set mode.
	INFO Three different parameters may be displayed with the INFO button. 1. Room temperature: the thermistor fitted in the remote controller lets you view the room temperature on the display. 2. Electrical consumption display: the monthly electrical consumption (current & previous month) may be displayed. 3. Malfunctioning self-diagnosis: in the event of failure, the LCD remote controller displays the error code for easier maintenance.
	SILENT MODE With the silent mode the sound level of the indoor unit may be lowered with just one touch by changing the fan speed.
	CLEANING Thanks to this feature the indoor unit will always keep clean and mould growth may be prevented after cooling operation by means of the evaporator's drying action.
	SLEEP TIMER The countdown timer may be set up to 7 hours' duration. The ability to adjust temperature ($\pm 2^{\circ}\text{C}$) and lower fan speed assures comfortable sleep and considerable energy savings.



Features and advantages

DC Inverter



The ability to always be at the forefront in technological progress and development is embedded in the DNA of an industry leader such as HITACHI. As pioneers of the DC inverter technology applied to air conditioning, we have developed solutions so that the compressors and fans of our products are entirely driven by DC inverter technology.

Quick start

The variable speed inverter compressor enables the system to reach the desired room temperature rapidly. Once the desired room temperature has been achieved, the compressor rotation speed is reduced with up to 30% energy savings compared to traditional systems, without affecting comfort levels.

Enhanced efficiency

Including a DC Inverter controlled motor which delivers enhanced efficiency over conventional AC motor driven systems, with gains up to 10%.

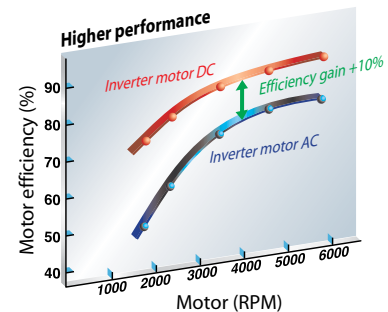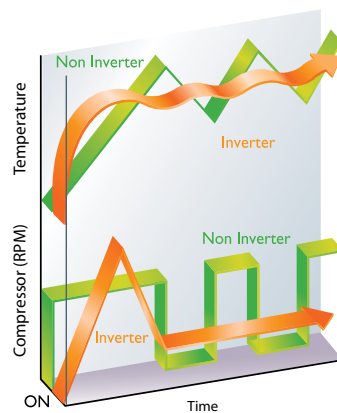

Quick start


Enhanced efficiency

PAM – Improves the inverter's efficiency curve


Hitachi's PAM (Power Active Module) control system mirrors the current pulse waveform to avoid distortion and achieves almost 100% power factor to enhance power efficiency. This cutting-edge device is applied in all Hitachi Mono/Multi products for your comfort, for our environment and energy saving. It assures the efficient use of input power and minimises losses inherent in the Inverter technology to less than 1%.



PAM logo



Conventional Inverter graph



PAM Inverter graph

Conventional inverter

PAM Inverter



Compressor technology

Digital DC Scroll Compressor

The motor uses a digital control to fully optimise efficiency of the PAM control.

- Loss during high-speed rotation is reduced thanks to digital motor control.
- Shaft wear during high speed rotation is lessened by three balancers mounted on the axis.
- Efficient operation with significantly reduced refrigerant leakage is assured by an automatic compression system, in which the slewing scroll is kept in close contact with the fixed scroll, thanks to special processing of the scroll surface.



DC Twin Rotary Compressor


Today many Mono and Multi air conditioning units are fitted with the new HITACHI Twin Rotary compressor, which features less vibration and higher efficiency than conventional rotary compressors.

- Two rotating cylinders assure well balanced rotation, unlike the traditional single-rotary type compressor, thus reducing any vibration noise.
- Compressor operation is remarkably improved by the independent operation of the cylinders, thus assuring greater efficiency and lower vibration.

Drawing of cylinder balancing



Conventional single rotary



New Twin Rotary

Comparison of vibration produced

Rotary 1

Twin Rotary 1/5

High Performance: Cooling up to -10°C outside and heating up to -15°C outside

Cold and hot performance is further improved compared to previous models. The units have been designed to operate in cooling mode up to outdoor temperature -10°C. PAM Inverter split systems maintain high efficiency even in heating mode up to outdoor temperature -15°C.



-10°C



-15°C

Cooling up to -10°C

Heating up to -15°C




Features and advantages

High air quality

The whole HITACHI residential range includes washable carbon dust filters as well as anti-bacteria air purifying active carbon filters.

These ensure that the micro dust, pollen particles and odours that collect on the surface of filters can be easily removed. The dust filters


can be washed and reused several times.

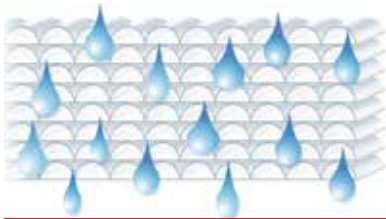

Breathable structure. Micro level dust is absorbed by static electricity.



Reusable after washing.

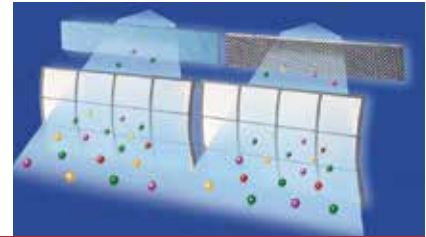

Active carbon purifying and antibacterial filters.

WASABI NANO TITANIUM air purifying filter

Antibacterial effect of WASABI

WASABI (the pungent tasting Japanese horseradish) is said to have antibacterial effects, and has therefore long been an important spice for preparing the raw fish (SUSHI and SASHIMI) typical of Japanese cuisine. The new filter is coated with WASABI particles to assure enhanced air purification and reduce fungi and bacteria.

NANO TITANIUM action


The filter consists of incredibly small TITANIUM particles (about 5 nano-metres in diameter) to catch and destroy bacteria. The high density of these particles prevents microbes from reaching the air and deactivates them with the utmost efficiency.

Tangible results of the new

WASABI NANO TITANIUM FILTER


- ▶ 99.99% reduction of bacteria after 24h observation (tested according to the JIS standard Z2801-2000)
- ▶ 95% reduction of dust mites after 6h
- ▶ 98% reduction of formaldehyde (cause of allergies) after just 1h
- ▶ 82% reduction of unpleasant odours after just 1h

The high concentration of Nano-Titanium Particles stops the dirt and odours that go through it, and eliminates them safely.

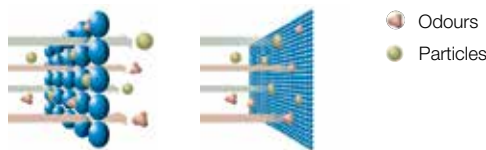

Anti-bacterial filter with Nano-Titanium Filter


Operating principle of the Nano-Titanium catalyst



Zinc traps odour molecules.



Titanium oxidation produces Oxygen Radicals from the oxygen in the Air.



The oxygen radicals eliminate the odour molecules that have been trapped by the Zinc.



The odours are eliminated and the Zinc is ready to eliminate more odour molecules again.

● Zn ● O₂ ● O₂ Radical ● Odour



Clean contact kit (SPX-WDC1/2/3/4)

A clean contact kit is available for all indoor units to enable/disable remote operation. Typical applications are the window contact (the unit is turned off when a window is opened in the room so as not to waste energy) or the electronic key (the unit is turned off when the badge electronic key is removed from its slot).




H-LINK Adapter (PSC-6RAD)

All indoor units can be connected with the H-Link adapter (PSC-6RAD) in a single bus according to a communication protocol developed by HITACHI.

This accessory makes residential units compatible with systems in the commercial, service industry and industrial range. The basic functions (On/Off, operation mode, set temperature, etc.) are programmable via the H-Link central controller.



H-LINK Adapter: PSC-6RAD for central control of residential air conditioners

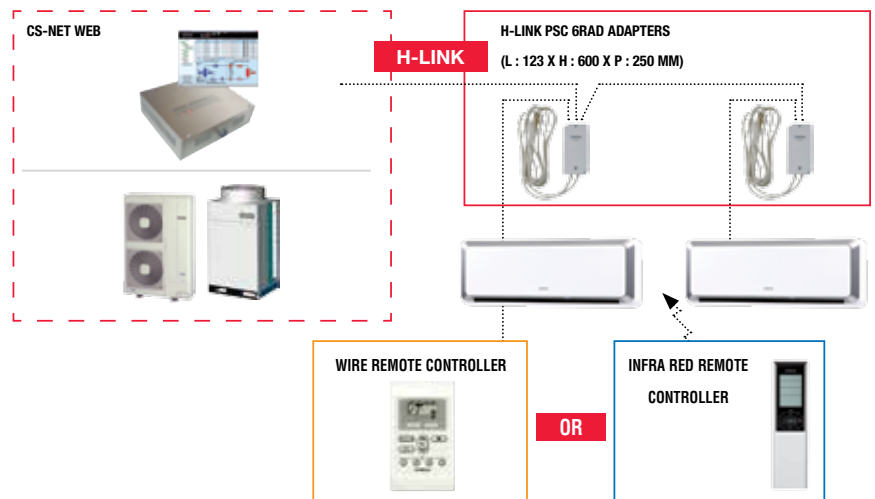

ID Switch

When two indoor units are installed close to each other in the same room, the infra-red frequency on the remote controller can be differentiated, to prevent mixing the signals controlling them.








Mono Conditioners

Guide to the MONO product codes


RAK 25PSA

INDOOR UNITS example:

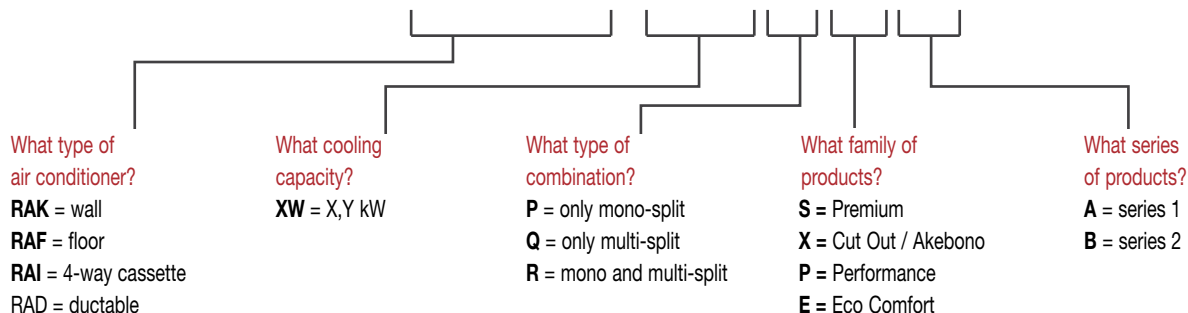

RAC 25WSA

OUTDOOR UNITS example:

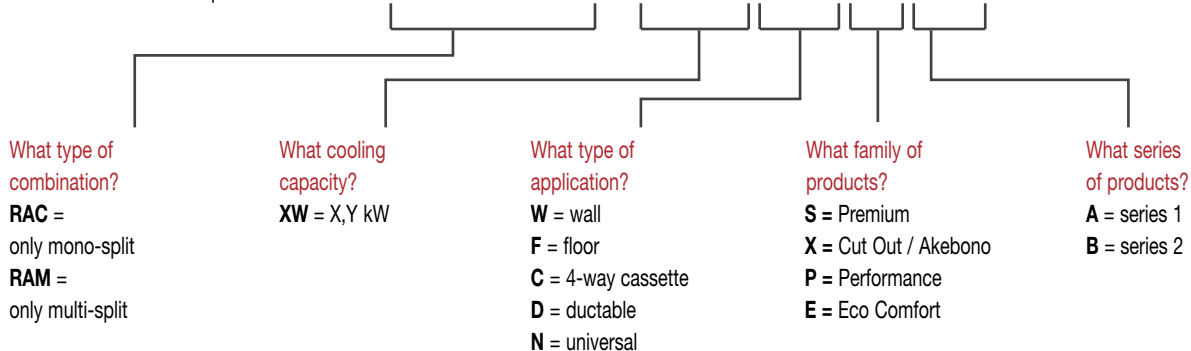

Mono DC Inverter PAM

		Power (kw)					
		1.8	2.5	3.5	5.0	6.0	7.0
Wall Premium	RAC-WSB / RAK-PSB	■	■	■			
Wall Akebono	RAC-WXB / RAK-PXB		■	■	■		
Wall Performance	RAC-WPA / RAK-PPA	■	■	■	■	■	■
Wall Performance	RAC-WPB / RAK-PPB	■	■	■	■		
Wall Eco Comfort	RAC-WEB / RAK-PEB	■	■	■	■		
Floor Cut Out	RAC-FXA / RAF-PXA		■	■	■		
Floor Performance	RAC-FPA / RAF-RPA		■	■	■		
Ductable Low Head Rise	RAC-NPA / RAD-RPA		■	■	■		
Ductable Medium Head Rise	RAC-DPA / RAD-PPA				■	■	■
4-Way Cassette	RAC-NPA / RAI-RPA		■	■	■		



Mono Split

Wall Premium RAK-PSB

PAM DC inverter Split Heat pump



RAK 18~25~35 PSB



■ EXCEPTIONAL SEASONAL EFFICIENCY

the air conditioner features exceptional seasonal efficiency levels both in cooling and heating mode

■ EXCEPTIONAL EFFICIENCY IN HEATING MODE:

thanks to its exceptional technical features, efficiency in heating mode is assured up to -20°C and thermal capacity remains unchanged with respect to the nominal value up to -15°C

■ ECO SENSOR:

the motion sensors built into the indoor unit assure a good balance between the desired comfort and energy savings

■ COMFORT AIRFLOW:

always thanks to the motion sensors, you may opt whether to aim the air flow away or at the user

■ ION MIST:

ionised water mist particles invisible to the human eye released into the room by an ionised mist device are able to significantly reduce the concentration of bacteria, fungi and pollen in the air

■ QUIET:

only 22dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed

■ STAINLESS CLEAN:

all inner surfaces of the air conditioner are constructed in stainless steel to assure the utmost cleanliness of the treated air, reducing the proliferation of pathogens. Thanks to this material, the air conditioner stays clean for a great many years

■ FILTER CLEAN:

just press a key on the remote controller, and a brush-fitted robotic arm located on the pre-filters automatically cleans the indoor unit

■ CLEAN FEATURE:

the evaporator is dried to prevent mould formation

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter)

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!

■ INFO KEY:

room temperature reading, power consumption display, alarm signals

■ VERTICAL / HORIZONTAL SWING:

the air flow is vertically and horizontally orientable from the remote controller thanks to the motorised flaps



SEASONAL EFFICIENCY
EXCEPTIONAL

EXCEPTIONAL EFFICIENCY
IN HEATING

ECO SENSOR

COMFORT AIRFLOW

ION MIST

QUIET

STAINLESS CLEAN

FILTER CLEAN

CLEAN FEATURE


7-DAY TIMER

LEAVE HOME

INFO KEY

VERTICAL / HORIZONTAL SWING

RAC 18~25~35 WSB

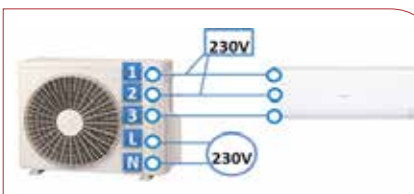



TECHNICAL SPECIFICATIONS

Outdoor unit	Unit of measurement	RAC-18WSB	RAC-25WSB	RAC-35WSB
Nominal cooling capacity (min-max)	kW	1.8 (0.5 - 2.8)	2.5 (0.5 - 3.4)	3.5 (0.5 - 4.1)
Nominal heating capacity (min-max)	kW	2.3(0.6 -4.8)	3.2(0.6 -5.8)	4.0(0.6 - 6.6)
Nominal cooling power input (min-max)	kW	0.300(0.070-0.880)	0.470(0.070-0.960)	0.805(0.070-1.350)
Nominal heating power input (min-max)	kW	0.375(0.065-1.620)	0.570(0.065-2.250)	0.790(0.065-2.450)
EER / COP		6.00/6.13	5.32/5.61	4.35/5.06
SEER		7.4	8.5	8.5
Cooling energy efficiency class		A++	A+++	A+++
Cooling annual consumption	kWh / year	85	103	144
P design	kW	1.8	2.5	3.5
SCOP (average climate)		4.6	4.7	4.7
Heating energy efficiency class		A++	A++	A++
Heating annual consumption	kWh / year	588	802	896
P design	kW	1.9	2.7	3.0
Cooling sound pressure level	dB(A)	46	48	49
Heating sound pressure level	dB(A)	46	48	49
Sound power	dB(A)	60	62	63
Air flow rate (cooling/heating)	m ³ / h	1860 / 1620	1860 / 1620	1920 / 1620
Dimensions (HxLxD)	mm	600x792x299	600x792x299	600x792x299
Weight	kg	40	40	40
Power supply	V / Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz
Starting current	A	2.32/2.42	3.37/3.53	4.67/4.88
Nominal current	A	0.30-3.83/0.28-7.04	0.30-4.17/0.28-9.78	0.30-5.87/0.28-10.65
Piping diameter (liq/gas)	inch.	1/4" / 1/2"	1/4" / 1/2"	1/4" / 1/2"
	mm	6.35-12.70	6.35-12.70	6.35-12.70
Min piping length	m	3	3	3
Piping length / max lift	m	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	1.350	1.350	1.350
Max pre-charge length / amount of additional refrigerant	m / g/m	20/-	20/-	20/-
Working range (cooling/heating)	°C	-10°C +43°C / -20°C+21°C	-10°C+43°C / -20°C+21°C	-10°C+43°C / -20°C+21°C
Refrigerant		R410A	R410A	R410A
Compressor	type	SCROLL	SCROLL	SCROLL

Indoor unit	Unit of measurement	RAK-18PSB	RAK-25PSB	RAK-35PSB
Cooling sound pressure (SL/L/M/H)	dB(A)	22/28/34/40	22/28/34/42	23/28/34/44
Heating sound pressure (SL/L/M/H)	dB(A)	22/30/34/41	22/30/34/42	23/30/34/44
Sound power	dB(A)	54	56	58
Cooling air flow rate (SL/L/M/H)	m ³ /h	260/300/420/ 470	260/320/420/510	270/320/420/520
Heating air flow rate (SL/L/M/H)	m ³ /h	260/300/420/540	260/370/520/600	270/410/520/610
Dehumidification	l/h	1.2	1.4	1.6
Dimensions (HxLxD)	mm	295x798x258	295x798x258	295x798x258
Weight	kg	12	12	12
Nominal current	A	0.30-3.83/0.28-7.04	0.30-4.17/0.28-9.78	0.30-5.87/0.28-10.65
Power supply	V	220-230V	220-230V	220-230V
Condensate drain diameter (ext)	mm	Ø 16	Ø 16	Ø 16
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR-5W1	RAR-5W1	RAR-5W1



Mono Split

Wall Akebono RAK-PXB

PAM DC inverter Split Heat pump



RAK 25~35~50PXB



- **ELEGANT DESIGN:**
a new range whose minimal design features are enhanced by high quality materials
- **ECO SENSOR:**
the motion sensor built into the indoor unit assures a good balance between the desired comfort and energy savings
- **WASABI NANO TITANIUM:**
the WASABI NANO TITANIUM air filter supplied guarantees the high quality of the air you breathe in your room
- **STAINLESS CLEAN:**
the inner surface of the air flow outlet and pre-filters are constructed in stainless steel to assure the utmost cleanliness of the treated air, reducing the proliferation of pathogens. Thanks to this material, the air conditioner stays clean for a great many years
- **EXCEPTIONAL SEASONAL EFFICIENCY:**
the air conditioner features exceptional seasonal efficiency levels both in cooling and in heating mode
- **HEATING AT LOW TEMPERATURES:**
guaranteed efficiency in heating mode up to -15°C
- **SUPER QUIET:**
only 20dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed
- **VERTICAL / HORIZONTAL SWING:**
the air flow is vertically and horizontally orientable from the remote controller thanks to the motorised flaps
- **7-DAY TIMER:**
6 on/off settings for every day of the week, two storable programs (summer/winter).
- **LEAVE HOME:**
the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!
- **INFO KEY:**
room temperature reading, power consumption display, alarm signals CLEAN FEATURE: the evaporator is dried to prevent mould formation

+21
-15



+43
-10



ELEGANT DESIGN

ECO SENSOR

WASABI NANO TITANIUM

STAINLESS CLEAN

SEASONAL EFFICIENCY
EXCEPTIONAL

HEATING AT LOW
TEMPERATURES

SUPER QUIET

VERTICAL / HORIZONTAL SWING


7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

RAC 25~35~50 WXB





TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC-25WXB	RAC-35WXB	RAC-50WXB
Nominal Cooling Capacity (min - max)	kW	2.50 (0.90 - 3.10)	3.50 (0.90- 4.00)	5.00 (1.90- 5.20)
Nominal Heating Capacity (min - max)	kW	3.20 (0.90- 4.20)	4.00 (0.90- 4.80)	5.80 (2.2- 7.00)
Nominal Cooling Power Input (min - max)	kW	0.545 (0.25 - 1.22)	0.910 (0.25 - 1.40)	1.560 (0.50 - 2.10)
Nominal Heating Power Input (min - max)	kW	0.700(0.25 - 1.20)	0.955(0.25 - 1.60)	1.560(0.50 - 2.70)
EER / COP		4.59/4.57	3.85/4.19	3.21/3.72
SEER		8.5	8.5	7.2
Cooling energy efficiency class		A+++	A+++	A++
Cooling annual consumption	kWh / year	103	144	243
P design	kW	2.5	3.5	5.0
SCOP (average climate)		4.7	4.7	4.5
Heating energy efficiency class		A++	A++	A+
Heating annual consumption	kWh / year	691	860	1309
P design	kW	2.3	2.9	4.2
Cooling sound pressure level	dB(A)	46	47	51
Heating sound pressure level	dB(A)	47	49	51
Sound power	dB(A)	60	61	65
Air flow rate (Cooling / Heating)	m ³ / h	1860 / 1620	1920 / 1620	2160 / 2160
Dimensions (H x L x D)	mm	548×750×288	548×750×288	736×800×350
Weight	kg	34	34	51
Power supply	V / Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz
Starting current	A	15	15	25
Nominal current	A	3.68/3.85	4.72/4.93	7.12/7.45
Piping diameter (Liq / Gas)	inch. mm	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"
Min piping length	m	3	3	3
Piping length / Max lift	m	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	1.080	1.170	1.350
Max pre-charge length / Amount of additional refrigerant	m / g / m	20/-	20/-	20/-
Working range (Cooling / Heating)	°C	-10°C—43°C/-15°C—21°C	-10°C—43°C/-15°C—21°C	-10°C—43°C/-15°C—21°C
Refrigerant		R410A	R410A	R410A
Compressor	type	ROTARY	ROTARY	ROTARY

INDOOR UNIT	Unit of measurement	RAK-25PXB	RAK-35PXB	RAK-50PXB
Cooling sound pressure (SL / L / M / H)	dB(A)	20/26/32/40	22/29/35/42	25/31/39/47
Heating sound pressure (SL / L / M / H)	dB(A)	20/27/33/40	22/30/35/42	25/31/39/48
Sound power	dB(A)	55	60	60
Cooling air flow rate (SL / L / M / H)	m ³ / h	300/330/510/560	320/340/430/580	350/400/580/720
Heating air flow rate (SL / L / M / H)	m ³ / h	290/370/560/610	310/360/480/630	350/420/620/800
Dehumidification	l/h	1.4	1.6	2.0
Dimensions (H x L x D)	mm	295 x 900 x 210	295 x 900 x 210	295 x 900 x 210
Weight	kg	11	11	11
Nominal current	A	1.09-5.30/1.09-5.22	1.09-6.09/1.09-6.96	2.17-9.13/2.17-11.74
Power supply	V	220-230V	220-230V	220-230V
Condensate drain diameter (ext)	mm	Ø16	Ø16	Ø16
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR-5E1	RAR-5E1	RAR-5E1



Mono Split

Wall Performance RAK-PPA

PAM DC inverter Split Heat pump



RAK 18~25~35~50PPA



RAK 60~70PPA




- **WIDE RANGE:**
available in 6 power levels, from 1.8kW to 7kW in cooling mode to adapt to a wide range of different needs
- **WASABI NANO TITANIUM:**
the WASABI NANO TITANIUM air filter supplied guarantees the high quality of the air you breathe in your room
- **VERTICAL / HORIZONTAL SWING:**
the air flow is vertically and horizontally orientable from the remote controller thanks to the motorised flaps (*for certain power levels)
- **EXCEPTIONAL SEASONAL EFFICIENCY:**
the air conditioner features exceptional seasonal efficiency levels both in cooling and heating mode
- **HEATING AT LOW TEMPERATURES:**
guaranteed efficiency in heating mode up to -15°C
- **SUPER QUIET:**
only 20dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed
- **7-DAY TIMER:**
6 on/off settings for every day of the week, two storable programs (summer/winter)
- **LEAVE HOME:**
the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!
- **INFO KEY:**
room temperature reading, power consumption display, alarm signals
- **CLEAN FEATURE:**
the evaporator is dried to prevent mould formation



- WIDE RANGE
- WASABI NANO TITANIUM
- VERTICAL / HORIZONTAL SWING
- EXCEPTIONAL SEASONAL EFFICIENCY
- HEATING AT LOW TEMPERATURES
- SUPER QUIET
- 7-DAY TIMER
- LEAVE HOME
- INFO KEY
- CLEAN FEATURE

RAC 18~25~35~50~60~70WPA

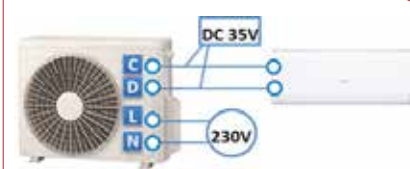

The appearance of the products may be slightly different from those pictured, depending on the selected power level.



TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC 18WPA	RAC 25WPA	RAC 35WPA	RAC 50WPA	RAC 60WPA	RAC 70WPA
Nominal cooling capacity (min-max)	kW	2.00 (0.90 - 2.50)	2.50 (1.60 - 3.10)	3.50 (0.90 - 4.00)	5.00 (0.90 - 5.20)	6.1 (0.90 - 6.50)	7.00 (1.50 - 8.00)
Nominal heating capacity (min-max)	kW	2.50 (0.90 - 3.20)	3.40 (1.70 - 4.00)	4.20 (0.90 - 5.00)	6.00 (0.90 - 8.10)	6.80 (0.90 - 8.50)	8.00 (1.50 - 9.20)
Nominal cooling power input (min-max)	kW	0.55 (0.25 - 1.01)	0.70 (0.25 - 1.29)	1.090 (0.25 - 1.46)	1.56 (1.55 - 2.20)	1.85 (1.55 - 2.30)	2.17 (2.00 - 2.82)
Nominal heating power input (min-max)	kW	0.58 (0.25 - 0.97)	0.88 (0.25 - 1.25)	1.10 (0.25 - 1.70)	1.66 (1.55 - 2.20)	1.88 (1.20 - 2.55)	2.20 (2.00 - 2.97)
EER / COP		3.64 / 4.31	3.57 / 3.86	3.21 / 3.82	3.21 / 3.61	3.30 / 3.62	3.23 / 3.64
SEER		5.8	5.8	5.85	6.1	6	6.8
Cooling energy efficiency class		A+	A+	A+	A++	A+	A++
Cooling annual consumption	kWh / year	121	151	210	290	350	360
P design	kW	2.0	2.5	3.5	5.0	6.1	7.0
SCOP (average climate)		4.16	4.19	4.26	4.3	4	4.4
Heating energy efficiency class		A+	A+	A+	A+	A+	A+
Heating annual consumption	kWh / year	609	823	1003	1520	1670	2060
P design	kW	1.8	2.5	3.0	4.7	4.7	6.4
Cooling sound pressure level	dB(A)	46	48	49	50	50	52
Heating sound pressure level	dB(A)	47	49	50	52	53	54
Sound power	dB(A)	60	62	63	65	66	67
Air flow rate (cooling/heating)	m ³ / h	1.860 / 1.620	1.860 / 1.620	1.920 / 1.620	- / -	- / -	- / -
Dimensions (AxLxP)	mm	505 x 700 x 258	505 x 700 x 258	548 x 750 x 288	650 x 850 x 298	650 x 850 x 298	800 x 850 x 298
Weight	kg	27	27	35	45	45	55
Power supply	V / Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	220 - 230V / 1Ph / 50Hz	220 - 230V / 1Ph / 50Hz	220 - 230V / 1Ph / 50Hz
Starting current	A	5.00	5.00	5.00	10.00	8.50	10.00
Nominal current	A	2.65 / 2.84	3.58 / 4.25	5.00 / 5.03	7.15 - 6.56 / 7.60 - 7.00	8.50 - 7.80 / 8.60 - 7.90	9.95 / 10.10
Piping diameter (liq/gas)	inch.	1/4 - 3/8	1/4 - 3/8	1/4 - 3/8	1/4" - 1/2"	1/4" - 1/2"	1/4" - 5/8"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 9.52	6.35 - 12.70	6.35 - 12.70	6.35 - 15.88
Min piping length	m	5	5	5	3	3	3
Piping length / max lift	m	20 / 10	20 / 10	20 / 10	20 / 10	30 / 20	30 / 20
Amount of pre-charged refrigerant	kg	0.82	0.82	1.00	1.65	1.65	1.85
Max pre-charge length / amount of additional refrigerant	m / g/m	20 / -	20 / -	20 / -		30 / -	30 / -
Working range (cooling/heating)	°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C
Refrigerant		R410A	R410A	R410A	R410A	R410A	R410A
Compressor	type	ROTARY	ROTARY	ROTARY	TWIN ROTARY	TWIN ROTARY	TWIN ROTARY

INDOOR UNIT	Unit of measurement	RAK 18PPA	RAK 25PPA	RAK 35PPA	RAK 50PPA	RAK 60PPA	RAK 70PPA
Cooling sound pressure (SL/L/M/H)	dB(A)	21 / 27 / 33 / 37	22 / 24 / 33 / 40	25 / 26 / 36 / 43	24 / 28 / 39 / 47	48 / 42 / 33 / 30	30 / 33 / 42 / 47
Heating sound pressure (SL/L/M/H)	dB(A)	19 / 28 / 34 / 38	20 / 21 / 34 / 41	26 / 27 / 36 / 44	27 / 31 / 39 / 47	33 / 34 / 42 / 49	30 / 33 / 42 / 47
Sound power	dB(A)	51	54	57	60	63	61
Cooling air flow rate (SL/L/M/H)	m ³ /h	312 / 350 / 400 / 440	333 / 370 / 430 / 510	333 / 400 / 485 / 600	246 / 330 / 540 / 750	480 / 540 / 690 / 930	510 / 630 / 870 / 1020
Heating air flow rate (SL/L/M/H)	m ³ /h	312 / 350 / 420 / 480	333 / 400 / 500 / 570	333 / 520 / 550 / 660	330 / 420 / 570 / 750	480 / 510 / 720 / 1050	510 / 630 / 870 / 1080
Dehumidification	l/h	1.20	1.40	1.60	2.80	2.80	4.50
Dimensions (HxLxD)	mm	280 x 780 x 218	280 x 780 x 218	280 x 780 x 218	300 x 790 x 230	295 x 1,030 x 207	333 x 1,150 x 245
Weight	kg	7.50	7.50	7.50	10.00	12.00	15.00
Nominal current	A	2.65 / 2.84	3.58 / 4.25	5.00 / 5.03	5.00 (0.90 - 5.20)	8.50 ~ 7.80 / 8.60 ~ 7.90	7.00 (1.50 - 8.00)
Power supply	V	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit	35V DC & 230V, 1Ph, 50Hz from outdoor unit	35V DC & 230V, 1Ph, 50Hz from outdoor unit
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red	Infra Red	Infra Red	Infra Red
	code	RAR - 5E2	RAR - 5E2	RAR - 5E2	RAR - 5E1	RAR - 5E2	RAR - 5E1



Mono Split

Wall Performance RAK-PPB

PAM DC inverter Split Heat pump

* available from May 2014



RAK 18~25PPB



RAK 35~50PPB



- **EXTREMELY HIGH SEASONAL EFFICIENCY:**
the air conditioner features exceptional seasonal efficiency levels both in cooling and heating mode
- **HEATING AT LOW TEMPERATURES:**
guaranteed efficiency in heating mode up to -15°C
- **WASABI NANO TITANIUM:**
the WASABI NANO TITANIUM air filter supplied guarantees the high quality of the air you breathe in your room
- **VERTICAL / HORIZONTAL SWING:**
the air flow is vertically and horizontally orientable from the remote controller thanks to the motorised flaps (*for certain power levels)
- **SUPER QUIET:**
only 20dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed

- **7-DAY TIMER:**
6 on/off settings for every day of the week, two storable programs (summer/winter)
- **LEAVE HOME:**
the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!
- **INFO KEY:**
room temperature reading, power consumption display, alarm signals
- **CLEAN FEATURE:**
the evaporator is dried to prevent mould formation



SEASONAL EFFICIENCY IS EXTREMELY HIGH

HEATING AT LOW TEMPERATURES

WASABI NANO TITANIUM

VERTICAL / HORIZONTAL SWING

SUPER QUIET


7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

RAC 18~25~35~50WPB



The appearance of the products may be slightly different from those pictured, depending on the selected power level.



TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAK-18WPB	RAK-25WPB	RAK-35WPB	RAK-50WPB
Nominal cooling capacity (min-max)	kW	2.00 (0.90 - 2.50)	2.50 (0.90 - 3.10)	3.50 (0.90- 4.00)	5.00 (1.90- 5.20)
Nominal heating capacity (min-max)	kW	2.50 (0.90 - 3.20)	3.40 (0.90- 4.40)	4.20 (0.90- 5.00)	6.00 (2.2- 7.30)
Nominal cooling power input (min-max)	kW	0.55(0.25 - 1.01)	0.70 (0.25 - 1.29)	1.090 (0.25 - 1.46)	1.560 (0.50 - 2.10)
Nominal heating power input (min-max)	kW	0.58(0.25 - 0.97)	0.88 (0.25 - 1.25)	1,100(0.25 - 1.70)	1,660(0.50 - 2.75)
EER / COP		3.64/4.31	3.57/3.86	3.21/3.82	3.21/3.61
SEER		7.0	7.6	7.2	7.2
Cooling energy efficiency class		A++	A++	A++	A++
Cooling annual consumption	kWh / year	100	115	170	243
P design	kW	2.0	2.5	3.5	5.0
SCOP (average climate)		4.3	4.4	4.6	4.4
Heating energy efficiency class		A+	A+	A++	A+
Heating annual consumption	kWh / year	591	786	928	1381
P design	kW	1.8	2.5	3.1	4.4
Cooling sound pressure level	dB(A)	46	48	49	51
Heating sound pressure level	dB(A)	47	49	50	51
Sound power	dB(A)	60	62	63	65
Air flow rate (cooling/heating)	m ³ / h	1860 / 1620	1860 / 1620	1920 / 1620	2160 / 2160
Dimensions (HxLxD)	mm	530x660 x278	530x660 x278	548x750x288	600x792x299
Weight	kg	27.5	27.5	34	40
Power supply	V / Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz
Starting current	A	3.34/3.49	4.36/4.56	5.27/5.51	7.59/7.93
Nominal current	A	1.09-4.39/1.09-4.22	1.09-5.61/1.09/5.43	1.09-6.35/1.09/7.39	2.17/-9.13/2.17-11.96
Piping diameter (liq/gas)	inch.	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"
	mm				
Min piping length	m	3	3	3	3
Piping length / max lift	m	20 / 10	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	0.950	0.950	1.050	1.250
Max pre-charge length / amount of additional refrigerant	m / g/m	20/-	20/-	20/-	20/-
Working range (cooling/heating)	°C	-10°C—43°C/-15°C—21°C	-10°C—43°C/-15°C—21°C	-10°C—43°C/-15°C—21°C	-10°C—43°C/-15°C—21°C
Refrigerant		R410A	R410A	R410A	R410A
Compressor	type	ROTARY	ROTARY	ROTARY	ROTARY

INDOOR UNIT	Unit of measurement	RAK-18PPB	RAK-25PPB	RAK-35PPB	RAK-50PPB
Cooling sound pressure (SL/L/M/H)	dB(A)	21/24 / 33 / 37	22/24 / 33 /40	25/26/36/43	25/28/39/46
Heating sound pressure (SL/L/M/H)	dB(A)	19/22 / 33 / 38	20/23 / 34 / 41	26/27/36/44	27/31/39/46
Sound power	dB(A)	51	54	57	60
Cooling air flow rate (SL/L/M/H)	m ³ /h	312 / 350 / 400 / 440	333 / 370 / 430 / 510	353 /420 / 485 / 680	353/410/540/750
Heating air flow rate (SL/L/M/H)	m ³ /h	312 / 350 / 420 / 480	333 / 400 / 500/ 570	363 / 480 / 570/ 780	380/500/610/820
Dehumidification	l/h	1.2	1.4	1.6	2.0
Dimensions (HxLxD)	mm	280 x 780 x 218	280 x 780 x 218	295 x 900 x 230	295 x 900 x 230
Weight	kg	7.5	7.5	10	10
Nominal current	A	1.09-4.39/1.09-4.22	1.09-5.61/1.09/5.43	1.09-6.35/1.09/7.39	2.17/-9.13/2.17-11.96
Power supply	V	220-230V	220-230V	220-230V	220-230V
Condensate drain diameter (ext)	mm	Ø16	Ø16	Ø16	Ø16
Standard remote controller	type	Infra Red	Infra Red	Infra Red	Infra Red
	code	RAR-5E2	RAR-5E2	RAR-5E1	RAR-5E1



Mono Split

Wall Eco Comfort RAK-PEB

PAM DC inverter Split Heat pump

* available from April 2014



RAK 18~25~35~50PEB



+21
-15

+43
-10

SEASONAL EFFICIENCY

SUPER QUIET

12H TIMER

HEATING AT LOW TEMPERATURES

LEAVE HOME

ECO AND POWERFUL FUNCTIONS

■ SEASONAL EFFICIENCY:

the air conditioner features good seasonal efficiency levels both in cooling and heating mode

■ SUPER QUIET:

only 20dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed

■ 12H TIMER:

Available on the remote controller for convenient daily programming

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C


■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business

■ ECO AND POWERFUL FUNCTIONS:

you may opt whether to operate the air conditioner at very low consumption or at maximum power to reach the desired temperature quickly

RAC 18~25~35~50 WEB

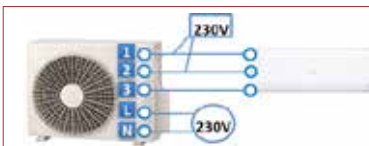



TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC-18WEB	RAC-25WEB	RAC-35WEB	RAC-50WEB
Nominal cooling capacity (min-max)	kW	2.00 (0.90 - 2.50)	2.50 (0.90 - 3.10)	3.50 (0.90- 4.00)	5.00 (1.90- 5.20)
Nominal heating capacity (min-max)	kW	2.50 (0.90 - 3.20)	3.40 (0.90- 4.40)	4.20 (0.90- 5.00)	6.00 (2.2- 7.30)
Nominal cooling power input (min-max)	kW	0.58 (0.25- 1.01)	0.70 (0.25 - 1.29)	1.090 (0.25 - 1.46)	1.560 (0.50 - 2.10)
Nominal heating power input (min-max)	kW	0.62 (0.25-0.97)	0.88 (0.25 - 1.25)	1,100 (0.25 - 1.70)	1,660 (0.50 - 2.75)
EER / COP		3.45/4.03	3.57/3.86	3.21/3.82	3.21/3.61
SEER		5.8	5.8	5.9	5.9
Cooling energy efficiency class		A+	A+	A+	A+
Cooling annual consumption	kWh / year	121	151	209	298
P design	kW	2.0	2.5	3.5	5.0
SCOP (average climate)		3.8	3.8	3.8	3.8
Heating energy efficiency class		A	A	A	A
Heating annual consumption	kWh / year	668	909	1124	1601
P design	kW	1.8	2.5	3.1	4.4
Cooling sound pressure level	dB(A)	46	48	49	51
Heating sound pressure level	dB(A)	47	49	50	51
Sound power	dB(A)	60	62	63	65
Air flow rate (cooling/heating)	m ³ / h	1860 / 1620	1860 / 1620	1860 / 1620	2160 / 2160
Dimensions (HxLxD)	mm	530x660 x278	530x660 x278	530x660 x278	600x792x299
Weight	kg	27.5	27.5	27.5	40
Power supply	V / Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz
Starting current	A	3.37/3.52	4.44/4.65	5.39/5.63	7.23/7.56
Nominal current	A	1.09-4.39/1.09-4.22	1.09-5.61/1.09-5.43	1.09-6.35/1.09-7.39	2.17-9.13/2.17-11.96
Piping diameter (liq/gas)	inch.	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"
	mm				
Min piping length	m	3	3	3	3
Piping length / max lift	m	20 / 10	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	0.950	0.950	0.950	1.250
Max pre-charge length / amount of additional refrigerant	m / g/m	20/-	20/-	20/-	20/-
Working range (cooling/heating)	°C	-10°C—43°C/- 15°C—21°C	-10°C—43°C/- 15°C—21°C	-10°C—43°C/- 15°C—21°C	-10°C—43°C/- 15°C—21°C
Refrigerant		R410A	R410A	R410A	R410A
Compressor	type	ROTARY	ROTARY	ROTARY	ROTARY

INDOOR UNIT	Unit of measurement	RAK-18PEB	RAK-25PEB	RAK-35PEB	RAK-50PEB
Cooling sound pressure (SL/L/M/H)	dB(A)	21/24 / 33 / 37	22/24 / 33 / 40	25/26/36/43	28 / 30 / 40 / 46
Heating sound pressure (SL/L/M/H)	dB(A)	19/22 / 33 / 38	20/23 / 34 / 41	26/27/36/44	25 / 30/ 39 / 47
Sound power	dB(A)	51	54	57	60
Cooling air flow rate (SL/L/M/H)	m ³ /h	312 / 350 / 400 / 440	333 / 370 / 430 / 510	333 / 400 / 485 / 600	333 / 450 / 600 / 700
Heating air flow rate (SL/L/M/H)	m ³ /h	312 / 350 / 420 / 480	333 / 400 / 500 / 570	333 / 520 / 550 / 660	433 / 510 / 650 / 770
Dehumidification	l/h	1.2	1.4	1.6	2.0
Dimensions (HxLxD)	mm	280 x 780 x 218	280 x 780 x 218	280 x 780 x 218	280 x 780 x 218
Weight	kg	7.5	7.5	7.5	8
Nominal current	A	1.09-4.39/1.09-4.22	1.09-5.61/1.09-5.43	1.09-6.35/1.09-7.39	2.17-9.13/2.17-11.96
Power supply	V	220-230V	220-230V	220-230V	220-230V
Condensate drain diameter (ext)	mm	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"
Standard remote controller	type	Infra Red	Infra Red	Infra Red	Infra Red
	code	RAR-5F1	RAR-5F1	RAR-5F1	RAR-5F1



Mono Split

Floor Cut Out RAF-PXA

PAM DC inverter Split Heat pump



RAF 25~35~50 PXA



- **ELEGANT DESIGN:**
designed to combine comfort and functionality with refined and streamlined aesthetics, it can also be installed suspended above the floor without the white stand
- **EXTENDED AIR FLOW**
The air flow power can be increased to reach the furthest corners of the room
- **NANO TITANIUM:**
the NANO TITANIUM air filter supplied guarantees high quality of the air you breathe in your room
- **EXTREMELY HIGH SEASONAL EFFICIENCY:**
the air conditioner features exceptional seasonal efficiency levels both in cooling and heating mode
- **HEATING AT LOW TEMPERATURES:**
guaranteed efficiency in heating mode up to -15°C
- **SUPER QUIET:**

only 20dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed

- **7-DAY TIMER:**
6 on/off settings for every day of the week, two storable programs (summer/winter).
- **LEAVE HOME:**
the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!
- **INFO KEY:**
room temperature reading, power consumption display, alarm signals
- **CLEAN FEATURE:**
the evaporator is dried to prevent mould formation

+21
-15



+43
-10



ELEGANT DESIGN

EXTENDED AIR FLOW

NANO TITANIUM

SEASONAL EFFICIENCY
IS EXTREMELY HIGH

HEATING AT LOW
TEMPERATURES

SUPER QUIET

7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

RAC 25~35~50 FXA





TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC-25FXA	RAC-35FXA	RAC-50FXA
Nominal Cooling Capacity (min - max)	kW	2.50 (0.90 - 3.10)	3.50 (0.90 - 4.00)	5.00 (0.90 - 5.20)
Nominal Heating Capacity (min - max)	kW	3.40 (0.90 - 4.40)	4.50 (0.90 - 5.00)	6.50 (0.9 - 8.1)
Nominal Cooling Power Input (min - max)	kW	0.58 (1.55 - 1.16)	1.020 (0.155 - 1.380)	1.560 (0.155 - 1.950)
Nominal Heating Power Input (min - max)	kW	0.790 (0.115 - 1.17)	1.220 (0.115 - 1.350)	1.780 (0.155 - 2.100)
EER / COP		4.31 / 4.30	3.43 / 3.69	3.21 / 3.65
SEER		6.38	6.39	5.97
Cooling energy efficiency class		A++	A++	A+
Cooling annual consumption	kWh / year	140	196	299
P design	kW	2.5	3.5	5.0
SCOP (average climate)		4.24	4.14	4.15
Heating energy efficiency class		A+	A+	A+
Heating annual consumption	kWh / year	824	1120	1614
P design	kW	2.5	3.3	4.7
Cooling sound pressure level	dB(A)	45	46	50
Heating sound pressure level	dB(A)	47	48	52
Sound power	dB(A)	62	63	65
Air flow rate (Cooling / Heating)	m ³ / h	1.860 / 1.620	1.920 / 1.620	1.950 / 1.750
Dimensions (H x L x D)	mm	590 x 750 x 215	590 x 750 x 215	600 x 792 x 299
Weight	kg	35	35	42
Power supply	V / Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz
Starting current	A	2.66 - 2.55 / 3.63 - 3.47	4.68 - 4.48 / 5.60 - 5.36	7.16 - 6.85 / 8.17 - 7.82
Nominal current	A			
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Min piping length	m	5	5	5
Piping length / Max lift	m	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	0.87	0.87	1.45
Max pre-charge length / Amount of additional refrigerant	m / g / m	20 / -	20 / -	30 / -
Working range (Cooling / Heating)	°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C
Refrigerant		R410A	R410A	R410A
Compressor	type	SCROLL	SCROLL	SCROLL

INDOOR UNIT	Unit of measurement	RAF-25PXA	RAF-35PXA	RAF-50PXA
Cooling sound pressure (SL / L / M / H)	dB(A)	20 / 26 / 31 / 38	20 / 26 / 31 / 39	22 / 29 / 36 / 43
Heating sound pressure (SL / L / M / H)	dB(A)	20 / 26 / 31 / 38	20 / 26 / 31 / 39	22 / 29 / 36 / 44
Sound power	dB(A)	55	56	59
Cooling air flow rate (SL / L / M / H)	m ³ / h	270 / 390 / 510 / 630	270 / 390 / 510 / 630	300 / 450 / 540 / 720
Heating air flow rate (SL / L / M / H)	m ³ / h	300 / 420 / 540 / 660	300 / 420 / 540 / 660	330 / 480 / 570 / 750
Dehumidification	l / h	1.40	1.90	2.80
Dimensions (H x L x D)	mm	590 x 750 x 215	590 x 750 x 215	590 x 750 x 215
Weight	kg	15	15	15
Nominal current	A	2.70 (0.70 - 5.30)	4.70 (0.70 - 5.60)	7.20 (0.70 - 8.90)
Power supply	V	35V DC from outdoor unit	35V DC from outdoor unit	35V DC from outdoor unit
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR - 5E4	RAR - 5E4	RAR - 5E4



Mono Split

Floor Performance RAF-RPA

PAM DC inverter Split Heat pump



RAF 25~35~50 RPA



- **NANO TITANIUM:**
the NANO TITANIUM air filter supplied guarantees high quality of the air you breathe in your room
- **EXCEPTIONAL SEASONAL EFFICIENCY:**
the air conditioner features exceptional seasonal efficiency levels both in cooling and heating mode.
- **HEATING AT LOW TEMPERATURES:**
guaranteed efficiency in heating mode up to -15°C
- **QUIET:**
only 23dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed
- **7-DAY TIMER:**
6 on/off settings for every day of the week, two

storable programs (summer/winter).


- **LEAVE HOME:**
the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!
- **INFO KEY:**
room temperature reading, power consumption display, alarm signals
- **CLEAN FEATURE:**
the evaporator is dried to prevent mould formation

+21
-15

+43
-10

- NANO TITANIUM
- EXCEPTIONAL SEASONAL EFFICIENCY
- HEATING AT LOW TEMPERATURES
- QUIET
- 7-DAY TIMER
- LEAVE HOME
- INFO KEY
- CLEAN FEATURE

RAC 25~35~50 FPA

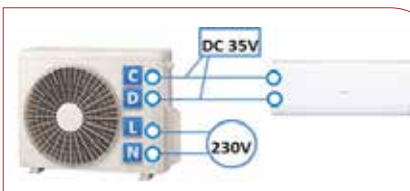



TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC-25FPA	RAC-35FPA	RAC-50FPA
Nominal Cooling Capacity (min - max)	kW	2.50 (0.90 - 3.10)	3.50 (1.10 - 4.20)	5.00 (1.90 - 5.20)
Nominal Heating Capacity (min - max)	kW	3.40 (0.90 - 4.40)	4.20 (1.10 - 5.20)	6.00 (2.20 - 7.30)
Nominal Cooling Power Input (min - max)	kW	0.67 (0.25 - 1.29)	0.94 (0.25 - 1.40)	1.51 (0.50 - 2.10)
Nominal Heating Power Input (min - max)	kW	0.85 (0.25 - 1.25)	1.05 (0.25 - 1.80)	1.66 (0.50 - 2.70)
EER / COP		3.73 / 4.00	3.72 / 4.00	3.31 / 3.61
SEER		5.8	6	5.86
Cooling energy efficiency class		A+	A+	A+
Cooling annual consumption	kWh / year	151	202	299
P design	kW	2.5	3.5	5.0
SCOP (average climate)		4.3	4.3	4
Heating energy efficiency class		A+	A+	A+
Heating annual consumption	kWh / year	774	989	1518
P design	kW	2.5	3.0	4.4
Cooling sound pressure level	dB(A)	47	48	51
Heating sound pressure level	dB(A)	49	49	52
Sound power	dB(A)	61	62	65
Air flow rate (Cooling / Heating)	m ³ / h	1.860 / 1.620	1.920 / 1.620	2.160 / 2.160
Dimensions (H x L x D)	mm	548 x 750 x 288	548 x 750 x 288	600 x 792 x 299
Weight	kg	31	35	40
Power supply	V / Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz	230V / 1Ph / 50Hz
Starting current	A	5.00	5.00	9.00
Nominal current	A	3.43 / 4.11	4.30 / 4.81	6.63 / 7.29
Piping diameter (Liq / Gas)	inch.	1/4 - 3/8	1/4 - 3/8	1/4 - 1/2
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Min piping length	m	5	5	5
Piping length / Max lift	m	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	0.87	1.05	1.00
Max pre-charge length / Amount of additional refrigerant	m / g / m	20 / -	20 / -	20 / -
Working range (Cooling / Heating)	°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C
Refrigerant		R410A	R410A	R410A
Compressor	type	ROTARY	ROTARY	ROTARY

INDOOR UNIT	Unit of measurement	RAF-25RPA	RAF-35RPA	RAF-50RPA
Cooling sound pressure (SL / L / M / H)	dB(A)	23 / 26 / 32 / 40	25 / 29 / 35 / 42	25 / 30 / 37 / 46
Heating sound pressure (SL / L / M / H)	dB(A)	23 / 27 / 33 / 40	26 / 30 / 35 / 42	25 / 30 / 37 / 47
Sound power	dB(A)	54	56	60
Cooling air flow rate (SL / L / M / H)	m ³ / h	378 / 462 / 540	400 / 485 / 600	430 / 530 / 650
Heating air flow rate (SL / L / M / H)	m ³ / h	408 / 498 / 600	440 / 525 / 600	470 / 570 / 720
Dehumidification	l / h	1.40	1.60	2.00
Dimensions (H x L x D)	mm	600 x 760 x 235	600 x 760 x 235	600 x 760 x 235
Weight	kg	14	14	14
Nominal current	A	3.43 / 4.11	4.30 / 4.81	6.63 / 7.29
Power supply	V	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR - 5E2	RAR - 5E2	RAR - 5E2



Mono Split

Ductable RAD-RPA

PAM DC inverter Split Heat pump



RAD 25~35~50 RPA



■ HEAD RISE SELECTOR:

depending on whether ductless or linear ducting (up to 4m) installation is opted for, fan head rise may be adjusted via a suitable selector on the electronic board

■ OPTIMISED REFRIGERANT CONNECTIONS FOR CONVENIENT INSTALLATION:

the refrigerant connections are located at the rear of the unit to make installation easier. Ideal for above door installation!

■ SEASONAL EFFICIENCY:

the air conditioner features good seasonal efficiency levels both in cooling and heating

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ OPTIONAL INFRA RED OR WIRED REMOTE CONTROLLER

The preferred type of controller may be selected (IR infra red or wired) on purchase. The IR controller includes a higher number of features.

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter). (*with IR controller only)

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes! (*with IR controller only)

■ INFO KEY:

room temperature reading, power consumption display, alarm signals (*with IR controller only)

■ CLEAN FEATURE:

evaporator drying to prevent mould formation (*with IR controller only)

+21
-15



+43
-10



BUILT-INCONDENSATE DRAIN PUMP

HEAD RISE SELECTOR

OPTIMISED REFRIGERANT CONNECTIONS FOR EASY INSTALLATION

SEASONAL EFFICIENCY

HEATING AT LOW TEMPERATURES

OPTIONAL INFRA RED OR WIRED REMOTE CONTROLLER

7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

RAC 25~35~50 NPA



■ BUILT-IN CONDENSATE DRAIN PUMP

This unit is fitted with an internal drain pump to remove the condensate water which accumulates in the drip pan during operation. A float monitors the water level and automatically actuates the pump when required.





TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC-25NPA	RAC-35NPA	RAC-50NPA
Nominal Cooling Capacity (min - max)	kW	2.50 (0.90 - 3.00)	3.50 (0.90 - 4.00)	5.00 (0.90 - 5.20)
Nominal Heating Capacity (min - max)	kW	3.50 (0.90 - 5.00)	4.80 (0.90 - 6.60)	6.50 (0.90 - 8.10)
Nominal Cooling Power Input (min - max)	kW	0.695 (0.155 - 1.050)	1.100 (0.1550 - 1.280)	1.990 (0.155 - 2.200)
Nominal Heating Power Input (min - max)	kW	0.940 (0.155 - 1.400)	1.360 (0.115 - 1.920)	2.160 (0.155 - 2.700)
EER / COP		3.60 / 3.61	2.82 / 2.82	2.50 / 2.61
SEER		5.1	5.1	4.7
Cooling energy efficiency class		A	A	B
Cooling annual consumption	kWh / year	171	239	372
P design	kW	2.5	3.5	5.0
SCOP (average climate)		3.8	3.8	3.8
Heating energy efficiency class		A	A	A
Heating annual consumption	kWh / year	966	1272	1520
P design	kW	2.6	3.5	4.1
Cooling sound pressure level	dB(A)	46	47	50
Heating sound pressure level	dB(A)	46	49	52
Sound power	dB(A)	65	65	65
Air flow rate (Cooling / Heating)	m ³ / h	- / -	- / -	- / -
Dimensions (H x L x D)	mm	570 x 750 x 280	570 x 750 x 280	650 x 850 x 298
Weight	kg	43	43	50
Power supply	V / Hz	AC 220 - 240V / 1ph / 50Hz	AC 220 - 240V / 1ph / 50Hz	AC 220 - 240V / 1ph / 50Hz
Starting current	A	4.20	4.20	10.00
Nominal current	A	3.20 - 2.93 / 4.30 - 3.96	4.94 - 4.72 / 6.04 - 5.77	9.20 - 8.40 / 10.60 - 9.70
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Min piping length	m	5	5	5
Piping length / Max lift	m	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	1.15	1.15	1
Max pre-charge length / Amount of additional refrigerant	m / g / m	20 / -	20 / -	20 / -
Working range (Cooling / Heating)	°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C
Refrigerant		R410A	R410A	R410A
Compressor	type	TWIN ROTARY	TWIN ROTARY	TWIN ROTARY

INDOOR UNIT	Unit of measurement	RAD-25RPA	RAD-35RPA	RAD-50RPA
Cooling sound pressure (SL / L / M / H)	dB(A)	29 / 31 / 34 / 36	29 / 31 / 34 / 36	29 / 32 / 35 / 38
Heating sound pressure (SL / L / M / H)	dB(A)	27 / 30 / 33 / 37	27 / 30 / 33 / 37	29 / 32 / 35 / 38
Sound power	dB(A)	56	59	56
Cooling air flow rate (SL / L / M / H)	m ³ / h	330 / 372 / 438 / 492	330 / 372 / 456 / 510	330 / 372 / 456 / 510
Heating air flow rate (SL / L / M / H)	m ³ / h	330 / 372 / 450 / 552	330 / 372 / 456 / 558	330 / 372 / 456 / 558
Cool-Heat. static pressure (L / M / H)*	Pa	25 / 28 / 34 - 26 / 29 / 36	26 / 29 / 36 - 26 / 29 / 39	26 / 29 / 36 - 26 / 29 / 39
Dehumidification	l / h	1.40	2.10	2.10
Condensate drain pump		included	included	included
Condensate drain pump lift	mm	300	300	300
Dimensions (H x L x D)	mm	235 x 750 x 400	235 x 750 x 400	235 x 750 x 400
Weight	kg	19	19	19
Nominal current	A	3.20 / 4.50	5.70 / 7.90	9.20 / 10.60
Power supply	V	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	not included	not included	not included

OPTIONAL REMOTE CONTROLLER	type	Infra Red	Infra Red	Infra Red
	code	SPX - RCKA	SPX - RCKA	SPX - RCKA
OPTIONAL REMOTE CONTROLLER	type	Wired controller	Wired controller	Wired controller
	code	SPX - RCDA	SPX - RCDA	SPX - RCDA

* referred to a 4m duct, please refer to technical documentation for full details



Mono Split

Ductable RAD-PPA

PAM DC inverter Split Heat pump



RAD 50~60~70 PPA



- **HEAD RISE SELECTOR:**
depending on whether ductless or ducted installation is opted for, fan head rise may be adjusted via a suitable selector on the electronic board. Three static pressure levels (30 / 50 / 80 Pa) may be selected. Ideal for very long ducting!
- **WASHABLE PREFILTER:**
the unit is fitted with a complementary washable prefilter
- **SEASONAL EFFICIENCY:**
the air conditioner features good seasonal efficiency levels both in cooling and heating
- **HEATING AT LOW TEMPERATURES:**
guaranteed efficiency in heating mode up to -15°C
- **OPTIONAL INFRA RED OR WIRED REMOTE CONTROLLER:**
The preferred type of controller may be selected (IR infra red or wired) on purchase. The IR controller includes a higher number of features

- **7-DAY TIMER:**
6 on/off settings for every day of the week, two storable programs (summer/winter). (*with IR controller only)
- **LEAVE HOME:**
the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes! (*with IR controller only)
- **INFO KEY:**
room temperature reading, power consumption display, alarm signals (*with IR controller only)
- **CLEAN FEATURE:**
evaporator drying to prevent mould formation (*with IR controller only)

■ BUILT-IN CONDENSATE DRAIN PUMP

This unit is fitted with an internal drain pump to remove the condensate water which accumulates in the drip pan during operation. A float monitors the water level and automatically actuates the pump when required.



+21
-15



+43
-10



BUILT-INCONDENSATE DRAIN PUMP

HEAD RISE SELECTOR

WASHABLE PREFILTER

SEASONAL EFFICIENCY

HEATING AT LOW TEMPERATURES

OPTIONAL INFRA RED OR WIRED REMOTE CONTROLLER


7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

RAC 50~60~70 DPA

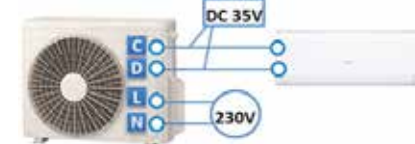



TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC-50DPA	RAC-60DPA	RAC-70DPA
Nominal Cooling Capacity (min - max)	kW	5.00 (0.90 - 6.00)	6.00 (0.90 - 7.00)	7.10 (0.90 - 8.00)
Nominal Heating Capacity (min - max)	kW	6.00 (0.90 - 7.00)	7.30 (0.90 - 8.00)	8.00 (0.90 - 9.00)
Nominal Cooling Power Input (min - max)	kW	1.40 (2.00 - 2.10)	1.87 (2.00 - 2.50)	2.53 (2.00 - 2.92)
Nominal Heating Power Input (min - max)	kW	1.59 (2.00 - 2.20)	2.13 (2.00 - 2.60)	2.34 (2.00 - 3.10)
EER / COP		3.57 / 3.77	3.21 / 3.43	2.81 / 3.42
SEER		5.4	5.1	5.1
Cooling energy efficiency class		A	A	A
Cooling annual consumption	kWh / year	325	411	481
P design	kW	5.0	6.0	7.1
SCOP (average climate)		3.8	3.8	3.8
Heating energy efficiency class		A	A	A
Heating annual consumption	kWh / year	1595	2007	1828
P design	kW	4.4	5.4	5.0
Cooling sound pressure level	dB(A)	4.4	5.4	5.0
Heating sound pressure level	dB(A)	50	51	55
Sound power	dB(A)	65	65	67
Air flow rate (Cooling / Heating)	m ³ / h	- / -	- / -	- / -
Dimensions (H x L x D)	mm	800 x 850 x 298	800 x 850 x 298	800 x 850 x 298
Weight	kg	65	65	60
Power supply	V / Hz	220 - 230V / 1Ph / 50Hz	220 - 230V / 1Ph / 50Hz	220 - 230V / 1Ph / 50Hz
Starting current	A	10.00	10.00	10.00
Nominal current	A	6.40 - 5.90 / 7.30 - 6.70	8.55 - 7.90 / 9.75 - 9.00	11.60 - 10.70 / 10.70 - 9.80
Piping diameter (Liq / Gas)	inch.	1/4" - 1/2"	1/4" - 1/2"	1/4" - 5/8"
	mm	6.35 - 12.70	6.35 - 12.70	6.35 - 15.88
Min piping length	m	5	5	5
Piping length / Max lift	m	30 / 20	30 / 20	30 / 20
Amount of pre-charged refrigerant	kg	1.80	1.80	2
Max pre-charge length / Amount of additional refrigerant	m / g / m	30 / -	30 / -	30 / -
Working range (Cooling / Heating)	°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C
Refrigerant		R410A	R410A	R410A
Compressor	type	TWIN ROTARY	TWIN ROTARY	TWIN ROTARY

INDOOR UNIT	Unit of measurement	RAD-50PPA	RAD-60PPA	RAD-70PPA
Cooling sound pressure (SL / L / M / H)	dB(A)	28 / 30 / 32 / 34	28 / 30 / 32 / 34	28 / 30 / 32 / 35
Heating sound pressure (SL / L / M / H)	dB(A)	29 / 31 / 33 / 35	29 / 31 / 33 / 35	29 / 31 / 33 / 36
Sound power	dB(A)	60	60	58
Cooling air flow rate (SL / L / M / H)	m ³ / h	618 / 660 / 780 / 900	618 / 660 / 780 / 900	618 / 660 / 780 / 960
Heating air flow rate (SL / L / M / H)	m ³ / h	618 / 660 / 780 / 900	618 / 660 / 780 / 900	618 / 660 / 780 / 960
Static pressure (SL / L / M / H)	Pa	- / 30 / 50 / 80	- / 30 / 50 / 80	- / 30 / 50 / 80
Dehumidification	l / h	2.80	2.80	2.80
Condensate drain pump		included	included	included
Condensate drain pump lift	mm	500	500	500
Dimensions (H x L x D)	mm	270 x 900 x 720	270 x 900 x 720	270 x 900 x 720
Weight	kg	35	35	35
Nominal current	A	6.4-5.9 / 7.3-6.7	8.55-7.90 / 9.75-9.00	11.60 / 10.70
Power supply	V	35V DC & 230V, 1Ph, 50Hz from outdoor unit	35V DC & 230V, 1Ph, 50Hz from outdoor unit	35V DC & 230V, 1Ph, 50Hz from outdoor unit
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	not included	not included	not included

OPTIONAL REMOTE CONTROLLER	type	Infra Red	Infra Red	Infra Red
	code	SPX - RCKA	SPX - RCKA	SPX - RCKA
OPTIONAL REMOTE CONTROLLER	type	Wired controller	Wired controller	Wired controller
	code	SPX - RCDA	SPX - RCDA	SPX - RCDA



Mono Split

4 Way Cassette RAI-RPA

PAM DC inverter Heat pump



RAI 25~35~50 RPA
+ RAI - ECPP PANEL




■ COMPACT DESIGN:

Thanks to its compact design, the 60 x 60 cm cassette unit fits into a standard ceiling module, thus reducing installation work to the minimum.

■ FLEXIBILITY OF USE:

The user may opt for 2, 3 or 4-way operation of automatic swing air outlets. Furthermore, when the unit is installed on high ceilings, air flow power may be increased by means of a switch.

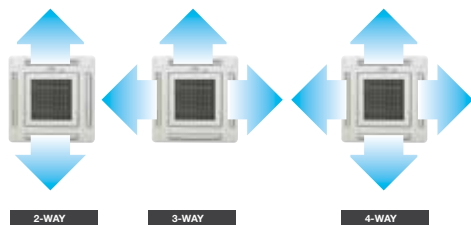

■ EXCEPTIONAL SEASONAL EFFICIENCY:

the air conditioner features exceptional seasonal

■ BUILT-IN CONDENSATE DRAIN PUMP

This unit is fitted with an internal drain pump to remove the condensate water which accumulates in the drip pan during operation. A float monitors the water level and automatically actuates the pump when required.



efficiency levels both in cooling and heating mode.

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter).

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!

■ INFO KEY:

room temperature reading, power consumption display, alarm signals

■ CLEAN FEATURE:

the evaporator is dried to prevent mould formation

+21
-15



+43
-10



BUILT-INCONDENSATE DRAIN PUMP

COMPACT DESIGN

FLEXIBILITY OF USE

SEASONAL EFFICIENCY

HEATING AT LOW TEMPERATURES


7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

RAC 25~35~50 NPA

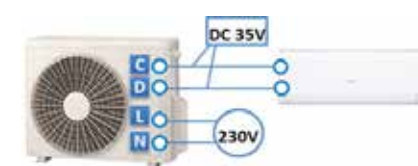



TECHNICAL SPECIFICATIONS

OUTDOOR UNIT	Unit of measurement	RAC-25NPA	RAC-35NPA	RAC-50NPA
Nominal Cooling Capacity (min - max)	kW	2.50 (0.90 - 3.00)	3.50 (0.90 - 4.00)	5.00 (0.90 - 5.20)
Nominal Heating Capacity (min - max)	kW	3.50 (0.90 - 5.00)	4.80 (0.90 - 6.60)	6.50 (0.90 - 8.10)
Nominal Cooling Power Input (min - max)	kW	0.695 (0.155 - 1.050)	1.100 (0.155 - 1.280)	1.990 (0.155 - 2.200)
Nominal Heating Power Input (min - max)	kW	0.940 (0.155 - 1.400)	1.36 (0.115 - 1.920)	2.160 (0.155 - 2.700)
EER / COP		3.60 / 3.72	3.18 / 3.53	2.51 / 3.01
SEER		5.7	5.8	5.2
Cooling energy efficiency class		A+	A+	A
Cooling annual consumption	kWh / year	150	210	340
P design	kW	2.5	3.5	5.0
SCOP (average climate)		3.8	3.8	3.8
Heating energy efficiency class		A	A	A
Heating annual consumption	kWh / year	1000	1310	1540
P design	kW	2.7	3.6	4.2
Cooling sound pressure level	dB(A)	2.7	3.6	4.2
Heating sound pressure level	dB(A)	46	49	52
Sound power	dB(A)	65	65	65
Air flow rate (Cooling / Heating)	m ³ / h	- / -	- / -	- / -
Dimensions (H x L x D)	mm	570 x 750 x 280	570 x 750 x 280	650 x 850 x 298
Weight	kg	43	43	50
Power supply	V / Hz	AC 220 - 240V / 1ph / 50Hz	AC 220 - 240V / 1ph / 50Hz	AC 220 - 240V / 1ph / 50Hz
Starting current	A	4.20	4.20	10.00
Nominal current	A	3.20 - 2.93 / 4.30 - 3.96	4.94 - 4.72 / 6.04 - 5.77	9.20 - 8.40 / 10.60 - 9.70
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Min piping length	m	5	5	5
Piping length / Max lift	m	20 / 10	20 / 10	20 / 10
Amount of pre-charged refrigerant	kg	1.15	1.15	1.00
Max pre-charge length / Amount of additional refrigerant	m / g / m	20 / -	20 / -	20 / -
Working range (Cooling / Heating)	°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C	-10°C +43°C / -15°C +21°C
Refrigerant		R410A	R410A	R410A
Compressor	type	TWIN ROTARY	TWIN ROTARY	TWIN ROTARY

INDOOR UNIT	Unit of measurement	RAI-25RPA	RAI-35RPA	RAI-50RPA
Cooling sound pressure (SL / L / M / H)	dB(A)	25 / 29 / 32 / 35	26 / 29 / 34 / 39	29 / 32 / 35 / 43
Heating sound pressure (SL / L / M / H)	dB(A)	27 / 30 / 33 / 36	29 / 32 / 36 / 40	30 / 32 / 36 / 43
Sound power	dB(A)	52	56	58
Cooling air flow rate (SL / L / M / H)	m ³ / h	330 / 348 / 420 / 510	330 / 348 / 480 / 648	330 / 348 / 480 / 720
Heating air flow rate (SL / L / M / H)	m ³ / h	330 / 348 / 420 / 510	330 / 348 / 480 / 648	330 / 348 / 480 / 720
Dehumidification	l / h	1.40	1.80	2.00
Condensate drain pump		included	included	included
Condensate drain pump head rise	mm	115	115	115
Dimensions (H x L x D)	mm	285 x 580 x 580	285 x 580 x 580	285 x 580 x 580
Weight	kg	20	20	20
Nominal current	A	3.20 / 4.40	5.10 / 6.20	9.10 / 9.90
Power supply	V	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR - 5E2	RAR - 5E2	RAR - 5E2

PANEL	Unit of measurement	RAI-ECPP	RAI-ECPP	RAI-ECPP
Panel dimensions (H x L x D)	mm	32 x 650 x 650	32 x 650 x 650	32 x 650 x 650
Panel weight	kg	4	4	4
Panel colour (RAL)		RAL 9010	RAL 9010	RAL 9010

WIRED OPTIONAL REMOTE CONTROLLER	type	Wired controller	Wired controller	Wired controller
	code	SPX - RCDB	SPX - RCDB	SPX - RCDB



Multi Split

Multi Air Conditioners

Guide to the MULTI product codes

RAK 25QPA

INDOOR UNITS example:

What type of air conditioner?

RAK = wall
RAF = floor
RAI = 4-way cassette
RAD = ductable

What cooling capacity?

XW = X,Y kW

What type of combination?

P = only mono-split
Q = only multi-split
R = mono and multi-split

What family of products?

X = Cut Out
P = Performance

What series of products?

A = series 1

RAM 53NP3A

OUTDOOR UNITS example:

What type of combination?

RAC = only mono-split
RAM = only multi-split

What cooling capacity?

XW = X,Y kW

What type of application?

W = wall
F = floor
C = 4-way cassette
D = ductable
N = universal

What family of products?

P = all Multi

How many connections (only for multi-split)?

2, 3, ..., 6 =
2, 3, ..., 6 environments

What series of products?

A = series 1



Wall "Performance"



Wall "Cut Out"



Floor "Cut Out"



Floor




Great Flexibility

It is possible to connect up to 6 indoor units with only one Multi outdoor unit




Ductable

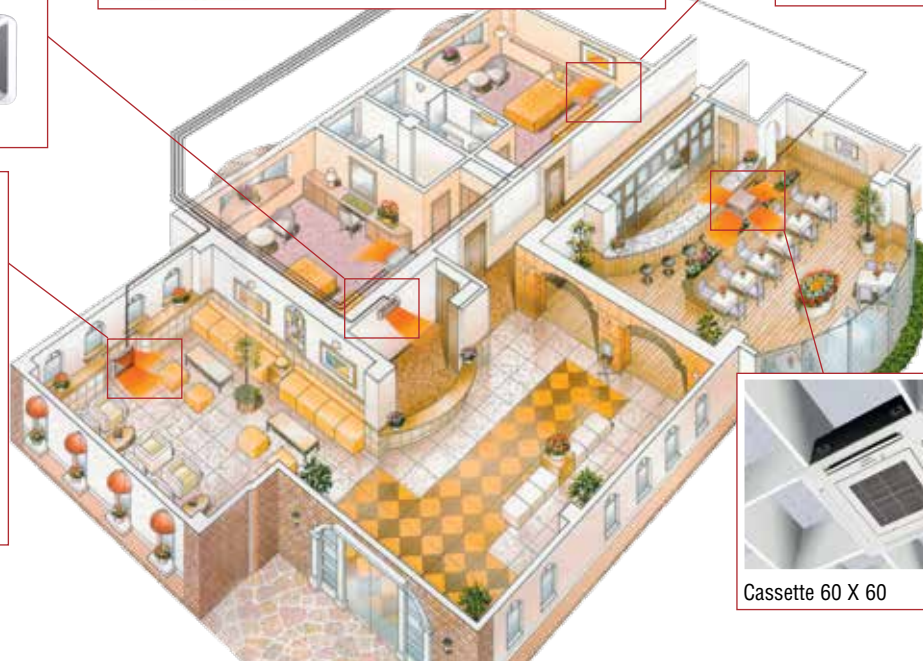

Cassette 60 X 60



The range of systems you can choose from support up to a total of 6 indoor units (Multi) with a single outdoor unit. The Multi indoor Units are able to meet any requirement with wall, floor, 60 x 60 cassette and ductable models, designed to offer elegance and comfort in any application: this makes Multi systems an ideal and flexible solution.

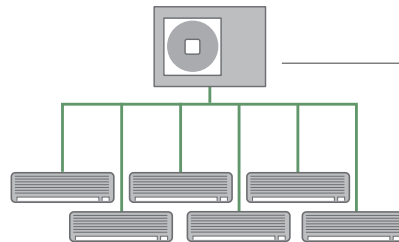

Multi Outdoor Unit

Up to 6 indoor units (Multi)

Multizone DC Inverter PAM

Indoor units		Power (kW)				
		1.2	1.8	2.5	3.5	5.0
Wall Cut Out	RAK QXA	■	■	■	■	■
Wall Performance	RAK QPA	■	■	■	■	■
Floor Cut Out	RAF QXA			■	■	■
Floor Performance	RAF RPA			■	■	■
4-Way Cassette	RAI RPA			■	■	■
Ductable	RAD RPA		■	■	■	■

Multi Outdoor Units		Power (kW)						
		3.6	5.3	5.3	6.8	7.0	8.5	12.6
No. of indoor units		2	2	3	3	4	5	6
Multizone	RAM-NP	■	■	■	■	■	■	■





Multi Split

Wall Cut Out RAK-QXA

PAM DC inverter Heat pump



RAK 18~25~35~50 QXA



ELEGANT DESIGN

WASABI NANO TITANIUM

MINIMUM ADJUSTABLE CAPACITY

HEATING AT LOW TEMPERATURES

SUPER QUIET

7-DAY TIMER

INFO KEY

CLEAN FEATURE

■ ELEGANT DESIGN:

designed to combine comfort and functionality with refined and streamlined aesthetics

■ WASABI NANO TITANIUM:

the WASABI NANO TITANIUM air filter supplied guarantees the high quality of the air you breathe in your room

■ MINIMUM ADJUSTABLE CAPACITY:

The RAK 18QXA unit may be reduced to 1.2 KW nominal power for installation in very small rooms

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ SUPER QUIET:

only 20dBA noise level at the SUPER LOW speed

■ - peaceful sleep is guaranteed

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter).

■ INFO KEY:

room temperature reading, power consumption display, alarm signals

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!

■ CLEAN FEATURE:

the evaporator is dried to prevent mould formation

TECHNICAL SPECIFICATIONS

INDOOR UNIT	Unit of measurement	RAK 18QXA	RAK 25QXA	RAK 35QXA	RAK 50QXA
Cooling sound pressure (SL / L / M / H)	dB(A)	20 / 23 / 26 / 32	20 / 26 / 32 / 37	22 / 29 / 35 / 39	25 / 31 / 39 / 47
Heating sound pressure (SL / L / M / H)	dB(A)	20 / 24 / 27 / 33	20 / 27 / 33 / 39	22 / 30 / 35 / 41	25 / 31 / 39 / 48
Sound power	dB(A)	54	57	59	59
Cooling air flow rate (SL / L / M / H)	m ³ / h	180 / 228 / 252 / 396	240 / 360 / 420 / 510	276 / 336 / 420 / 522	288 / 408 / 552 / 690
Heating air flow rate (SL / L / M / H)	m ³ / h	180 / 228 / 252 / 450	198 / 318 / 420 / 570	264 / 396 / 510 / 618	288 / 432 / 570 / 780
Dehumidification	l / h	1.20	1.40	1.60	2.80
Dimensions (H x L x D)	mm	295 x 795 x 198	295 x 795 x 198	295 x 795 x 198	295 x 795 x 198
Weight	kg	9.50	10.00	10.00	10.00
Nominal current	A	1.80 (1.00 - 2.50)	2.50 (1.00 - 3.10)	3.50 (1.00 - 4.00)	5.00 (0.90 - 5.20)
Power supply	V / Hz	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red	Infra Red
	code	RAR - 5E2	RAR - 5E2	RAR - 5E2	RAR - 5E2



Wall Performance RAK-QPA

PAM DC inverter Heat pump

RAK 18~25~35~50 QPA



WASABI NANO TITANIUM

MINIMUM ADJUSTABLE CAPACITY

HEATING AT LOW TEMPERATURES

SUPER QUIET

7-DAY TIMER

INFO KEY

LEAVE HOME

CLEAN FEATURE

■ WASABI NANO TITANIUM:

the WASABI NANO TITANIUM air filter supplied guarantees the high quality of the air you breathe in your room

■ MINIMUM ADJUSTABLE CAPACITY:

The RAK 18QPA unit may be reduced to 1.2 KW nominal power for installation in very small rooms

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ SUPER QUIET:

only 20dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter).

■ INFO KEY:

room temperature reading, power consumption display, alarm signals

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!

■ CLEAN FEATURE:

the evaporator is dried to prevent mould formation

TECHNICAL SPECIFICATIONS

INDOOR UNIT	Unit of measurement	RAK 18QPA	RAK 25QPA	RAK 35QPA	RAK 50QPA
Cooling sound pressure level (SL / L / M / H)	dB(A)	20 / 26 / 30 / 35	20 / 26 / 32 / 38	25 / 29 / 35 / 41	27 / 31 / 39 / 47
Heating sound pressure level (SL / L / M / H)	dB(A)	23 / 27 / 33 / 36	23 / 27 / 33 / 39	26 / 30 / 35 / 41	27 / 31 / 39 / 47
Sound power	dB(A)	56	57	57	60
Cooling air flow rate (SL / L / M / H)	m ³ / h	282 / 348 / 402 / 438	288 / 360 / 420 / 510	348 / 390 / 480 / 606	360 / 408 / 600 / 810
Heating air flow rate (SL / L / M / H)	m ³ / h	342 / 348 / 420 / 480	288 / 420 / 480 / 570	348 / 450 / 510 / 648	390 / 408 / 600 / 810
Dehumidification	l / h	1.20	1.40	1.60	2.80
Dimensions (H x L x D)	mm	300 x 790 x 230	300 x 790 x 230	300 x 790 x 230	300 x 790 x 230
Weight	kg	10	10	10	10
Nominal current	A	2.57 - 2.36 / 3.17 - 2.90	3.44 - 3.16 / 3.17 - 3.66	5.00 - 4.59 / 4.96 - 4.55	8.14 - 7.50 / 9.00 - 8.30
Power supply	V - Hz	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Condensate drain diameter (ext)	mm	Ø16mm	Ø16mm	Ø16mm	Ø16mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red	Infra Red
	code	RAR - 5E1	RAR - 5E1	RAR - 5E1	RAR - 5E1



Multi Split


Floor Cut Out RAF-QXA



PAM DC inverter Heat pump



RAF 25~35~50 QXA

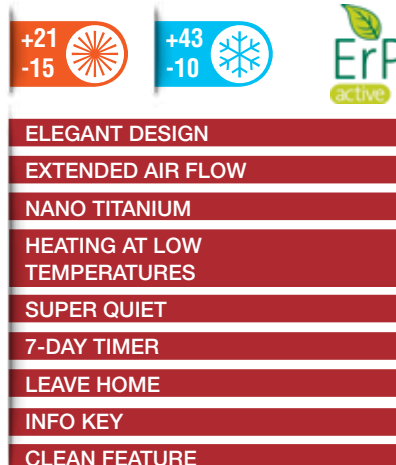

■ ELEGANT DESIGN:

designed to combine comfort and functionality with refined and streamlined aesthetics, it can also be installed suspended above the floor without the white stand

■ EXTENDED AIR FLOW

The air flow power can be increased to reach the furthest corners of the room

■ NANO TITANIUM:

the NANO TITANIUM air filter supplied guarantees high quality of the air you breathe in your room

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ SUPER QUIET:

only 20dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter).

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!

■ INFO KEY:

room temperature reading, power consumption display, alarm signals

■ CLEAN FEATURE:

the evaporator is dried to prevent mould formation

TECHNICAL SPECIFICATIONS

INDOOR UNIT	Unit of measurement	RAF 25QXA	RAF 35QXA	RAF 50QXA
Cooling sound pressure (SL / L / M / H)	dB(A)	20 / 26 / 31 / 38	20 / 26 / 31 / 40	22 / 29 / 36 / 44
Heating sound pressure (SL / L / M / H)	dB(A)	20 / 26 / 32 / 38	20 / 26 / 32 / 39	22 / 30 / 36 / 45
Sound power	dB(A)			
Cooling air flow rate (SL / L / M / H)	m ³ / h	270 / 420 / 480 / 570	270 / 390 / 510 / 684	300 / 450 / 540 / 750
Heating air flow rate (SL / L / M / H)	m ³ / h	300 / 408 / 540 / 630	300 / 420 / 540 / 690	390 / 480 / 600 / 780
Dehumidification	l / h	1.40	1.80	2.00
Dimensions (H x L x D)	mm	590 x 750 x 215	590 x 750 x 215	590 x 750 x 215
Weight	kg	15	15	15
Nominal current	A			
Power supply	V - Hz	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 12.70
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR - 5E4	RAR - 5E4	RAR - 5E4



Floor Performance RAF-RPA

PAM DC inverter Heat pump



RAF 25~35~50 RPA



NANO TITANIUM

HEATING AT LOW TEMPERATURES

QUIET

7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

■ NANO TITANIUM:

the NANO TITANIUM air filter supplied guarantees high quality of the air you breathe in your room

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ QUIET:

only 23dBA noise level at the SUPER LOW speed - peaceful sleep is guaranteed

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter).

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!

■ INFO KEY:

room temperature reading, power consumption display, alarm signals

■ CLEAN FEATURE:

the evaporator is dried to prevent mould formation

TECHNICAL SPECIFICATIONS

INDOOR UNIT	Unit of measurement	RAF 25RPA	RAF 35RPA	RAF 50RPA
Cooling sound pressure (SL / L / M / H)	dB(A)	23 / 26 / 32 / 40	25 / 29 / 35 / 42	25 / 30 / 37 / 46
Heating sound pressure (SL / L / M / H)	dB(A)	23 / 27 / 33 / 40	26 / 30 / 35 / 42	25 / 30 / 37 / 47
Sound power	dB(A)	54	56	60
Cooling air flow rate (SL / L / M / H)	m ³ / h	378 / 462 / 540	400 / 485 / 600	430 / 530 / 650
Heating air flow rate (SL / L / M / H)	m ³ / h	408 / 498 / 600	440 / 525 / 600	470 / 570 / 720
Dehumidification	l / h	1.40	1.60	2.00
Dimensions (H x L x D)	mm	600 x 760 x 235	600 x 760 x 235	600 x 760 x 235
Weight	kg	14	14	14
Nominal current	A	3.43 / 4.11	4.30 / 4.81	6.63 / 7.29
Power supply	V - Hz	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Piping diameter (Liq / Gas)	inch.	1/4 - 3/8	1/4 - 3/8	1/4 - 1/2
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR - 5E2	RAR - 5E2	RAR - 5E2



Multi Split

4 Way Cassette RAI-RPA



PAM DC inverter Heat pump

RAI 25~35~50 RPA
+ RAI - ECPP PANEL



- BUILT-IN CONDENSATE DRAIN PUMP
- COMPACT DESIGN
- FLEXIBILITY OF USE
- HEATING AT LOW TEMPERATURES
- 7-DAY TIMER
- LEAVE HOME
- INFO KEY
- CLEAN FEATURE

■ COMPACT DESIGN:

Thanks to its compact design, the 60 x 60 cm cassette unit fits into a standard ceiling module, thus reducing installation work to the minimum.

■ FLEXIBILITY OF USE:

The user may opt for 2, 3 or 4-way operation of automatic swing air outlets. Furthermore, when the unit is installed on high ceilings, air flow power may be increased by means of a switch.

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter).

■ LEAVE HOME:


the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes!

■ INFO KEY:

room temperature reading, power consumption display, alarm signals

■ CLEAN FEATURE:

the evaporator is dried to prevent mould formation

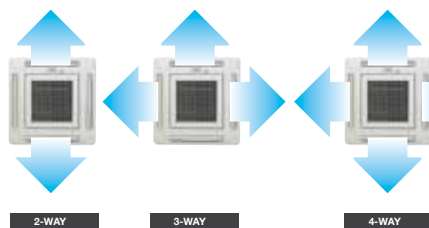

■ BUILT-IN CONDENSATE DRAIN PUMP

This unit is fitted with an internal drain pump to remove the condensate water which accumulates in the drip pan during operation. A float monitors the water level and automatically actuates the pump when required.



TECHNICAL SPECIFICATIONS

INDOOR UNIT	Unit of measurement	RAI 25RPA	RAI 35RPA	RAI 50RPA
Cooling sound pressure (SL / L / M / H)	dB(A)	25 / 29 / 32 / 35	26 / 29 / 34 / 39	29 / 32 / 35 / 43
Heating sound pressure (SL / L / M / H)	dB(A)	27 / 30 / 33 / 36	29 / 32 / 36 / 40	30 / 32 / 36 / 43
Sound power	dB(A)	50	58	58
Cooling air flow rate (SL / L / M / H)	m ³ / h	330 / 348 / 420 / 510	330 / 348 / 480 / 648	330 / 348 / 480 / 720
Heating air flow rate (SL / L / M / H)	m ³ / h	330 / 348 / 420 / 510	330 / 348 / 480 / 648	330 / 348 / 480 / 720
Dehumidification	l / h	1.40	1.80	2.00
Condensate drain pump		included	included	included
Condensate drain pump head rise	mm	115	115	115
Dimensions (H x L x D)	mm	285 x 580 x 580	285 x 580 x 580	285 x 580 x 580
Weight	kg	20	20	20
Nominal current	A	3.20 / 4.40	5.10 / 6.20	9.10 / 9.90
Power supply	V	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 12.70
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	type	Infra Red	Infra Red	Infra Red
	code	RAR - 5E2	RAR - 5E2	RAR - 5E2

Panel	code	RAI-ECPP	RAI-ECPP	RAI-ECPP
Panel dimensions (H x L x D)	mm	32 x 650 x 650	32 x 650 x 650	32 x 650 x 650
Panel weight	kg	4	4	4
Panel colour (RAL)	-	RAL 9010	RAL 9010	RAL 9010



Ductable RAD-RPA

PAM DC inverter Heat pump



RAD 25~35~50 RPA



■ HEAD RISE SELECTOR:

depending on whether ductless or linear ducting (up to 4m) installation is opted for, fan head rise may be adjusted via a suitable selector on the electronic board

■ OPTIMISED REFRIGERANT CONNECTIONS FOR CONVENIENT INSTALLATION:

the refrigerant connections are located at the rear of the unit to make installation easier. Ideal for above door installation!

■ HEATING AT LOW TEMPERATURES:

guaranteed efficiency in heating mode up to -15°C

■ OPTIONAL INFRA RED OR WIRED REMOTE CONTROLLER:

The preferred type of controller may be selected (IR infra red or wired) on purchase. The IR controller includes a higher number of features.

■ 7-DAY TIMER:

6 on/off settings for every day of the week, two storable programs (summer/winter). (*with IR controller only)

■ LEAVE HOME:

the feature lets you set a minimum hold temperature (10°C) in heating mode for the periods you are away either on holiday or business; up to 99 days may be set. Ideal for holiday homes! (*with IR controller only)

■ INFO KEY:

room temperature reading, power consumption display, alarm signals (*with IR controller only)

■ CLEAN FEATURE:

evaporator drying to prevent mould formation (*with IR controller only)

+21
-15+43
-10

BUILT-INCONDENSATE DRAIN PUMP

HEAD RISE SELECTOR

OPTIMISED REFRIGERANT
CONNECTIONS FOR EASY INSTALLATIONHEATING AT LOW
TEMPERATURESOPTIONAL INFRA RED OR WIRED
REMOTE CONTROLLER

7-DAY TIMER

LEAVE HOME

INFO KEY

CLEAN FEATURE

■ BUILT-IN CONDENSATE DRAIN PUMP

This unit is fitted with an internal drain pump to remove the condensate water which accumulates in the drip pan during operation. A float monitors the water level and automatically actuates the pump when required.



TECHNICAL SPECIFICATIONS

INDOOR UNIT	Unit of measurement	RAD 18RPA	RAD 25RPA	RAD 35RPA	RAD 50RPA
Cooling sound pressure (SL / L / M / H)	dB(A)	29 / 31 / 34 / 36	29 / 31 / 34 / 36	29 / 31 / 34 / 36	29 / 32 / 35 / 38
Heating sound pressure (SL / L / M / H)	dB(A)	27/30/33/37	27/30/33/37	27-30-33-37	29/32/35/38
Sound power	dB(A)		57	57	58
Cooling air flow rate (SL / L / M / H)	m ³ / h	330 / 372 / 438 / 492	330 / 372 / 438 / 492	330 / 372 / 456/510	330/372/456/510
Heating air flow rate (SL / L / M / H)	m ³ / h	330 / 372 / 450 / 552	330 / 372 / 450 / 552	330 / 372 / 456 / 558	330 / 372 / 456 / 558
Cool.-Heat. static pressure (L / M / H)*	Pa	25/28/34 - 26/29/36	25/28/34 - 26/29/36	26/29/36 - 26/29/39	26/29/36 - 26/29/39
Dehumidification	l / h	1.40	1.40	2.10	2.10
Condensate drain pump		included	included	included	included
Condensate drain pump head rise	mm	300	300	300	300
Dimensions (H x L x D)	mm	235 x 750 x 400	235 x 750 x 400	235 x 750 x 400	235 x 750 x 400
Weight	kg	19	19	19	19
Nominal current	A	2.60 / 3.20	3.20 / 4.50	5.70 / 7.90	9.20 / 10.60
Power supply	V	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit	35 V DC from outdoor unit
Piping diameter (Liq / Gas)	inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
	mm	6.35 - 9.52	6.35 - 9.52	6.35 - 9.52	6.35 - 12.7
Condensate drain diameter (ext)	mm	Ø 16 mm	Ø 16 mm	Ø 16 mm	Ø 16 mm
Standard remote controller	code	not included	not included	not included	not included

Optional remote controller	type	Infra Red	Infra Red	Infra Red	Infra Red
	code	SPX - RCKA	SPX - RCKA	SPX - RCKA	SPX - RCKA
Optional remote controller	type	Wired controller	Wired controller	Wired controller	Wired controller
	code	SPX - RCDA	SPX - RCDA	SPX - RCDA	SPX - RCDA

* referred to a 4m duct, please refer to technical documentation for full details



Multi Split

Multi outdoor units

PAM DC inverter Multisplit heat pump



TECHNICAL SPECIFICATIONS

OUTDOOR UNIT		RAM-36NP2A	RAM-53NP2A	RAM-53NP3A
Nominal Cooling Capacity (min - max)	kW	3.60 (1.50 - 4.00)	5.30 (1.50 - 6.60)	5.30 (1.50 - 6.60)
Nominal Heating Capacity (min - max)	kW	5.20 (1.50 - 5.50)	6.80 (1.50 - 7.20)	6.80 (1.50 - 7.20)
Nominal Cooling Power Input (min - max)	kW	0.97 (0.20 - 1.05)	1.53 (0.20 - 1.66)	1.56 (0.20 - 1.68)
Nominal Heating Power Input (min - max)	kW	1.25 (0.20 - 1.50)	1.79 (0.20-2.01)	1.69 (0.20 - 1.86)
EER / COP		3.71 / 4.16	3.47 / 3.80	3.41 / 4.03
SEER		6.6	6.1	6.1
Cooling energy efficiency class		A++	A+	A+
Cooling annual consumption	kWh / year	190	310	310
P design	kW	3.6	5.3	5.3
SCOP (average climate)		4.2	4.0	4.0
Heating energy efficiency class		A+	A+	A+
Heating annual consumption	kWh / year	1,070	1,750	1,750
P design	kW	3.2	5.0	5.0
No. of fans		1	1	1
Nominal Cool. / Heat. input @ 220V - 50Hz	A	4.44 / 3.90	7.00 / 8.20	7.14 / 7.71
Max. input current	A	5.80	11.00	11.00
Cooling working range	°C	-10 +43	-10 +43	-10 +43
Heating working range	°C	-15 +21	-15 +21	-15 +21
Refrigerant		R410A	R410A	R410A
Compressor	type	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
Refrigerant charge	g	1,450	1,650	1,650
Pre-charge / additional charge	m / g / m	35 / -	35 / -	35 / 20
Min-max refrigerant line length	m	5 - 35	5 - 35	5 - 45
Max. lift	m	20	20	20
Piping section	mm	6.35 x 2 / 9.52 x 2	6.35 x 2 / 9.52 x 2	6.35 x 3 / 9.52 x 3
	inch.	1/4" x 2 - 3/8" x 2	1/4" x 2 - 3/8" x 2	1/4" x 3 - 3/8" x 3
Dimensions (H x L x D)	m	570 x 750 x 280	650 x 850 x 298	650 x 850 x 298
Weight	kg	40	50	50
Cooling sound pressure level (night mode)	dB(A)	49 (43)	52 (45)	52 (45)
Heating sound pressure level (night mode)	dB(A)	51 (44)	53 (45)	53 (45)
Sound power level at nominal output (Cool. / Heat.)	dB(A)	65	65	65
Air flow rate (Cool. / Heat.)	m³ / h	1.620 / 1.620	n.d.	n.d.
No. of connectible indoor units (max - min)		2 - 2	2 - 2	3 - 2



RAM 36 NP2A
RAM 53 NP2A
RAM 53 NP3A
RAM 68 NP3A



RAM 70 NP4A



RAM 90 NP5A



RAM 130 NP5A



UP TO 6 INDOOR
CONNECTIBLE UNITS

WIDE CHOICE OF POTENTIAL AND
TYPE OF UNITS WITH 6 DIFFERENT
MODELS

COOLING UP TO -10°C

HEATING UP TO -15°C

Specifications relating to the following combinations:

RAM 36NP2A: RAK-18QPA + RAK 18QPA

RAM 53NP2A: RAK 18QPA + RAK 35QPA

RAM 53NP3A: RAK 18QPA + RAK 35QPA

RAM 68NP3A: RAK 18QPA + RAK 50QPA

RAM 70NP4A: RAK 35QPA + RAK 35QPA

RAM 90NP5A: RAK 35QPA + RAK 50QPA

TECHNICAL SPECIFICATIONS

OUTDOOR UNIT		RAM-68NP3A	RAM-70NP4A	RAM-90NP5A	RAM 130NP6A*
Nominal Cooling Capacity (min - max)	kW	6.80 (2.40 - 8.80)	7.00 (2.40 - 8.80)	8.50 (1.50 - 9.50)	12.60 (1.50 - 13.20)
Nominal Heating Capacity (min - max)	kW	8.50 (2.80 - 9.50)	8.50 (2.80 - 9.50)	11.00 (1.50 - 11.50)	14.40 (1.50 - 14.40)
Nominal Cooling Power Input (min - max)	kW	2.12 (0.46 - 3.20)	2.11 (0.46 - 3.20)	2.23 (0.20 - 3.85)	4.19 (0.20 - 4.40)
Nominal Heating Power Input (min - max)	kW	2.28 (0.48 - 3.12)	2.11 (0.48 - 3.12)	2.46 (0.20 - 3.85)	3.80 (0.20 - 4.22)
EER / COP		3.21 / 3.73	3.32 / 4.03	3.81 / 4.47	3.01 / 3.79
SEER		5.8	5.7	5.3	-
Cooling energy efficiency class		A+	A+	A	-
Cooling annual consumption	kWh / year	412	432	557	-
P design	kW	6.8	7.0	8.5	-
SCOP (average climate)		4.0	3.8	3.8	-
Heating energy efficiency class		A+	A	A	-
Heating annual consumption	kWh / year	2,087	2,180	2,699	-
P design	kW	6.0	5.9	7.4	-
No. of fans		1	1	1	2
Nominal Cool. / Heat. input @ 220V - 50Hz	A	9.73 / 10.50	9.70 / 9.70	10.20 / 11.29	19.20 / 17.40
Max. input current	A	10.00	16.00	16.00	20.00
Cooling working range	°C	-10 +43	-10 +43	-10 +43	-10 +43
Heating working range	°C	-15 +21	-15 +21	-15 +21	-15 +21
Refrigerant		R410A	R410A	R410A	R410
Compressor	type	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
Refrigerant charge	g	2,300	2,300	2,700	1.650 x 2
Pre-charge / additional charge	m / g / m	30 / 20	30 / 20	30 / 15	35 / 20 x 2
Min-max refrigerant line length	m	5 - 60	5 - 60	5 - 75	5 - 45 x 2
Max. lift	m	20	20	20	20 x2
Piping section	mm	6.35 x 3 / 9.52 x 3	6.35 x 4 / 9.52 x 3 + 12.70 x 1	6.35 x 5 / 9.52 x 4 + 12.70 x 1	6.35 x 6 / 9.52 x 6
	inch.	1/4" x 3 - 3/8" x 3	1/4" x 4 - 3/8" x 3 + 1/2" x 1	1/4" x 5 - 3/8" x 4 + 1/2" x 1	1/4" x 6 - 3/8" x 6
Dimensions (H x L x D)	m	800 x 850 x 298	800 x 850 x 298	800 x 950 x 370	1,450 x 855 x 308
Weight	kg	55	55	78	113
Cooling sound pressure level (night mode)	dB(A)	53 (45)	53 (45)	55(46)	55(48)
Heating sound pressure level (night mode)	dB(A)	56 (48)	56 (48)	58(52)	56(48)
Sound power level at nominal output (Cool. / Heat.)	dB(A)	65	68	68	68
Air flow rate (Cool. / Heat.)	m³ / h	2.700 / 2.700	2.700 / 2.700	n.d.	n.d.
No. of connectible indoor units (max - min)		3 - 2	4 - 2	5 - 2	6 - 4

* data not required by ErP lot 10 for this capacity



Multi Combinations

RAM 36NP2A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		NOMINAL POWER (kW) (min-max)	OUTDOOR UNIT			EER	NOMINAL POWER (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
			TOTAL	INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230V					230V	
ONE UNIT	1.20	1.20 (1.00 - 2.00)	1.20	370 (200 - 480)	1.62	3.24	1.80 (1.10 - 3.20)	1.80	495 (200 - 650)	2.17	3.64
	1.80	1.80 (1.00 - 2.50)	1.80	560 (200 - 750)	2.46	3.21	2.50 (1.10 - 3.20)	2.50	690 (200 - 970)	3.03	3.62
	2.50	2.50 (1.00 - 3.10)	2.50	780 (200 - 880)	3.40	3.21	3.40 (1.10 - 4.40)	3.40	870 (200 - 1,120)	3.80	3.91
	3.50	3.50 (1.00 - 4.00)	3.50	1,090 (200 - 1,300)	4.80	3.21	4.20 (1.10 - 5.00)	4.80	1,080 (200 - 1,300)	4.70	4.44
TWO UNITS	1.20 + 1.20	1.20 + 1.20 (1.50 - 2.80)	2.40	650 (200 - 780)	2.90	3.69	1.80 + 1.80 (1.50 - 4.20)	3.60	850 (200 - 950)	3.70	4.24
	1.20 + 1.80	1.20 + 1.80 (1.50 - 3.50)	3.00	810 (200 - 930)	3.60	3.70	1.80 + 2.50 (1.50 - 5.00)	4.30	1,020 (200 - 1,250)	4.50	4.22
	1.20 + 2.50	1.17 + 2.43 (1.50 - 4.00)	3.60	968 (200 - 1,050)	4.30	3.72	1.64 + 3.56 (1.50 - 5.50)	5.20	1,250 (200 - 1,500)	5.50	4.16
	1.20 + 3.50	0.92 + 2.68 (1.50 - 4.00)	3.60	968 (200 - 1,050)	4.30	3.72	1.42 + 3.78 (1.50 - 5.50)	5.20	1,250 (200 - 1,500)	5.50	4.16
	1.80 + 1.80	1.80 + 1.80 (1.50 - 4.00)	3.60	970 (200 - 1,050)	4.30	3.71	2.50 + 2.50 (1.50 - 5.50)	5.00	1,200 (200 - 1,500)	5.30	4.17
	1.80 + 2.50	1.51 + 2.09 (1.50 - 4.00)	3.60	970 (200 - 1,050)	4.30	3.71	2.03 + 3.17 (1.50 - 5.50)	5.20	1,250 (200 - 1,500)	5.50	4.16
	1.80 + 3.50	1.22 + 2.38 (1.50 - 4.00)	3.60	970 (200 - 1,050)	4.30	3.71	1.78 + 3.42 (1.50 - 5.50)	5.20	1,250 (200 - 1,500)	5.50	4.16
	2.50 + 2.50	1.80 + 1.80 (1.50 - 4.00)	3.60	970 (200 - 1,050)	4.30	3.71	2.60 + 2.60 (1.50 - 5.50)	5.20	1,250 (200 - 1,500)	5.50	4.16
	2.50 + 3.50	1.50 + 2.10 (1.50 - 4.00)	3.60	970 (200 - 1,050)	4.30	3.71	2.33 + 2.87 (1.50 - 5.50)	5.20	1,250 (200 - 1,500)	5.50	4.16

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two indoor units are connected.
- * The total nominal cooling capacity must not exceed 6.0 kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



RAM 53NP2A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	OUTDOOR UNIT			EER	INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
			TOTAL	INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230V					230V	
ONE UNIT	1.20	1.20 (1.00 - 1.60)	1.20	370 (200 - 480)	1.60	3.24	1.80 (1.10 - 2.20)	1.80	495 (200 - 650)	2.20	3.64
	1.80	1.80 (1.00 - 2.00)	1.80	495 (200 - 750)	2.20	3.64	2.50 (1.10 - 3.20)	2.50	690 (200 - 1,050)	3.00	3.62
	2.50	2.50 (1.00 - 2.80)	2.50	700 (200 - 980)	3.10	3.57	3.90 (1.10 - 4.70)	3.90	1,060 (200 - 1,380)	4.70	3.68
	3.50	3.50 (1.00 - 3.90)	3.50	1,030 (200 - 1,280)	4.50	3.40	4.80 (1.10 - 5.80)	4.80	1,320 (200 - 1,870)	5.80	3.64
	5.00	5.00 (1.00 - 5.50)	5.00	1,510 (200 - 1,660)	6.60	3.31	6.50 (1.10 - 7.20)	6.50	1,800 (200 - 2,010)	7.90	3.61
TWO UNITS	1.20 + 1.20	1.20 + 1.20 (1.50 - 2.80)	2.40	690 (200 - 980)	3.00	3.48	1.80 + 1.80 (1.50 - 4.20)	3.60	950 (200 - 1,100)	4.20	3.79
	1.20 + 1.80	1.20 + 1.80 (1.50 - 3.50)	3.00	920 (200 - 1,000)	4.00	3.26	1.80 + 2.50 (1.50 - 5.20)	4.30	1,100 (200 - 1,300)	4.80	3.91
	1.20 + 2.50	1.20 + 2.50 (1.50 - 4.00)	3.70	1,030 (200 - 1,300)	4.50	3.59	1.80 + 3.90 (1.50 - 6.40)	5.70	1,450 (200 - 1,780)	6.40	3.93
	1.20 + 3.50	1.20 + 3.50 (1.50 - 5.20)	4.70	1,390 (200 - 1,450)	6.10	3.80	1.80 + 4.80 (1.50 - 7.20)	6.60	1,660 (200 - 2,010)	7.30	3.98
	1.20 + 5.00	1.00 + 4.27 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	1.47 + 5.33 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80
	1.80 + 1.80	1.80 + 1.80 (1.50 - 4.00)	3.60	1,015 (200 - 1,300)	4.50	3.55	2.50 + 2.50 (1.50 - 5.20)	5.00	1,290 (200 - 1,550)	5.70	3.88
	1.80 + 2.50	1.80 + 2.50 (1.50 - 4.60)	4.30	1,167 (200 - 1,450)	5.10	3.68	2.50 + 3.90 (1.50 - 6.30)	6.40	1,700 (200 - 1,920)	7.50	3.76
	1.80 + 3.50	1.80 + 3.50 (1.50 - 5.60)	5.30	1,500 (200 - 1,660)	6.60	3.53	2.31 + 4.49 (1.50 - 7.20)	6.80	1,850 (200 - 2,010)	8.10	3.68
	1.80 + 5.00	1.40 + 3.90 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	1.80 + 5.00 (1.50 - 7.20)	6.80	1,820 (200 - 2,010)	8.00	3.74
	2.50 + 2.50	2.50 + 2.50 (1.50 - 5.60)	5.00	1,472 (200 - 1,660)	6.50	3.40	3.40 + 3.40 (1.50 - 7.20)	6.80	1,885 (200 - 2,010)	8.30	3.61
	2.50 + 3.50	2.21 + 3.09 (1.50 - 5.70)	5.30	1,528 (200 - 1,660)	6.70	3.47	2.83 + 3.97 (1.50 - 7.20)	6.80	1,820 (200 - 2,010)	8.00	3.74
	3.50 + 3.50	2.65 + 2.65 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	3.40 + 3.40 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80
	2.50 + 5.00	1.77 + 3.53 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	2.27 + 4.53 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80
	3.50 + 5.00	2.18 + 3.12 (1.50 - 6.60)	5.30	1,528 (200 - 1,660)	6.70	3.47	2.80 + 4.00 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two indoor units are connected.
- * The total nominal cooling capacity must not exceed 8.5 kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



Multi Split

Multi Combinations

RAM 53NP3A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
				INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230 V					230 V	
ONE UNIT	1.20	1.20 (1.00 - 1.60)	1.20	370 (200 - 480)	1.60	3.24	1.80 (1.10 - 2.20)	1.80	4.95 (200 - 650)	2.20	3.64
	1.80	1.80 (1.00 - 2.00)	1.80	495 (200 - 750)	2.20	3.64	2.50 (1.10 - 3.20)	2.50	690 (200 - 1,050)	3.00	3.62
	2.50	2.50 (1.00 - 2.80)	2.50	700 (200 - 980)	3.10	3.57	3.90 (1.10 - 4.70)	3.90	1,060 (200 - 1,380)	4.70	3.68
	3.50	3.50 (1.00 - 3.90)	3.50	1,030 (200 - 1,280)	4.50	3.40	4.80 (1.10 - 5.80)	4.80	1,320 (200 - 1,870)	5.80	3.64
	5.00	5.00 (1.00 - 5.50)	5.00	1,510 (200 - 1,660)	6.60	3.31	6.50 (1.10 - 7.20)	6.50	1,800 (200 - 2,010)	7.90	3.61
TWO UNITS	1.20 + 1.20	1.20 + 1.20 (1.50 - 2.80)	2.40	690 (200 - 980)	3.00	3.48	1.80 + 1.80 (1.50 - 4.20)	3.60	950 (200 - 1,100)	4.20	3.79
	1.20 + 1.80	1.20 + 1.80 (1.50 - 3.50)	3.00	920 (200 - 1,000)	4.00	3.26	1.80 + 2.50 (1.50 - 5.20)	4.30	1,100 (200 - 1,300)	4.80	3.91
	1.20 + 2.50	1.20 + 2.50 (1.50 - 4.00)	3.70	1,030 (200 - 1,300)	4.50	3.59	1.80 + 3.90 (1.50 - 6.40)	5.70	1,450 (200 - 1,780)	5.40	3.93
	1.20 + 3.50	1.20 + 3.50 (1.50 - 5.20)	4.70	1,390 (200 - 1,450)	6.10	3.38	1.80 + 4.80 (1.50 - 7.20)	6.60	1,660 (200 - 2,010)	7.30	3.98
	1.20 + 5.00	1.03 + 4.27 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	1.47 + 5.33 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80
	1.80 + 1.80	1.80 + 1.80 (1.50 - 4.00)	3.60	1,015 (200 - 1,300)	4.50	3.55	2.50 + 2.50 (1.50 - 5.20)	5.00	1,290 (200 - 1,550)	5.70	3.88
	1.80 + 2.50	1.80 + 2.50 (1.50 - 4.60)	4.30	1,167 (200 - 1,450)	5.10	3.68	2.50 + 3.90 (1.50 - 6.30)	6.40	1,700 (200 - 1,920)	7.50	3.76
	1.80 + 3.50	1.80 + 3.50 (1.50 - 5.60)	5.30	1,500 (200 - 1,660)	6.60	3.53	2.31 + 4.49 (1.50 - 7.20)	6.80	1,850 (200 - 2,010)	8.10	3.68
	1.80 + 5.00	1.40 + 3.90 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	1.80 + 5.00 (1.50 - 7.20)	6.80	1,820 (200 - 2,010)	8.00	3.74
	2.50 + 2.50	2.50 + 2.50 (1.50 - 5.60)	5.00	1,472 (200 - 1,660)	6.50	3.40	3.40 + 3.40 (1.50 - 7.20)	6.80	1,885 (200 - 2,010)	8.30	3.61
	2.50 + 3.50	2.21 + 3.09 (1.50 - 5.70)	5.30	1,528 (200 - 1,660)	6.70	3.47	2.83 + 3.97 (1.50 - 7.20)	6.80	1,820 (200 - 2,010)	8.00	3.74
	3.50 + 3.50	2.65 + 2.65 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	3.40 + 3.40 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80
	2.50 + 5.00	1.77 + 3.53 (1.50 - 5.90)	5.30	1,528 (200 - 1,660)	6.70	3.47	2.27 + 4.53 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80
	3.50 + 5.00	2.18 + 3.12 (1.50 - 6.60)	5.30	1,528 (200 - 1,660)	6.70	3.47	2.80 + 4.00 (1.50 - 7.20)	6.80	1,790 (200 - 2,010)	7.90	3.80
THREE UNITS	1.20 + 1.20 + 1.20	1.20 + 1.20 + 1.20 (1.50 - 6.00)	3.60	1,080 (200 - 1,680)	4.70	3.33	1.80 + 1.80 + 1.80 (1.50 - 6.20)	5.40	1,380 (200 - 1,550)	5.90	3.91
	1.20 + 1.20 + 1.80	1.20 + 1.20 + 1.80 (1.50 - 6.00)	4.20	1,250 (200 - 1,680)	5.50	3.36	1.80 + 1.80 + 2.50 (1.50 - 6.60)	6.10	1,580 (200 - 1,760)	6.80	3.86
	1.20 + 1.20 + 2.50	1.20 + 1.20 + 2.50 (1.50 - 6.00)	4.90	1,450 (200 - 1,660)	6.40	3.38	1.63 + 1.63 + 3.54 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 1.20 + 3.50	1.08 + 1.08 + 3.14 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.46 + 1.46 + 3.89 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 1.20 + 5.00	0.86 + 0.86 + 3.58 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.21 + 1.21 + 4.38 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 1.80 + 1.80	1.20 + 1.80 + 1.80 (1.50 - 6.00)	4.80	1,420 (200 - 1,680)	6.20	3.38	1.80 + 2.50 + 2.50 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 1.80 + 2.50	1.16 + 1.73 + 2.41 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.49 + 2.07 + 3.23 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 1.80 + 3.50	0.98 + 1.47 + 2.85 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.35 + 1.87 + 3.59 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 1.80 + 5.00	0.80 + 1.19 + 3.31 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.13 + 1.57 + 4.09 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 2.50 + 2.50	1.03 + 2.14 + 2.14 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.28 + 2.76 + 2.76 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 2.50 + 3.50	0.88 + 1.84 + 2.58 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.17 + 2.53 + 3.11 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.20 + 3.50 + 3.50	0.78 + 2.26 + 2.26 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.07 + 2.86 + 2.86 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.80 + 1.80 + 1.80	1.77 + 1.77 + 1.77 (1.50 - 6.00)	5.30	1,555 (200 - 1,680)	6.80	3.41	2.27 + 2.27 + 2.27 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.80 + 1.80 + 2.50	1.56 + 1.56 + 2.17 (1.50 - 6.40)	5.30	1,555 (200 - 1,680)	6.80	3.41	2.01 + 2.01 + 2.79 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.80 + 1.8 + 3.50	1.34 + 1.34 + 2.61 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.72 + 1.72 + 3.35 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.80 + 1.80 + 5.00	1.11 + 1.11 + 3.08 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.42 + 1.42 + 3.95 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.80 + 2.50 + 2.50	1.40 + 1.95 + 1.95 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.80 + 2.50 + 2.50 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.80 + 2.50 + 3.50	1.22 + 1.70 + 2.38 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.57 + 2.18 + 3.05 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	1.80 + 3.50 + 3.50	1.08 + 2.11 + 2.11 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	1.40 + 2.70 + 2.70 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
	2.50 + 2.50 + 2.50	1.77 + 1.77 + 1.77 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.80	3.41	2.27 + 2.27 + 2.27 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03
2.50 + 2.50 + 3.50	1.56 + 1.56 + 2.18 (1.50 - 6.60)	5.30	1,555 (200 - 1,680)	6.83	3.41	2.00 + 2.00 + 2.80 (1.50 - 7.20)	6.80	1,687 (200 - 1,860)	7.30	4.03	

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two or three indoor units are connected.
- * The indication "two units" shows operation data of two indoor units when two or three indoor units are connected.
- * The total nominal cooling capacity must not exceed 8.5 kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



RAM-68NP3A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	OUTDOOR UNIT			EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP
			TOT.	INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230 V					230 V	
ONE UNIT	1.20	1.20 (1.00 - 1.60)	1.20	370 (200 - 480)	1.60	3.24	1.80 (1.10 - 2.20)	1.80	560 (320 - 850)	2.50	3.21
	1.80	1.80 (1.50 - 2.00)	1.80	450 (280 - 500)	2.00	4.00	2.50 (1.80 - 3.50)	2.50	850 (320 - 1,130)	3.70	2.94
	2.50	2.50 (1.50 - 2.80)	2.50	650 (280 - 720)	2.90	3.85	3.40 (1.80 - 4.70)	3.40	1,130 (320 - 1,480)	5.00	3.01
	3.50	3.50 (1.50 - 3.90)	3.50	1,030 (280 - 1,130)	4.50	3.40	4.30 (1.80 - 5.80)	4.30	1,520 (320 - 1,950)	6.70	2.83
	5.00	5.00 (1.50 - 5.60)	5.00	1,640 (280 - 1,800)	7.20	3.05	6.50 (1.80 - 7.20)	6.50	2,400 (320 - 2,530)	10.50	2.71
TWO UNITS	1.20 + 1.20	1.20 + 1.20 (1.50 - 2.80)	2.40	690 (380 - 980)	3.00	3.48	1.80 + 1.80 (2.20 - 4.70)	3.60	950 (200 - 1,100)	4.20	3.79
	1.20 + 1.80	1.20 + 1.80 (1.50 - 3.50)	3.00	920 (380 - 1,000)	4.00	3.26	1.80 + 2.50 (2.20 - 5.20)	4.30	1,100 (200 - 1,300)	4.80	3.81
	1.20 + 2.50	1.20 + 2.50 (1.50 - 4.00)	3.70	1,030 (380 - 1,300)	4.50	3.59	1.80 + 3.40 (2.20 - 6.40)	5.20	1,450 (200 - 1,780)	6.40	3.59
	1.20 + 3.50	1.20 + 3.50 (1.50 - 5.20)	4.70	1,390 (380 - 1,450)	6.10	3.38	1.80 + 4.30 (2.20 - 7.20)	6.10	1,660 (200 - 2,010)	7.30	3.67
	1.20 + 5.00	1.20 + 5.00 (1.50 - 5.90)	6.20	1,850 (380 - 2,380)	8.10	3.35	1.80 + 6.50 (2.20 - 6.40)	8.30	2,470 (390 - 3,120)	10.80	3.36
	1.80 + 1.80	1.80 + 1.80 (2.00 - 4.00)	3.60	830 (380 - 1,020)	3.60	4.34	2.50 + 2.50 (2.20 - 6.40)	5.00	1,380 (390 - 2,750)	6.10	3.62
	1.80 + 2.50	1.80 + 2.50 (2.00 - 4.70)	4.30	1,120 (380 - 1,360)	4.90	3.84	2.50 + 3.40 (2.20 - 7.20)	5.90	1,680 (390 - 3,000)	7.40	3.51
	1.80 + 3.50	1.80 + 3.50 (2.00 - 5.80)	5.30	1,600 (380 - 1,950)	7.00	3.31	2.50 + 4.30 (2.20 - 7.20)	6.80	2,030 (390 - 3,120)	8.90	3.35
	1.80 + 5.00	1.80 + 5.00 (2.00 - 7.10)	6.80	2,420 (380 - 2,820)	10.60	2.81	2.36 + 6.14 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44
	2.50 + 2.50	2.50 + 2.50 (2.00 - 5.50)	5.00	1,410 (380 - 1,720)	6.20	3.55	3.60 + 3.60 (2.20 - 9.50)	7.20	2,070 (390 - 3,120)	9.10	3.48
	2.50 + 3.50	2.50 + 3.50 (2.00 - 6.60)	6.00	1,950 (380 - 2,380)	8.60	3.08	3.60 + 4.30 (2.20 - 9.50)	7.90	2,420 (390 - 3,120)	10.60	3.26
	2.50 + 5.00	2.40 + 4.70 (2.00 - 7.50)	6.80	2,420 (380 - 2,980)	10.60	2.81	2.92 + 5.58 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44
	3.50 + 3.50	3.50 + 3.50 (2.00 - 7.40)	6.80	2,555 (380 - 2,940)	11.20	2.66	4.25 + 4.25 (2.20 - 9.50)	8.50	2,640 (390 - 3,120)	11.60	3.22
	3.50 + 5.00	2.90 + 4.20 (2.00 - 7.50)	6.80	2,420 (380 - 2,890)	10.60	2.81	3.38 + 5.12 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44
	5.00 + 5.00	3.55 + 3.55 (2.00 - 8.00)	6.80	2,420 (380 - 3,170)	10.60	2.81	4.25 + 4.25 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two or three indoor units are connected.
- * The indication "two units" shows operation data of two indoor units when two or three indoor units are connected.
- * The total nominal cooling capacity must not exceed 11 kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



Multi Split

Multi Combinations

RAM-68NP3A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	OUTDOOR UNIT			EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP
			TOT.	INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230 V					230 V	
THREE UNITS	1.20 + 1.20 + 1.20	1.20 + 1.20 + 1.20 (2.20 - 4.00)	3.60	1,080 (420 - 1,680)	4.70	3.33	1.80 + 1.80 + 1.80 (2.40 - 6.20)	5.40	1,490 (430 - 1,800)	6.50	3.62
	1.20 + 1.20 + 1.80	1.20 + 1.20 + 1.80 (2.20 - 4.70)	4.20	1,250 (420 - 1,880)	5.50	3.36	1.80 + 1.80 + 2.50 (2.40 - 6.60)	6.10	1,680 (430 - 2,100)	7.40	3.63
	1.20 + 1.20 + 2.50	1.20 + 1.20 + 2.50 (2.20 - 4.70)	4.90	1,450 (420 - 2,280)	6.40	3.38	1.80 + 1.80 + 3.40 (2.20 - 9.30)	7.00	1,910 (430 - 2,200)	8.40	3.66
	1.20 + 1.20 + 3.50	1.20 + 1.20 + 3.50 (2.20 - 6.60)	5.90	1,590 (420 - 2,480)	7.00	3.71	1.80 + 1.80 + 4.30 (2.40 - 9.50)	7.90	2,130 (430 - 2,500)	9.40	3.71
	1.20 + 1.20 + 5.00	1.10 + 1.10 + 5.00 (2.20 - 7.80)	6.80	2,120 (420 - 2,890)	9.30	3.21	1.51 + 1.51 + 5.47 (2.40 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 1.80 + 1.80	1.20 + 1.80 + 1.80 (2.20 - 5.90)	4.80	1,450 (420 - 2,280)	6.40	3.31	1.80 + 2.50 + 2.50 (2.20 - 9.30)	6.80	1,860 (430 - 2,400)	8.20	3.66
	1.20 + 1.80 + 2.50	1.20 + 1.80 + 2.50 (2.20 - 5.90)	5.50	1,590 (420 - 2,480)	7.00	3.46	1.80 + 2.50 + 3.40 (2.40 - 9.50)	7.70	2,110 (430 - 2,600)	9.30	3.65
	1.20 + 1.80 + 3.50	1.20 + 1.80 + 3.50 (2.20 - 6.60)	6.50	1,750 (420 - 2,480)	7.70	3.71	1.78 + 2.47 + 4.25 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.20 + 1.80 + 5.00	1.02 + 1.53 + 4.25 (2.20 - 8.00)	6.80	2,120 (420 - 2,890)	9.30	3.21	1.42 + 1.97 + 5.12 (2.40 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 2.50 + 2.50	1.20 + 2.50 + 2.50 (1.50 - 6.60)	6.20	2,590 (420 - 2,480)	7.00	3.90	1.78 + 3.36 + 3.36 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.20 + 2.50 + 3.50	1.13 + 2.36 + 3.31 (2.20 - 7.80)	6.80	2,120 (420 - 2,890)	9.30	3.21	1.61 + 3.04 + 3.85 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.20 + 2.50 + 5.00	0.94 + 1.95 + 3.91 (2.20 - 8.00)	6.80	2,085 (420 - 2,960)	9.20	3.26	1.31 + 2.47 + 4.72 (2.40 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 3.50 + 3.50	1.00 + 2.90 + 2.90 (2.20 - 8.00)	6.80	2,120 (420 - 2,890)	9.30	3.21	1.47 + 3.51 + 3.51 (2.40 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 3.50 + 5.00	0.84 + 2.45 + 3.51 (2.20 - 8.00)	6.80	2,085 (420 - 2,960)	9.20	3.26	1.21 + 2.90 + 4.38 (2.40 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 5.00 + 5.00	0.73 + 3.04 + 3.04 (2.20 - 8.00)	6.80	2,120 (420 - 2,960)	9.30	3.21	1.03 + 3.73 + 3.73 (2.40 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.80 + 1.80 + 1.80	1.80 + 1.80 + 1.80 (2.20 - 5.90)	5.40	1,250 (420 - 2,190)	5.50	4.32	2.50 + 2.50 + 2.50 (2.40 - 9.50)	7.50	2,050 (430 - 2,600)	9.00	3.66
	1.80 + 1.80 + 2.50	1.80 + 1.80 + 2.50 (2.20 - 6.70)	6.10	1,590 (420 - 2,480)	7.00	3.84	2.50 + 2.50 + 3.40 (2.40 - 9.50)	8.40	2,290 (430 - 2,600)	10.10	3.67
	1.80 + 1.80 + 3.50	1.72 + 1.72 + 3.35 (2.20 - 7.80)	6.80	2,120 (420 - 2,890)	9.30	3.21	2.28 + 2.28 + 3.93 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.80 + 1.80 + 5.00	1.42 + 1.42 + 3.95 (2.20 - 8.00)	6.80	2,085 (420 - 2,960)	9.20	3.26	1.85 + 1.85 + 4.80 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	1.80 + 2.50 + 2.50	1.80 + 2.50 + 2.50 (2.20 - 7.50)	6.80	2,040 (420 - 2,780)	9.00	3.33	2.28 + 3.11 + 3.11 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.80 + 2.50 + 3.50	1.57 + 2.18 + 3.05 (2.20 - 8.00)	6.80	2,120 (420 - 2,960)	9.30	3.21	2.08 + 2.83 + 3.58 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.80 + 2.50 + 5.00	1.32 + 1.83 + 3.66 (2.20 - 8.00)	6.80	2,085 (440 - 2,770)	9.20	3.26	1.71 + 2.33 + 4.46 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	1.80 + 3.50 + 3.50	1.39 + 2.70 + 2.70 (2.20 - 8.00)	6.80	2,120 (420 - 2,960)	9.30	3.21	1.91 + 3.29 + 3.29 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.80 + 3.50 + 5.00	1.19 + 2.31 + 3.30 (2.20 - 8.00)	6.80	2,085 (420 - 2,960)	9.20	3.26	1.60 + 2.75 + 4.15 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	2.50 + 2.50 + 2.50	2.27 + 2.27 + 2.27 (2.20 - 7.80)	6.80	2,120 (420 - 2,890)	9.30	3.21	2.83 + 2.83 + 2.83 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	2.50 + 2.50 + 3.50	2.00 + 2.00 + 2.80 (2.20 - 8.00)	6.80	2,120 (420 - 2,960)	9.30	3.21	2.60 + 2.60 + 3.29 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	2.50 + 2.50 + 5.00	1.70 + 1.70 + 3.40 (2.20 - 8.00)	6.80	2,085 (420 - 2,960)	9.20	3.26	2.17 + 2.17 + 4.15 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	2.50 + 3.50 + 3.50	1.79 + 2.51 + 2.51 (2.20 - 8.00)	6.80	2,120 (420 - 2,960)	9.30	3.21	2.41 + 3.05 + 3.05 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	2.50 + 3.50 + 5.00	1.55 + 2.16 + 3.09 (2.20 - 8.00)	6.80	2,090 (420 - 2,960)	9.18	3.25	2.04 + 2.57 + 3.89 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	3.50 + 3.50 + 3.50	2.27 + 2.27 + 2.27 (2.20 - 8.00)	6.80	2,120 (420 - 2,960)	9.31	3.21	2.83 + 2.83 + 2.83 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two or three indoor units are connected.
- * The indication "two units" shows operation data of two indoor units when two or three indoor units are connected.
- * The total nominal cooling capacity must not exceed 11 kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



RAM 70NP4A

POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	OUTDOOR UNIT			EER	INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
			TOTAL	INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230 V					230 V	
ONE UNIT	1.20	1.20 (1.00 - 1.60)	1.20	370 (200 - 480)	1.60		3.24	1.80 (1.10 - 2.20)	1.80	560 (320 - 850)	
	1.80	1.80 (1.50 - 2.00)	1.80	450 (280 - 500)	2.00	4.00	2.50 (1.80 - 3.50)	2.50	850 (320 - 1,130)	3.70	2.94
	2.50	2.50 (1.50 - 2.80)	2.50	650 (280 - 720)	2.90	3.85	3.40 (1.80 - 4.70)	3.40	1,130 (320 - 1,480)	5.00	3.01
	3.50	3.50 (1.50 - 3.90)	3.50	1,030 (280 - 1,130)	4.50	3.40	4.30 (1.80 - 5.80)	4.30	1,520 (320 - 1,950)	6.70	2.83
	5.00	5.00 (1.50 - 5.60)	5.00	1,640 (280 - 1,800)	7.20	3.05	6.50 (1.80 - 7.20)	6.50	2,400 (320 - 2,530)	10.50	2.71
TWO UNITS	1.20 + 1.20	1.20 + 1.20 (1.50 - 2.80)	2.40	690 (380 - 980)	3.00	3.48	1.80 + 1.80 (2.20 - 4.70)	3.60	950 (200 - 1,100)	4.20	3.79
	1.20 + 1.80	1.20 + 1.80 (1.50 - 3.50)	3.00	920 (380 - 1,000)	4.00	3.26	1.80 + 2.50 (2.20 - 5.20)	4.30	1,100 (200 - 1,300)	4.80	3.91
	1.20 + 2.50	1.20 + 2.50 (1.50 - 4.00)	3.70	1,030 (380 - 1,300)	4.50	3.59	1.80 + 3.40 (2.20 - 6.40)	5.20	1,450 (200 - 1,780)	6.40	3.59
	1.20 + 3.50	1.20 + 3.50 (1.50 - 5.20)	4.70	1,390 (380 - 1,450)	6.10	3.38	1.80 + 4.30 (2.20 - 7.20)	6.10	1,660 (200 - 2,010)	7.30	3.67
	1.20 + 5.00	1.20 + 5.00 (1.50 - 5.90)	6.20	1,850 (380 - 2,380)	8.10	3.35	1.80 + 6.50 (2.20 - 7.20)	8.30	2,470 (390 - 3,120)	10.80	3.36
	1.80 + 1.80	1.80 + 1.80 (2.00 - 4.00)	3.60	830 (380 - 1,020)	3.60	4.34	2.50 + 2.50 (2.20 - 6.40)	5.00	1,380 (390 - 2,750)	6.10	3.62
	1.80 + 2.50	1.80 + 2.50 (2.00 - 4.70)	4.30	1,120 (380 - 1,360)	4.90	3.84	2.50 + 3.40 (2.20 - 7.20)	5.90	1,680 (390 - 3,000)	7.40	3.51
	1.80 + 3.50	1.80 + 3.50 (2.00 - 5.80)	5.30	1,600 (380 - 1,950)	7.00	3.31	2.50 + 4.30 (2.20 - 7.20)	6.80	2,030 (390 - 3,120)	8.90	3.35
	1.80 + 5.00	1.80 + 5.00 (2.00 - 7.10)	6.80	2,420 (380 - 2,820)	10.60	2.81	2.36 + 6.14 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44
	2.50 + 2.50	2.50 + 2.50 (2.00 - 5.50)	5.00	1,410 (380 - 1,720)	6.20	3.55	3.60 + 3.60 (2.20 - 9.50)	7.20	2,070 (390 - 3,120)	9.10	3.48
	2.50 + 3.50	2.50 + 3.50 (2.00 - 6.60)	6.00	1,950 (380 - 2,380)	8.60	3.08	3.60 + 4.30 (2.20 - 9.50)	7.90	2,420 (390 - 3,120)	10.60	3.26
	2.50 + 5.00	2.33 + 4.67 (2.00 - 7.50)	7.00	2,490 (380 - 2,980)	10.90	2.81	2.92 + 5.58 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44
	3.50 + 3.50	3.50 + 3.50 (2.00 - 7.40)	7.00	2,630 (380 - 2,940)	11.60	2.66	4.25 + 4.25 (2.20 - 9.50)	8.50	2,640 (390 - 3,120)	11.60	3.22
	3.50 + 5.00	2.88 + 4.12 (2.00 - 7.50)	7.00	2,490 (380 - 2,890)	10.90	2.81	3.38 + 5.12 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44
	5.00 + 5.00	3.50 + 3.50 (2.00 - 8.00)	7.00	2,490 (380 - 3,170)	10.90	2.81	4.25 + 4.25 (2.20 - 9.50)	8.50	2,470 (390 - 3,120)	10.80	3.44



Multi Combinations

RAM 70NP4A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	OUTDOOR UNIT			EER	INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
			TOTAL	INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230 V					230 V	
THREE UNITS	1.20 + 1.20 + 1.20	1.20 + 1.20 + 1.20 (2.20 - 4.00)	3.60	1,080 (420 - 1,680)	4.70	3.33	1.80 + 1.80 + 1.80 (2.40 - 6.20)	5.40	1,490 (430 - 1,800)	6.50	3.62
	1.20 + 1.20 + 1.80	1.20 + 1.20 + 1.80 (2.20 - 4.70)	4.20	1,250 (420 - 1,880)	5.50	3.36	1.80 + 1.80 + 2.50 (2.40 - 6.60)	6.10	1,680 (430 - 2,100)	7.40	3.63
	1.20 + 1.20 + 2.50	1.20 + 1.20 + 2.50 (2.20 - 5.80)	4.90	1,450 (420 - 2,280)	6.40	3.38	1.80 + 1.80 + 3.40 (2.20 - 9.30)	7.00	1,910 (430 - 2,200)	8.40	3.66
	1.20 + 1.20 + 3.50	1.20 + 1.20 + 3.50 (2.20 - 6.60)	5.90	1,590 (420 - 2,480)	7.00	3.71	1.80 + 1.80 + 4.30 (2.40 - 9.50)	7.90	2,130 (430 - 2,500)	9.40	3.71
	1.20 + 1.20 + 5.00	1.14 + 1.14 + 4.73 (2.20 - 7.80)	7.00	2,180 (420 - 2,890)	9.60	3.21	1.51 + 1.51 + 5.47 (2.40 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 1.80 + 1.80	1.20 + 1.80 + 1.80 (2.20 - 5.90)	4.80	1,450 (420 - 2,280)	6.40	3.31	1.80 + 2.50 + 2.50 (2.20 - 9.30)	6.80	1,860 (430 - 2,400)	8.20	3.66
	1.20 + 1.80 + 2.50	1.20 + 1.80 + 2.50 (2.20 - 5.90)	5.50	1,590 (420 - 2,480)	7.00	3.47	1.80 + 2.50 + 3.40 (2.20 - 9.50)	7.70	2,110 (430 - 2,600)	8.30	3.65
	1.20 + 1.80 + 3.50	1.20 + 1.80 + 3.50 (2.20 - 6.60)	6.50	1,750 (420 - 2,480)	7.70	3.71	1.78 + 2.47 + 4.25 (2.20 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.20 + 1.80 + 5.00	1.05 + 1.58 + 4.38 (2.20 - 8.00)	7.00	2,180 (420 - 2,890)	9.60	3.21	1.42 + 1.97 + 5.12 (2.20 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 2.50 + 2.50	1.20 + 2.50 + 2.50 (1.50 - 6.60)	6.20	1,590 (420 - 2,480)	7.00	3.90	1.78 + 3.36 + 3.36 (2.20 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.20 + 2.50 + 3.50	1.17 + 2.43 + 3.40 (2.20 - 7.80)	7.00	2,180 (420 - 2,890)	9.60	3.21	1.61 + 3.04 + 3.85 (2.20 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.20 + 2.50 + 5.00	0.97 + 2.01 + 4.02 (2.20 - 8.00)	7.00	2,150 (420 - 2,960)	9.40	3.26	1.31 + 2.47 + 4.72 (2.20 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 3.50 + 3.50	1.02 + 2.99 + 2.99 (2.20 - 8.00)	7.00	2,180 (420 - 2,890)	9.60	3.21	1.47 + 3.51 + 3.51 (2.20 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 3.50 + 5.00	1.87 + 2.53 + 3.61 (2.20 - 8.00)	7.00	2,150 (420 - 2,960)	9.40	3.26	1.21 + 2.90 + 4.38 (2.20 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.20 + 5.00 + 5.00	0.75 + 3.13 + 3.13 (2.20 - 8.00)	7.00	2,180 (420 - 2,960)	9.60	3.21	1.03 + 3.73 + 3.73 (2.20 - 9.50)	8.50	2,260 (430 - 2,600)	9.90	3.76
	1.80 + 1.80 + 1.80	1.80 + 1.80 + 1.80 (2.20 - 5.90)	5.40	1,250 (420 - 2,190)	5.50	4.32	2.50 + 2.50 + 2.50 (2.40 - 9.50)	7.50	2,050 (430 - 2,600)	9.00	3.66
	1.80 + 1.80 + 2.50	1.80 + 1.80 + 2.50 (2.20 - 6.70)	6.10	1,590 (420 - 2,480)	7.00	3.84	2.50 + 2.50 + 3.40 (2.40 - 9.50)	8.40	2,290 (430 - 2,600)	10.10	3.67
	1.80 + 1.80 + 3.50	1.77 + 1.77 + 3.45 (2.20 - 7.80)	7.00	2,180 (420 - 2,890)	9.60	3.21	2.28 + 2.28 + 3.93 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.80 + 1.80 + 5.00	1.47 + 1.47 + 4.07 (2.20 - 8.00)	7.00	2,150 (420 - 2,960)	9.40	3.26	1.85 + 1.85 + 4.80 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	1.80 + 2.50 + 2.50	1.80 + 2.50 + 2.50 (2.20 - 7.50)	6.80	2,040 (420 - 2,780)	9.00	3.33	2.28 + 3.11 + 3.11 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.80 + 2.50 + 3.50	1.62 + 2.24 + 3.14 (2.20 - 8.00)	7.00	2,180 (420 - 2,960)	9.60	3.21	2.08 + 2.83 + 3.58 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	1.80 + 2.50 + 5.00	1.35 + 1.88 + 3.76 (2.20 - 8.00)	7.00	2,150 (440 - 2,770)	9.40	3.26	1.71 + 2.33 + 4.46 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	1.80 + 3.50 + 3.50	1.43 + 2.78 + 2.78 (2.20 - 8.00)	7.00	2,180 (420 - 2,960)	9.60	3.21	1.91 + 3.29 + 3.29 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.100	3.71
	1.80 + 3.50 + 5.00	1.22 + 2.38 + 3.40 (2.20 - 8.00)	7.00	2,150 (420 - 2,960)	9.40	3.26	1.60 + 2.75 + 4.15 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	2.50 + 2.50 + 2.50	2.33 + 2.33 + 2.33 (2.20 - 7.80)	7.00	2,180 (420 - 2,890)	9.60	3.21	2.83 + 2.83 + 2.83 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	2.50 + 2.50 + 3.50	2.06 + 2.06 + 2.88 (2.20 - 8.00)	7.00	2,180 (420 - 2,960)	9.60	3.21	2.60 + 2.60 + 3.29 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	2.50 + 2.50 + 5.00	1.75 + 1.75 + 3.50 (2.20 - 8.00)	7.00	2,150 (420 - 2,960)	9.40	3.26	2.17 + 2.17 + 4.15 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	2.50 + 3.50 + 3.50	1.84 + 2.58 + 2.58 (2.20 - 8.00)	7.00	2,180 (420 - 2,960)	9.60	3.21	2.41 + 3.05 + 3.05 (2.40 - 9.50)	8.50	2,290 (430 - 2,600)	10.10	3.71
	2.50 + 3.50 + 5.00	1.59 + 2.23 + 3.18 (2.20 - 8.00)	7.00	2,150 (420 - 2,960)	9.40	3.26	2.04 + 2.57 + 3.89 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73
	3.50 + 3.50 + 3.50	2.33 + 2.33 + 2.33 (2.20 - 8.00)	7.00	2,180 (420 - 2,960)	9.60	3.21	2.83 + 2.83 + 2.83 (2.40 - 9.50)	8.50	2,280 (430 - 2,600)	10.00	3.73



RAM 70NP4A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	OUTDOOR UNIT			EER	INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
			TOTAL	INPUT POWER (W)	CURRENT (A)				CURRENT (A)		
					230 V					230 V	
FOUR UNITS	1.20 + 1.20 + 1.20 + 1.20	1.20 + 1.20 + 1.20 + 1.20 (2.20 - 5.40)	4.80	1,420 (200-1,660)	6.20	3.38	1.80 + 1.80 + 1.80 + 1.80 (2.60 - 9.50)	7.20	1,950 (460-2,420)	8.60	3.69
	1.20 + 1.20 + 1.20 + 1.80	1.20 + 1.20 + 1.20 + 1.80 (2.20 - 5.90)	5.40	1,650 (420-2,010)	7.20	3.27	1.80 + 1.80 + 1.80 + 2.50 (2.60 - 9.50)	7.90	2,180 (460-2,520)	9.60	3.62
	1.20 + 1.20 + 1.20 + 2.50	1.20 + 1.20 + 1.20 + 2.50 (2.20 - 6.70)	6.10	1,890 (420-2,010)	8.30	3.23	1.74 + 1.74 + 1.74 + 3.28 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 1.20 + 3.50	1.18 + 1.18 + 1.18 + 3.45 (2.40 - 7.90)	7.00	2,110 (450-2,650)	9.30	3.32	1.58 + 1.58 + 1.58 + 3.77 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 1.20 + 5.00	0.98 + 0.98 + 0.98 + 4.07 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.29 + 1.29 + 1.29 + 4.64 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 1.80 + 1.80	1.20 + 1.20 + 1.80 + 1.80 (2.20 - 6.70)	6.00	1,850 (450-2,010)	8.10	3.24	1.78 + 1.78 + 2.47 + 2.47 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 1.80 + 2.50	1.20 + 1.20 + 1.80 + 2.50 (2.40 - 7.50)	6.70	2,010 (450-2,310)	8.80	3.33	1.61 + 1.61 + 2.24 + 3.04 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 1.80 + 3.50	1.09 + 1.09 + 1.64 + 3.18 (2.40 - 8.30)	7.00	2,110 (450-2,650)	9.30	3.32	1.47 + 1.47 + 2.04 + 3.51 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 1.80 + 5.00	0.91 + 0.91 + 1.37 + 3.80 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.21 + 1.21 + 1.69 + 4.38 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 2.50 + 2.50	1.14 + 1.14 + 2.36 + 2.36 (2.40 - 7.90)	7.00	2,110 (450-2,650)	9.30	3.32	1.47 + 1.47 + 2.78 + 2.78 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 2.50 + 3.50	1.00 + 1.00 + 2.08 + 2.92 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.35 + 1.35 + 2.56 + 3.23 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 2.50 + 5.00	0.85 + 0.85 + 1.77 + 3.54 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.13 + 1.13 + 2.14 + 4.09 (2.60 - 9.50)	8.50	2,180 (460-2,520)	9.60	3.90
	1.20 + 1.20 + 3.50 + 3.50	0.89 + 0.89 + 2.61 + 2.61 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.25 + 1.25 + 3.00 + 3.00 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.20 + 3.50 + 5.00	0.77 + 0.77 + 2.25 + 3.21 (2.40 - 8.80)	7.00	2,110 (450-3,020)	9.30	3.32	1.06 + 1.06 + 2.54 + 3.84 (2.60 - 9.50)	8.50	2,180 (460-2,520)	9.60	3.90
	1.20 + 1.80 + 1.80 + 1.80	1.20 + 1.80 + 1.80 + 1.80 (2.40 - 7.50)	6.60	2,010 (420-2,310)	8.80	3.28	1.65 + 2.28 + 2.28 + 2.28 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.80 + 1.80 + 2.50	1.15 + 1.73 + 1.73 + 2.40 (2.40 - 7.90)	7.00	2,110 (450-2,650)	9.30	3.32	1.50 + 2.08 + 2.08 + 2.83 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.80 + 1.80 + 3.50	1.01 + 1.52 + 1.52 + 2.95 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.38 + 1.91 + 1.91 + 3.29 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.80 + 1.80 + 5.00	0.86 + 1.29 + 1.29 + 3.57 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.15 + 1.60 + 1.60 + 4.15 (2.60 - 9.50)	8.50	2,180 (460-2,520)	9.60	3.90
	1.20 + 1.80 + 2.50 + 2.50	1.05 + 1.58 + 2.19 + 2.19 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.38 + 1.91 + 2.60 + 2.60 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.80 + 2.50 + 3.50	0.93 + 1.40 + 1.94 + 2.72 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.28 + 1.77 + 2.41 + 3.05 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 1.80 + 2.50 + 5.00	0.80 + 1.20 + 1.67 + 3.33 (2.40 - 8.80)	7.00	2,110 (450-3,020)	9.30	3.32	1.08 + 1.50 + 2.04 + 3.89 (2.60 - 9.50)	8.50	2,180 (460-2,520)	9.60	3.90
	1.20 + 1.80 + 3.50 + 3.50	0.84 + 1.26 + 2.45 + 2.45 (2.40 - 8.80)	7.00	2,110 (450-3,020)	9.30	3.32	1.19 + 1.65 + 2.83 + 2.83 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 2.50 + 2.50 + 2.50	0.97 + 2.01 + 2.01 + 2.01 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.28 + 2.41 + 2.41 + 2.41 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 2.50 + 2.50 + 3.50	0.87 + 1.80 + 1.80 + 2.53 (2.40 - 8.50)	7.00	2,110 (450-2,650)	9.30	3.32	1.19 + 2.24 + 2.24 + 2.83 (2.60 - 9.50)	8.50	2,200 (480-2,580)	9.70	3.86
	1.20 + 2.50 + 3.50 + 3.50	0.79 + 1.64 + 2.29 + 2.29 (2.40 - 8.80)	7.00	2,110 (450-3,020)	9.30	3.32	1.11 + 2.09 + 2.65 + 2.65 (2.60 - 9.50)	8.50	2,180 (460-2,520)	9.60	3.90
	1.80 + 1.80 + 1.80 + 1.80	1.75 + 1.75 + 1.75 + 1.75 (2.40 - 7.90)	7.00	2,110 (450-2,870)	9.30	3.32	2.13 + 2.13 + 2.13 + 2.13 (2.60 - 9.50)	8.50	2,120 (480-2,580)	9.30	4.01
	1.80 + 1.80 + 1.80 + 2.50	1.59 + 1.59 + 1.59 + 2.22 (2.40 - 8.30)	7.00	2,110 (450-3,020)	9.30	3.32	1.95 + 1.95 + 1.95 + 2.65 (2.60 - 9.50)	8.50	2,120 (480-2,580)	9.30	4.01
	1.80 + 1.80 + 1.80 + 3.50	1.42 + 1.42 + 1.42 + 2.75 (2.40 - 8.50)	7.00	2,110 (450-3,090)	9.30	3.32	1.80 + 1.80 + 1.80 + 3.10 (2.60 - 9.50)	8.50	2,120 (460-2,520)	9.30	4.01
	1.80 + 1.80 + 1.80 + 5.00	1.21 + 1.21 + 1.21 + 3.37 (2.40 - 8.80)	7.00	2,110 (450-3,200)	9.30	3.32	1.52 + 1.52 + 1.52 + 3.95 (2.60 - 9.50)	8.50	2,110 (460-2,520)	9.30	4.03
	1.80 + 1.80 + 2.50 + 2.50	1.47 + 1.47 + 2.03 + 2.03 (2.40 - 8.50)	7.00	2,110 (450-3,090)	9.30	3.32	1.80 + 1.80 + 2.45 + 2.45 (2.60 - 9.50)	8.50	2,120 (460-2,520)	9.30	4.01
	1.80 + 1.80 + 2.50 + 3.50	1.31 + 1.31 + 1.82 + 2.55 (2.40 - 8.50)	7.00	2,110 (450-3,090)	9.30	3.32	1.67 + 1.67 + 2.28 + 2.88 (2.60 - 9.50)	8.50	2,120 (460-2,520)	9.30	4.01
	1.80 + 1.80 + 3.50 + 3.50	1.19 + 1.19 + 2.31 + 2.31 (2.40 - 8.80)	7.00	2,110 (450-3,200)	9.30	3.32	1.56 + 1.56 + 2.69 + 2.69 (2.60 - 9.50)	8.50	2,110 (460-2,520)	9.30	4.03
	1.80 + 2.50 + 2.50 + 2.50	1.35 + 1.88 + 1.88 + 1.88 (2.40 - 8.50)	7.00	2,110 (450-3,090)	9.30	3.32	1.67 + 2.28 + 2.28 + 2.28 (2.60 - 9.50)	8.50	2,120 (460-2,520)	9.30	4.01
	1.80 + 2.50 + 2.50 + 3.50	1.22 + 1.70 + 1.70 + 2.38 (2.40 - 8.80)	7.00	2,110 (450-3,200)	9.30	3.32	1.56 + 2.13 + 2.13 + 2.69 (2.60 - 9.50)	8.50	2,110 (460-2,520)	9.30	4.03
	2.50 + 2.50 + 2.50 + 2.50	1.75 + 1.75 + 1.75 + 1.75 (2.40 - 8.80)	7.00	2,110 (450-3,200)	9.30	3.32	2.13 + 2.13 + 2.13 + 2.13 (2.60 - 9.50)	8.50	2,110 (460-2,520)	9.30	4.03
	2.50 + 2.50 + 2.50 + 3.50	1.59 + 1.59 + 1.59 + 2.23 (2.40 - 8.80)	7.00	2,110 (450-3,200)	9.30	3.32	1.99 + 1.99 + 1.99 + 2.52 (2.60 - 9.50)	8.50	2,110 (460-2,520)	9.30	4.03

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two or more indoor units are connected.
- * The indication "two units" shows operation data of two indoor units when two or more indoor units are connected.
- * The indication "three units" shows operation data of three indoor units when three or more indoor units are connected.
- * The total nominal cooling capacity must not exceed 11kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



Multi Combinations

RAM 90NP5A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		INPUT NOMINAL (kW) (min-max)	OUTDOOR UNIT			EER	INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
			TOTAL	INPUT POWER (W)	CURRENT (A) 230 V				INPUT POWER (W)	CURRENT (A) 230V	
ONE UNIT	1.20	1.20	1.20	350	1.50	3.43	1.80	1.80	480		3.75
	1.80	1.80	1.80	500	2.20	3.60	2.50	2.50	780	3.43	3.21
	2.50	2.50	2.50	700	3.10	3.57	3.40	3.40	1,140	5.01	2.98
	3.50	3.50	3.50	1,040	4.60	3.37	4.30	4.30	1,420	6.24	3.03
	5.00	5.00	5.00	1,540	6.80	3.25	6.50	6.50	2,300	10.10	2.83
TWO UNITS	1.20 + 1.20	1.20 + 1.20	2.40	560	2.50	4.29	1.80 + 1.80	3.60	840	3.69	4.29
	1.20 + 1.80	1.20 + 1.80	3.00	700	3.10	4.29	1.80 + 2.50	4.30	1,180	5.18	3.64
	1.20 + 2.50	1.20 + 2.50	3.70	750	3.30	4.93	1.80 + 3.40	5.20	1,280	5.62	4.06
	1.20 + 3.50	1.20 + 3.50	4.70	1,050	4.60	4.48	1.80 + 4.30	6.10	1,550	6.81	3.94
	1.20 + 5.00	1.20 + 5.00	6.20	2,200	9.70	2.82	1.80 + 6.50	8.30	2,420	10.63	3.43
	1.80 + 1.80	1.80 + 1.80	3.60	710	3.10	5.07	2.50 + 2.50	5.00	1,240	5.45	4.03
	1.80 + 2.50	1.80 + 2.50	4.30	1,000	4.40	4.30	2.50 + 3.40	5.90	1,530	6.72	3.86
	1.80 + 3.50	1.80 + 3.50	5.30	1,590	7.00	3.33	2.50 + 4.30	6.80	1,870	8.21	3.64
	1.80 + 5.00	1.80 + 5.00	6.80	2,470	10.80	2.75	2.39 + 6.21	8.60	2,470	10.85	3.48
	2.50 + 2.50	2.50 + 2.50	5.00	1,370	6.00	3.65	3.40 + 3.40	6.80	1,810	7.95	3.76
	2.50 + 3.50	2.50 + 3.50	6.00	2,000	8.80	3.00	3.40 + 4.30	7.70	2,160	9.49	3.56
	2.50 + 5.00	2.50 + 5.00	7.50	2,880	12.60	2.60	3.16 + 6.04	9.20	2,720	11.95	3.38
	3.50 + 3.50	3.50 + 3.50	7.00	2,490	10.90	2.81	4.30 + 4.30	8.60	2,460	10.80	3.50
	3.50 + 5.00	3.29 + 4.71	8.00	2,730	12.00	2.93	3.86 + 5.84	9.70	2,940	12.91	3.30
	5.00 + 5.00	4.20 + 4.20	8.40	2,900	12.70	2.90	5.10 + 5.10	10.20	2,860	12.56	3.57
THREE UNITS	1.20 + 1.20 + 1.20	1.20 + 1.20 + 1.20	3.60	730	3.20	4.93	1.80 + 1.80 + 1.80	5.40	1,320	5.80	4.09
	1.20 + 1.20 + 1.80	1.20 + 1.20 + 1.80	4.20	1,000	4.40	4.20	1.80 + 1.80 + 2.50	6.10	1,580	6.94	3.86
	1.20 + 1.20 + 2.50	1.20 + 1.20 + 2.50	4.90	1,320	5.80	3.71	1.80 + 1.80 + 3.40	7.00	1,900	8.34	3.68
	1.20 + 1.20 + 3.50	1.20 + 1.20 + 3.50	5.90	1,750	7.70	3.37	1.80 + 1.80 + 4.30	7.90	2,180	9.57	3.62
	1.20 + 1.20 + 5.00	1.20 + 1.20 + 5.00	7.40	2,100	9.20	3.52	1.80 + 1.80 + 6.50	10.10	2,730	11.99	3.70
	1.20 + 1.80 + 1.80	1.20 + 1.80 + 1.80	4.80	1,350	5.90	3.56	1.80 + 2.50 + 2.50	6.80	1,880	8.26	3.62
	1.20 + 1.80 + 2.50	1.20 + 1.80 + 2.50	5.50	1,490	6.50	3.69	1.80 + 2.50 + 3.40	7.70	2,130	9.35	3.62
	1.20 + 1.80 + 3.50	1.20 + 1.80 + 3.50	6.50	1,850	8.10	3.51	1.80 + 2.50 + 4.30	8.60	2,350	10.32	3.66
	1.20 + 1.80 + 5.00	1.20 + 1.80 + 5.00	8.00	2,230	9.80	3.59	1.80 + 2.50 + 6.50	10.80	2,850	12.52	3.79
	1.20 + 2.50 + 2.50	1.20 + 2.50 + 2.50	6.20	1,800	7.90	3.44	1.80 + 3.40 + 3.40	8.60	2,350	10.32	3.66
	1.20 + 2.50 + 3.50	1.20 + 2.50 + 3.50	7.20	1,900	8.30	3.79	1.80 + 3.40 + 4.30	9.50	2,620	11.51	3.63
	1.20 + 2.50 + 5.00	1.20 + 2.50 + 5.00	8.70	2,680	11.80	3.25	1.69 + 3.20 + 6.11	11.00	2,890	12.69	3.81
	1.20 + 3.50 + 3.50	1.20 + 3.50 + 3.50	8.20	2,560	11.20	3.20	1.80 + 4.30 + 4.30	10.40	2,990	13.13	3.48
	1.20 + 3.50 + 5.00	1.11 + 3.25 + 4.64	9.00	2,740	12.00	3.28	1.57 + 3.75 + 5.67	11.00	2,890	12.89	3.81
	1.20 + 5.00 + 5.00	0.96 + 4.02 + 4.02	9.00	2,740	12.00	3.28	1.34 + 4.83 + 4.83	11.00	2,890	12.69	3.81
	1.80 + 1.80 + 1.80	1.80 + 1.80 + 1.80	5.40	1,480	6.50	3.65	2.50 + 2.50 + 2.50	7.50	2,020	8.87	3.71
	1.80 + 1.80 + 2.50	1.80 + 1.80 + 2.50	6.10	1,780	7.80	3.43	2.38 + 2.38 + 3.24	8.00	2,210	9.71	3.62
	1.80 + 1.80 + 3.50	1.80 + 1.80 + 3.50	7.10	1,910	8.40	3.72	2.37 + 2.37 + 4.06	8.80	2,370	10.41	3.71
	1.80 + 1.80 + 5.00	1.80 + 1.80 + 5.00	8.60	2,680	11.80	3.21	2.20 + 2.20 + 5.70	10.10	2,730	11.99	3.70
	1.80 + 2.50 + 2.50	1.80 + 2.50 + 2.50	6.80	1,860	8.20	3.66	2.30 + 3.15 + 3.15	8.60	2,370	10.41	3.63
	1.80 + 2.50 + 3.50	1.80 + 2.50 + 3.50	7.80	2,190	9.60	3.56	2.30 + 3.13 + 3.96	9.40	2,530	11.11	3.72
	1.80 + 2.50 + 5.00	1.75 + 2.40 + 4.85	9.00	2,700	11.90	3.33	2.10 + 2.85 + 5.45	10.40	2,890	12.69	3.60
	1.80 + 3.50 + 3.50	1.80 + 3.50 + 3.50	8.80	2,690	11.80	3.27	2.34 + 4.03 + 4.03	10.40	2,750	12.08	3.78
	1.80 + 3.50 + 5.00	1.55 + 3.05 + 4.40	9.00	2,740	12.00	3.28	1.95 + 3.36 + 5.09	10.40	2,990	13.13	3.48
	1.80 + 5.00 + 5.00	1.38 + 3.81 + 3.81	9.00	2,740	12.00	3.28	1.68 + 4.36 + 4.36	10.40	2,990	13.13	3.48
	2.50 + 2.50 + 2.50	2.50 + 2.50 + 2.50	7.50	2,120	9.30	3.54	3.00 + 3.00 + 3.00	9.00	2,540	11.16	3.54
	2.50 + 2.50 + 3.50	2.50 + 2.50 + 3.50	8.50	2,560	11.20	3.32	3.06 + 3.06 + 3.87	10.00	2,730	11.99	3.66
	2.50 + 2.50 + 5.00	2.25 + 2.25 + 4.50	9.00	2,780	12.20	3.24	2.66 + 2.66 + 5.08	10.40	2,990	13.13	3.48
	2.50 + 3.50 + 3.50	2.36 + 3.32 + 3.32	9.00	2,750	12.10	3.27	2.95 + 3.73 + 3.73	10.40	2,890	12.69	3.60
	2.50 + 3.50 + 5.00	2.05 + 2.85 + 4.10	9.00	2,770	12.20	3.25	2.49 + 3.14 + 4.77	10.40	2,990	13.13	3.48
	2.50 + 5.00 + 5.00	1.80 + 3.60 + 3.60	9.00	2,780	12.20	3.24	2.18 + 4.16 + 4.16	10.50	2,990	13.13	3.51
	3.50 + 3.50 + 3.50	3.00 + 3.00 + 3.00	9.00	2,740	12.00	3.28	3.47 + 3.47 + 3.47	10.40	2,990	13.13	3.48
	3.50 + 3.50 + 5.00	2.65 + 2.65 + 3.70	9.00	2,780	12.20	3.24	2.99 + 3.01 + 4.47	10.50	2,990	13.13	3.51
	3.50 + 5.00 + 5.00	2.30 + 3.35 + 3.35	9.00	2,780	12.20	3.24	2.61 + 3.97 + 3.97	10.50	2,990	13.13	3.51
	5.00 + 5.00 + 5.00	3.00 + 3.00 + 3.00	9.00	2,850	12.50	3.16	3.67 + 3.67 + 3.67	11.00	2,890	12.69	3.81



RAM 90NP5A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		NOMINAL POWER (kW) (min-max)	OUTDOOR UNIT			EER	NOMINAL POWER (kW) (min-max)	OUTDOOR UNIT			COP
			TOTAL	INPUT POWER (W)	CURRENT (A) 230V			TOTAL	INPUT POWER (W)	CURRENT (A) 230V	
FOUR UNITS	1.20 + 1.20 + 1.20 + 1.20	1.20 + 1.20 + 1.20 + 1.20	4.80	1,350	5.90	3.56	1.80 + 1.80 + 1.80 + 1.80	7.20	2,000	8.78	3.60
	1.20 + 1.20 + 1.20 + 1.80	1.20 + 1.20 + 1.20 + 1.80	5.40	1,480	6.50	3.65	1.80 + 1.80 + 1.80 + 2.50	7.90	2,200	9.66	3.59
	1.20 + 1.20 + 1.20 + 2.50	1.20 + 1.20 + 1.20 + 2.50	6.10	1,780	7.80	3.43	1.80 + 1.80 + 1.80 + 3.40	8.80	2,390	10.50	3.68
	1.20 + 1.20 + 1.20 + 3.50	1.20 + 1.20 + 1.20 + 3.50	7.10	1,910	8.40	3.72	1.80 + 1.80 + 1.80 + 4.30	9.70	2,550	11.20	3.80
	1.20 + 1.20 + 1.20 + 5.00	1.19 + 1.19 + 1.19 + 4.94	8.50	2,680	11.80	3.17	1.66 + 1.66 + 1.66 + 6.01	11.00	2,890	12.69	3.81
	1.20 + 1.20 + 1.80 + 1.80	1.20 + 1.20 + 1.80 + 1.80	6.00	1,750	7.70	3.43	1.80 + 1.80 + 2.50 + 2.50	8.60	2,380	10.45	3.61
	1.20 + 1.20 + 1.80 + 2.50	1.20 + 1.20 + 1.80 + 2.50	6.70	1,850	8.10	3.62	1.80 + 1.80 + 2.50 + 3.40	9.50	2,530	11.11	3.75
	1.20 + 1.20 + 1.80 + 3.50	1.20 + 1.20 + 1.80 + 3.50	7.70	2,180	9.60	3.53	1.80 + 1.80 + 2.50 + 4.30	10.40	2,480	10.89	4.19
	1.20 + 1.20 + 1.80 + 5.00	1.11 + 1.11 + 1.66 + 4.62	8.50	2,740	12.00	3.10	1.57 + 1.57 + 2.18 + 5.67	11.00	2,890	12.69	3.81
	1.20 + 1.20 + 2.50 + 2.50	1.20 + 1.20 + 2.50 + 2.50	7.40	2,150	9.40	3.44	1.80 + 1.80 + 3.40 + 3.40	10.40	2,480	10.89	4.19
	1.20 + 1.20 + 2.50 + 3.50	1.20 + 1.20 + 2.50 + 3.50	8.40	2,550	11.20	3.29	1.75 + 1.75 + 3.31 + 4.19	11.00	2,890	12.69	3.81
	1.20 + 1.20 + 2.50 + 5.00	1.03 + 1.03 + 2.15 + 4.29	8.50	2,740	12.00	3.10	1.47 + 1.47 + 2.77 + 5.30	11.00	2,890	12.69	3.81
	1.20 + 1.20 + 3.50 + 3.50	1.09 + 1.09 + 3.16 + 3.16	8.50	2,740	12.00	3.10	1.62 + 1.62 + 3.88 + 3.88	11.00	2,890	12.69	3.81
	1.20 + 1.20 + 3.50 + 5.00	0.94 + 0.94 + 2.73 + 3.90	8.50	2,740	12.00	3.10	1.38 + 1.38 + 3.28 + 4.97	11.00	2,890	12.69	3.81
	1.20 + 1.20 + 5.00 + 5.00	0.82 + 0.82 + 3.43 + 3.43	8.50	2,740	12.00	3.10	1.19 + 1.19 + 4.31 + 4.31	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 1.80 + 1.80	1.20 + 1.80 + 1.80 + 1.80	6.60	1,870	8.20	3.53	1.80 + 2.50 + 2.50 + 2.50	9.30	2,520	11.07	3.69
	1.20 + 1.80 + 1.80 + 2.50	1.20 + 1.80 + 1.80 + 2.50	7.30	2,140	9.40	3.41	1.80 + 2.50 + 2.50 + 3.40	10.20	2,750	12.08	3.71
	1.20 + 1.80 + 1.80 + 3.50	1.20 + 1.80 + 1.80 + 3.50	8.30	2,550	11.20	3.25	1.78 + 2.48 + 2.48 + 4.26	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 1.80 + 5.00	1.04 + 1.56 + 1.56 + 4.34	8.50	2,740	12.00	3.10	1.49 + 2.07 + 2.07 + 5.38	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 2.50 + 2.50	1.20 + 1.80 + 2.50 + 2.50	8.00	2,740	12.00	2.92	1.78 + 2.48 + 3.37 + 3.37	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 2.50 + 3.50	1.13 + 1.70 + 2.36 + 3.31	8.50	2,740	12.00	3.10	1.65 + 2.29 + 3.12 + 3.94	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 2.50 + 5.00	0.97 + 1.46 + 2.02 + 4.05	8.50	2,740	12.00	3.10	1.39 + 1.94 + 2.63 + 5.04	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 3.50 + 3.50	1.02 + 1.53 + 2.98 + 2.98	8.50	2,740	12.00	3.10	1.53 + 2.13 + 3.67 + 3.67	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 3.50 + 5.00	0.89 + 1.33 + 2.59 + 3.70	8.50	2,740	12.00	3.10	1.31 + 1.82 + 3.13 + 4.74	11.00	2,890	12.69	3.81
	1.20 + 1.80 + 5.00 + 5.00	0.78 + 1.18 + 3.27 + 3.27	8.50	2,740	12.00	3.10	1.14 + 1.59 + 4.13 + 4.13	11.00	2,890	12.69	3.81
	1.20 + 2.50 + 2.50 + 2.50	1.17 + 2.44 + 2.44 + 2.44	8.50	2,670	11.70	3.18	1.65 + 3.12 + 3.12 + 3.12	11.00	2,890	12.69	3.81
	1.20 + 2.50 + 2.50 + 3.50	1.05 + 2.19 + 2.19 + 3.07	8.50	2,740	12.00	3.10	1.53 + 2.90 + 2.90 + 3.67	11.00	2,890	12.69	3.81
	1.20 + 2.50 + 2.50 + 5.00	0.91 + 1.90 + 1.90 + 3.79	8.50	2,740	12.00	3.10	1.31 + 2.48 + 2.48 + 4.74	11.00	2,890	12.69	3.81
	1.20 + 2.50 + 3.50 + 3.50	0.95 + 1.99 + 2.78 + 2.78	8.50	2,740	12.00	3.10	1.43 + 2.71 + 3.43 + 3.43	11.00	2,890	12.69	3.81
	1.20 + 2.50 + 3.50 + 5.00	0.84 + 1.74 + 2.44 + 3.48	8.50	2,740	12.00	3.10	1.24 + 2.34 + 2.96 + 4.47	11.00	2,890	12.69	3.81
	1.20 + 2.50 + 5.00 + 5.00	0.74 + 1.55 + 3.10 + 3.10	8.50	2,740	12.00	3.10	1.09 + 2.05 + 3.93 + 3.93	11.00	2,890	12.69	3.81
	1.20 + 3.50 + 3.50 + 3.50	0.87 + 2.54 + 2.54 + 2.54	8.50	2,740	12.00	3.10	1.35 + 3.22 + 3.22 + 3.22	11.00	2,890	12.69	3.81
	1.20 + 3.50 + 3.50 + 5.00	0.77 + 2.25 + 2.25 + 3.22	8.50	2,740	12.00	3.10	1.17 + 2.80 + 2.80 + 4.23	11.00	2,890	12.69	3.81
	1.20 + 3.50 + 5.00 + 5.00	0.69 + 2.02 + 2.89 + 2.89	8.50	2,740	12.00	3.10	1.04 + 2.48 + 3.74 + 3.74	11.00	2,890	12.69	3.81
	1.80 + 1.80 + 1.80 + 1.80	1.80 + 1.80 + 1.80 + 1.80	7.20	1,800	7.90	4.00	2.40 + 2.40 + 2.40 + 2.40	9.60	2,400	10.54	4.00
	1.80 + 1.80 + 1.80 + 2.50	1.80 + 1.80 + 1.80 + 2.50	7.90	2,090	9.20	3.78	2.25 + 2.25 + 2.25 + 3.06	9.80	2,700	11.86	3.63
	1.80 + 1.80 + 1.80 + 3.50	1.72 + 1.72 + 1.72 + 3.34	8.50	2,415	10.60	3.52	2.16 + 2.16 + 2.16 + 3.72	10.20	2,700	11.86	3.78
	1.80 + 1.80 + 1.80 + 5.00	1.46 + 1.46 + 1.46 + 4.11	8.50	2,390	10.50	3.56	1.82 + 1.81 + 1.81 + 4.76	10.20	2,700	11.86	3.78
	1.80 + 1.80 + 2.50 + 2.50	1.78 + 1.78 + 2.47 + 2.47	8.50	2,320	10.20	3.66	2.12 + 2.12 + 2.88 + 2.88	10.00	2,700	11.86	3.70
	1.80 + 1.80 + 2.50 + 3.50	1.59 + 1.59 + 2.21 + 3.10	8.50	2,390	10.50	3.56	2.01 + 2.01 + 2.73 + 3.45	10.20	2,700	11.86	3.78
	1.80 + 1.80 + 2.50 + 5.00	1.37 + 1.37 + 1.90 + 3.88	8.50	2,390	10.50	3.56	1.71 + 1.70 + 2.32 + 4.50	10.20	2,700	11.86	3.78
	1.80 + 1.80 + 3.50 + 3.50	1.44 + 1.44 + 2.81 + 2.81	8.50	2,390	10.50	3.56	1.88 + 1.88 + 3.23 + 3.23	10.20	2,700	11.86	3.78
	1.80 + 1.80 + 3.50 + 5.00	1.27 + 1.27 + 2.46 + 3.49	8.50	2,390	10.50	3.56	1.61 + 1.62 + 2.78 + 4.18	10.20	2,700	11.86	3.78
	1.80 + 1.80 + 5.00 + 5.00	1.14 + 1.14 + 3.12 + 3.12	8.50	2,370	10.40	3.59	1.44 + 1.45 + 3.75 + 3.75	10.40	2,700	11.86	3.85
	1.80 + 2.50 + 2.50 + 2.50	1.71 + 2.26 + 2.26 + 2.26	8.50	2,390	10.50	3.56	2.01 + 2.71 + 2.71 + 2.71	10.20	2,700	11.86	3.78
	1.80 + 2.50 + 2.50 + 3.50	1.52 + 2.08 + 2.08 + 2.83	8.50	2,390	10.50	3.56	1.88 + 2.57 + 2.57 + 3.17	10.20	2,700	11.86	3.78
	1.80 + 2.50 + 2.50 + 5.00	1.33 + 1.79 + 1.79 + 3.59	8.50	2,390	10.50	3.56	1.61 + 2.18 + 2.18 + 4.19	10.20	2,700	11.86	3.78
	1.80 + 2.50 + 3.50 + 3.50	1.32 + 1.89 + 2.64 + 2.64	8.50	2,390	10.50	3.56	1.76 + 2.40 + 3.03 + 3.03	10.20	2,700	11.86	3.78
	1.80 + 2.50 + 3.50 + 5.00	1.23 + 1.65 + 2.31 + 3.30	8.50	2,390	10.50	3.56	1.53 + 2.07 + 2.62 + 3.95	10.20	2,700	11.86	3.78
	1.80 + 2.50 + 5.00 + 5.00	1.09 + 1.47 + 2.97 + 2.97	8.50	2,370	10.40	3.59	1.46 + 1.96 + 3.78 + 3.78	11.00	2,630	11.55	4.18
	1.80 + 3.50 + 3.50 + 3.50	1.27 + 2.41 + 2.41 + 2.41	8.50	2,390	10.50	3.56	1.66 + 2.84 + 2.84 + 2.84	10.20	2,700	11.86	3.78
	1.80 + 3.50 + 3.50 + 5.00	1.09 + 2.18 + 2.18 + 3.07	8.50	2,390	10.50	3.56	1.56 + 2.71 + 2.71 + 4.05	11.00	2,800	12.30	3.93
	1.80 + 3.50 + 5.00 + 5.00	0.99 + 1.93 + 2.79 + 2.79	8.50	2,370	10.40	3.59	1.39 + 2.38 + 3.62 + 3.62	11.00	2,630	11.55	4.18
	2.50 + 2.50 + 2.50 + 2.50	2.13 + 2.13 + 2.13 + 2.13	8.50	2,390	10.50	3.56	2.55 + 2.55 + 2.55 + 2.55	10.20	2,700	11.86	3.78
	2.50 + 2.50 + 2.50 + 3.50	1.93 + 1.93 + 1.93 + 2.69	8.50	2,390	10.50	3.56	2.39 + 2.39 + 2.39 + 3.01	10.20	2,700	11.86	3.78
	2.50 + 2.50 + 2.50 + 5.00	1.70 + 1.70 + 1.70 + 3.40	8.50	2,390	10.50	3.56	2.12 + 2.12 + 2.12 + 4.05	10.40	2,700	11.86	3.85
	2.50 + 2.50 + 3.50 + 3.50	1.77 + 1.77 + 2.47 + 2.47	8.50	2,390	10.50	3.56	1.76 + 2.39 + 3.01 + 3.01	10.20	2,700	11.86	3.78
	2.50 + 2.50 + 3.50 + 5.00	1.57 + 1.57 + 2.20 + 3.15	8.50	2,390	10.50	3.56	2.01 + 2.01 + 2.54 + 3.84	10.40	2,700	11.86	3.85
	2.50 + 2.50 + 5.00 + 5.00	1.42 + 1.42 + 2.83 + 2.83	8.50	2,370	10.40	3.59	1.89 + 1.89 + 3.61 + 3.61	11.00	2,630	11.55	4.18
	2.50 + 3.50 + 3.50 + 3.50	1.64 + 2.29 + 2.29 + 2.29	8.50	2,390	10.50	3.56	2.17 + 2.74 + 2.74 + 2.74	10.40	2,700	11.86	3.85
	2.50 + 3.50 + 3.50 + 5.00	1.48 + 2.05 + 2.05 + 2.93	8.50	2,390	10.50	3.56	2.02 + 2.56 + 2.56 + 3.86	11.00	2,630	11.55	4.18
	3.50 + 3.50 + 3.50 + 3.50	2.13 + 2.13 + 2.13 + 2.13	8.50	2,390	10.50	3.56	2.75 + 2.75 + 2.75 + 2.75	11.00	2,630	11.55	4.18
	3.50 + 3.50 + 3.50 + 5.00	1.92 + 1.92 + 1.92 + 2.74	8.50	2,390	10.50	3.56	2.44 + 2.44 + 2.44 + 3.69	11.00	2,630	11.55	4.18

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two or more indoor units are connected.
- * The indication "two units" shows operation data of two indoor units when two or more indoor units are connected.
- * The indication "three units" shows operation data of three indoor units when three or more indoor units are connected.
- * The indication "four units" shows operation data of four indoor units when four or five indoor units are connected.
- * The total nominal cooling capacity must not exceed 15.5 kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



Multi Split

Multi Combinations

RAM 90NP5A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		NOMINAL POWER (kW) (min-max)	OUTDOOR UNIT			EER	NOMINAL POWER (kW) (min-max)	OUTDOOR UNIT			COP
			TOTAL	INPUT POWER (W)	CURRENT (A) 230V			TOTAL	INPUT POWER (W)	CURRENT (A) 230V	
FIFTH UNIT	1.20+1.20+1.20+1.20+1.20	1.20+1.20+1.20+1.20+1.20	6.00	1,770	7.80	3.39	1.80+1.80+1.80+1.80+1.80	9.00	2,350	10.32	3.83
	1.20+1.20+1.20+1.20+1.80	1.20+1.20+1.20+1.20+1.80	6.60	1,850	8.10	3.57	1.80+1.80+1.80+1.80+2.50	9.70	2,360	10.36	4.11
	1.20+1.20+1.20+1.20+2.50	1.20+1.20+1.20+1.20+2.50	7.30	1,950	8.60	3.74	1.80+1.80+1.80+1.80+3.40	10.60	2,400	10.54	4.11
	1.20+1.20+1.20+1.20+3.50	1.20+1.20+1.20+1.20+3.50	8.30	2,590	11.40	3.20	1.72+1.72+1.72+1.72+4.11	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+1.20+5.00	1.04+1.04+1.04+1.04+4.34	8.50	2,390	10.50	3.56	1.45+1.45+1.45+1.45+5.22	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+1.80+1.80	1.20+1.20+1.20+1.80+1.80	7.20	1,950	8.60	3.67	1.80+1.80+1.80+2.50+2.50	10.40	2,460	10.80	4.23
	1.20+1.20+1.20+1.80+2.50	1.20+1.20+1.20+1.80+2.50	7.90	2,200	9.70	3.59	1.75+1.75+1.75+2.43+3.31	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+1.80+3.50	1.15+1.15+1.15+1.72+3.34	8.50	2,390	10.50	3.56	1.62+1.62+1.62+2.25+3.88	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+1.80+5.00	0.98+0.98+0.98+1.47+4.09	8.50	2,390	10.50	3.56	1.38+1.38+1.38+1.91+4.97	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+2.50+2.50	1.19+1.19+1.19+2.47+2.47	8.50	2,450	10.80	3.47	1.62+1.62+1.62+3.07+3.07	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+2.50+3.50	1.06+1.06+1.06+2.21+3.10	8.50	2,390	10.50	3.56	1.51+1.51+1.51+2.85+3.61	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+2.50+5.00	0.92+0.92+0.92+1.91+3.83	8.50	2,390	10.50	3.56	1.29+1.29+1.29+2.44+4.67	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+3.50+3.50	0.96+0.96+0.96+2.81+2.81	8.50	2,390	10.50	3.56	1.41+1.41+1.41+3.38+3.38	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+3.50+5.00	0.84+0.84+0.84+2.46+3.51	8.50	2,390	10.50	3.56	1.22+1.22+1.22+2.92+4.41	11.00	2,460	10.80	4.47
	1.20+1.20+1.20+5.00+5.00	0.75+0.75+0.75+3.13+3.13	8.50	2,390	10.50	3.56	1.08+1.08+1.08+3.89+3.89	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+1.80+1.80	1.20+1.20+1.80+1.80+1.80	7.80	2,180	9.60	3.58	1.78+1.78+2.48+2.48+2.48	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+1.80+2.50	1.20+1.20+1.80+1.80+2.50	8.50	2,490	10.90	3.41	1.65+1.65+2.29+2.29+3.12	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+1.80+3.50	1.07+1.07+1.61+1.61+3.13	8.50	2,390	10.50	3.56	1.53+1.53+2.13+2.13+3.67	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+1.80+5.00	0.93+0.93+1.39+1.39+3.86	8.50	2,390	10.50	3.56	1.31+1.31+1.82+1.82+4.74	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+2.50+2.50	1.11+1.11+1.66+2.31+2.31	8.50	2,390	10.50	3.56	1.53+1.53+2.13+2.90+2.90	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+2.50+3.50	1.00+1.00+1.50+2.08+2.92	8.50	2,390	10.50	3.56	1.43+1.43+1.99+2.71+3.43	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+2.50+5.00	0.87+0.87+1.31+1.82+3.63	8.50	2,390	10.50	3.56	1.24+1.24+1.72+2.34+4.47	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+3.50+3.50	0.91+0.91+1.37+2.66+2.66	8.50	2,390	10.50	3.56	1.35+1.35+1.87+3.22+3.22	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+3.50+5.00	0.80+0.80+1.20+2.34+3.35	8.50	2,390	10.50	3.56	1.17+1.17+1.63+2.80+4.23	11.00	2,460	10.80	4.47
	1.20+1.20+1.80+5.00+3.50	0.72+0.72+1.08+2.99+2.99	8.50	2,390	10.50	3.56	1.04+1.04+1.44+3.74+3.74	11.00	2,460	10.80	4.47
	1.20+1.20+2.50+2.50+2.50	1.03+1.03+2.15+2.15+2.15	8.50	2,390	10.50	3.56	1.43+1.43+2.71+2.71+2.71	11.00	2,460	10.80	4.47
	1.20+1.20+2.50+2.50+3.50	0.94+0.94+1.95+1.95+2.73	8.50	2,390	10.50	3.56	1.35+1.35+2.54+2.54+3.22	11.00	2,460	10.80	4.47
	1.20+1.20+2.50+2.50+5.00	0.82+0.82+1.71+1.71+3.43	8.50	2,390	10.50	3.56	1.17+1.17+2.21+2.21+4.23	11.00	2,460	10.80	4.47
	1.20+1.20+2.50+3.50+3.50	0.86+0.86+1.79+2.50+2.50	8.50	2,390	10.50	3.56	1.27+1.27+2.40+3.03+3.03	11.00	2,460	10.80	4.47
	1.20+1.20+2.50+3.50+5.00	0.76+0.76+1.59+2.22+3.17	8.50	2,390	10.50	3.56	1.11+1.11+2.10+2.66+4.02	11.00	2,460	10.80	4.47
	1.20+1.20+2.50+5.00+5.00	0.86+0.86+1.79+2.50+2.50	8.50	2,390	10.50	3.56	0.99+0.99+1.87+3.58+3.58	11.00	2,460	10.80	4.47
	1.20+1.20+3.50+3.50+3.50	0.76+0.76+1.59+2.22+3.17	8.50	2,390	10.50	3.56	1.20+1.20+2.87+2.87+2.87	11.00	2,460	10.80	4.47
	1.20+1.20+3.50+3.50+5.00	0.71+0.71+2.07+2.07+2.95	8.50	2,390	10.50	3.56	1.06+1.06+2.53+2.53+3.82	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+1.80+1.80	1.20+1.80+1.80+1.80+1.80	8.40	2,530	11.10	3.32	1.68+2.53+2.33+2.33+2.33	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+1.80+2.50	1.12+1.68+1.68+1.68+2.34	8.50	2,390	10.50	3.56	1.56+2.17+2.17+2.17+2.94	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+1.80+3.50	1.01+1.51+1.51+1.51+2.95	8.50	2,390	10.50	3.56	1.46+2.02+2.02+2.02+3.48	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+1.80+5.00	0.88+1.32+1.32+1.32+3.66	8.50	2,390	10.50	3.56	1.25+1.74+1.74+1.74+4.53	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+2.50+2.50	1.04+1.56+1.56+2.17+2.17	8.50	2,390	10.50	3.56	1.46+2.02+2.02+2.75+2.75	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+2.50+3.50	0.94+1.42+1.42+1.97+2.75	8.50	2,390	10.50	3.56	1.37+1.90+1.90+2.58+3.26	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+2.50+5.00	0.83+1.24+1.24+1.73+3.46	8.50	2,390	10.50	3.56	1.19+1.65+1.65+2.24+4.28	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+3.50+3.50	0.86+1.30+1.30+2.52+2.52	8.50	2,390	10.50	3.56	1.29+1.79+1.79+3.07+3.07	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+3.50+5.00	0.77+1.15+1.15+2.24+3.20	8.50	2,390	10.50	3.56	1.13+1.56+1.56+2.69+4.06	11.00	2,460	10.80	4.47
	1.20+1.80+1.80+5.00+5.00	0.69+1.03+1.03+2.87+2.87	8.50	2,390	10.50	3.56	1.00+1.39+1.39+3.61+3.61	11.00	2,460	10.80	4.47
	1.20+1.80+2.50+2.50+2.50	0.97+1.46+2.02+2.02+2.02	8.50	2,390	10.50	3.56	1.37+1.90+2.58+2.58+2.58	11.00	2,460	10.80	4.47
	1.20+1.80+2.50+2.50+3.50	0.89+1.33+1.85+1.85+2.59	8.50	2,390	10.50	3.56	1.29+1.79+2.43+2.43+3.07	11.00	2,460	10.80	4.47
	1.20+1.80+2.50+2.50+5.00	0.78+1.18+1.63+1.63+3.27	8.50	2,390	10.50	3.56	1.13+1.56+2.13+2.13+4.06	11.00	2,460	10.80	4.47
	1.20+1.80+2.50+3.50+3.50	0.82+1.22+1.70+2.38+2.38	8.50	2,390	10.50	3.56	1.21+1.69+2.29+2.90+2.90	11.00	2,460	10.80	4.47
	1.20+1.80+2.50+3.50+5.00	0.73+1.09+1.52+2.13+3.04	8.50	2,390	10.50	3.56	1.07+1.49+2.02+2.56+3.86	11.00	2,460	10.80	4.47
	1.20+1.80+2.50+5.00+5.00	0.66+0.99+1.37+2.74+2.74	8.50	2,390	10.50	3.56	0.96+1.33+1.81+3.45+3.45	11.00	2,460	10.80	4.47
	1.20+1.80+3.50+3.50+3.50	0.76+1.13+2.20+2.20+2.20	8.50	2,390	10.50	3.56	1.15+1.60+2.75+2.75+2.75	11.00	2,460	10.80	4.47
	1.20+1.80+3.50+3.50+5.00	0.68+1.02+1.98+1.98+2.83	8.50	2,390	10.50	3.56	1.02+1.42+2.44+2.44+3.69	11.00	2,460	10.80	4.47



RAM 90NP5A											
POSSIBLE COMBINATIONS		COOLING					HEATING				
		NOMINAL POWER (kW) (min-max)	OUTDOOR UNIT			EER	NOMINAL POWER (kW) (min-max)	OUTDOOR UNIT			COP
			TOTAL	INPUT POWER (W)	CURRENT (A) 230V			TOTAL	INPUT POWER (W)	CURRENT (A) 230V	
FIFTH UNIT	1.80+1.80+1.80+1.80+1.80	1.70+1.70+1.70+1.70+1.70	8.50	2,230	9.80	3.81	2.20+2.20+2.20+2.20+2.20	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+1.80+2.50	1.58+1.58+1.58+1.58+2.19	8.50	2,230	9.80	3.81	2.05+2.05+2.05+2.05+2.79	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+1.80+3.50	1.43+1.43+1.43+1.43+2.80	8.50	2,230	9.80	3.81	1.92+1.92+1.92+1.92+3.33	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+1.80+5.00	1.25+1.25+1.25+1.25+3.47	8.50	2,230	9.80	3.81	1.67+1.67+1.67+1.67+4.32	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+2.50+2.50	1.47+1.47+1.47+2.04+2.04	8.50	2,230	9.80	3.81	1.92+1.92+1.92+2.62+2.62	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+2.50+3.50	1.34+1.34+1.34+1.86+2.62	8.50	2,230	9.80	3.81	1.81+1.81+1.81+2.46+3.12	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+2.50+5.00	1.19+1.19+1.19+1.65+3.28	8.50	2,230	9.80	3.81	1.58+1.58+1.58+2.15+4.10	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+3.50+3.50	1.22+1.22+1.22+2.41+2.41	8.50	2,230	9.80	3.81	1.71+1.70+1.70+2.95+2.95	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+3.50+5.00	1.10+1.10+1.10+2.14+3.04	8.50	2,230	9.80	3.81	1.50+1.50+1.50+2.58+3.89	11.00	2,460	10.80	4.47
	1.80+1.80+1.80+5.00+5.00	1.00+1.00+1.00+2.75+2.75	8.50	2,230	9.80	3.81	1.34+1.34+1.34+3.49+3.49	11.00	2,460	10.80	4.47
	1.80+1.80+2.50+2.50+2.50	1.39+1.39+1.90+1.90+1.90	8.50	2,230	9.80	3.81	1.81+1.81+2.45+2.45+2.45	11.00	2,460	10.80	4.47
	1.80+1.80+2.50+2.50+3.50	1.26+1.26+1.76+1.76+2.46	8.50	2,230	9.80	3.81	1.71+1.71+2.32+2.32+2.94	11.00	2,460	10.80	4.47
	1.80+1.80+2.50+2.50+5.00	1.13+1.13+1.56+1.56+3.14	8.50	2,230	9.80	3.81	1.50+1.50+2.04+2.04+3.92	11.00	2,460	10.80	4.47
	1.80+1.80+2.50+3.50+3.50	1.17+1.17+1.62+2.27+2.27	8.50	2,230	9.80	3.81	1.62+1.62+2.20+2.78+2.78	11.00	2,460	10.80	4.47
	1.80+1.80+2.50+3.50+5.00	1.05+1.05+1.46+2.04+2.91	8.50	2,230	9.80	3.81	1.43+1.43+1.95+2.46+3.72	11.00	2,460	10.80	4.47
	1.80+1.80+3.50+3.50+3.50	1.11+1.11+2.10+2.10+2.10	8.50	2,230	9.80	3.81	1.54+1.56+2.63+2.63+2.63	11.00	2,460	10.80	4.47
	1.80+2.50+2.50+2.50+2.50	1.29+1.80+1.80+1.80+1.80	8.50	2,230	9.80	3.81	1.80+2.30+2.30+2.30+2.30	11.00	2,460	10.80	4.47
	1.80+2.50+2.50+2.50+3.50	1.19+1.66+1.66+1.66+2.32	8.50	2,230	9.80	3.81	1.60+2.20+2.20+2.20+2.80	11.00	2,460	10.80	4.47
	1.80+2.50+2.50+2.50+5.00	1.08+1.49+1.49+1.49+2.97	8.50	2,230	9.80	3.81	1.45+1.95+1.95+1.95+3.70	11.00	2,460	10.80	4.47
	1.80+2.50+2.50+3.50+3.50	1.12+1.54+1.54+2.16+2.16	8.50	2,230	9.80	3.81	1.54+2.09+2.09+2.64+2.64	11.00	2,460	10.80	4.47
	1.80+2.50+2.50+3.50+5.00	1.00+1.39+1.39+1.94+2.78	8.50	2,230	9.80	3.81	1.37+1.86+1.86+2.35+3.56	11.00	2,460	10.80	4.47
	1.80+2.50+3.50+3.50+3.50	1.03+1.44+2.01+2.01+2.01	8.50	2,230	9.80	3.81	1.45+1.99+2.55+2.55+2.55	11.00	2,460	10.80	4.47
	2.50+2.50+2.50+2.50+2.50	1.70+1.70+1.70+1.70+1.70	8.50	2,230	9.80	3.81	2.20+2.20+2.20+2.20+2.20	11.00	2,460	10.80	4.47
	2.50+2.50+2.50+2.50+3.50	1.57+1.57+1.57+1.57+2.19	8.50	2,230	9.80	3.81	2.09+2.09+2.09+2.09+2.64	11.00	2,460	10.80	4.47
	2.50+2.50+2.50+2.50+5.00	1.42+1.42+1.42+1.42+2.83	8.50	2,230	9.80	3.81	1.86+1.86+1.86+1.86+3.56	11.00	2,460	10.80	4.47
	2.50+2.50+2.50+3.50+3.50	1.48+1.48+1.48+2.04+2.04	8.50	2,230	9.80	3.81	2.00+2.00+2.00+2.50+2.50	11.00	2,460	10.80	4.47
	2.50+2.50+3.50+3.50+3.50	1.39+1.39+1.91+1.91+1.91	8.50	2,230	9.80	3.81	1.90+1.90+2.40+2.40+2.40	11.00	2,460	10.80	4.47

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when two or more indoor units are connected.
- * The indication "two units" shows operation data of two indoor units when two or more indoor units are connected.
- * The indication "three units" shows operation data of three indoor units when three or more indoor units are connected.
- * The indication "four units" shows operation data of four indoor units when four or five indoor units are connected.
- * The total nominal cooling capacity must not exceed 15.5 kw.
- * At least two indoor units must be connected with at least 5 metres of piping for each one.



Multi Combinations

RAM 130NP6A											
POSSIBLE COMBINATIONS		COOLING									
		INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOTAL	OUTDOOR UNIT		COP
				INPUT POWER (W)	CURRENT (A)				INPUT POWER (W)	CURRENT (A)	
					230 V					230 V	
ONE UNIT	1.20	1.20	1.20	370	1.60	3.24	1.80	1.80	495	2.20	3.64
	1.80	1.80	1.80	560	2.50	3.21	2.50	2.50	750	3.30	3.33
	2.50	2.50	2.50	780	3.40	3.21	3.90	3.90	1,145	5.00	3.41
	3.50	3.50	3.50	1,160	5.10	3.02	4.80	4.80	1,550	6.80	3.10
	5.00	5.00	5.00	1,780	7.80	2.81	6.50	6.50	2,400	10.50	2.71
TWO UNITS	1.20 + 1.20	1.20 + 1.20	2.40	690	3.00	3.48	1.80 + 1.80	3.60	980	4.30	3.67
	1.20 + 1.80	1.20 + 1.80	3.00	920	4.00	3.26	1.80 + 2.50	4.30	1,180	5.20	3.64
	1.20 + 2.50	1.20 + 2.50	3.70	1,210	5.30	3.06	1.80 + 3.90	5.70	1,550	6.80	3.68
	1.20 + 3.50	1.20 + 3.50	4.70	1,450	6.40	3.24	1.80 + 4.80	6.60	1,850	8.10	3.57
	1.20 + 5.00	1.20 + 5.00	6.20	1,750	7.70	3.24	1.56 + 5.64	7.20	2,070	9.10	3.48
	1.80 + 1.80	1.80 + 1.80	3.60	1,190	5.20	3.03	2.50 + 2.50	5.00	1,460	6.40	3.42
	1.80 + 2.50	1.80 + 2.40	4.20	1,310	5.80	3.21	2.40 + 3.80	6.20	1,820	8.00	3.41
	1.80 + 3.50	1.70 + 3.30	5.00	1,650	7.20	3.03	2.30 + 4.50	6.80	1,995	8.80	3.41
	1.80 + 5.00	1.40 + 4.00	5.40	1,795	7.90	3.01	2.00 + 5.00	7.00	2,050	9.00	3.41
	2.50 + 2.50	2.50 + 2.50	5.00	1,650	7.20	3.03	3.40 + 3.40	6.80	2,015	8.80	3.37
	2.50 + 3.50	2.17 + 3.03	5.20	1,730	7.60	3.01	3.15 + 3.85	7.00	2,070	9.10	3.38
	3.50 + 3.50	2.70 + 2.70	5.40	1,795	7.90	3.01	3.60 + 3.60	7.20	2,110	9.30	3.41
	2.50 + 5.00	1.80 + 3.60	5.40	1,795	7.90	3.01	2.70 + 4.50	7.20	2,110	9.30	3.41
	3.50 + 5.00	2.50 + 3.50	6.00	1,995	8.80	3.01	3.05 + 4.15	7.20	2,110	9.30	3.41
THREE UNITS	1.20 + 1.20 + 1.20	1.20 + 1.20 + 1.20	3.60	1,080	4.70	3.33	1.80 + 1.80 + 1.80	5.40	1,480	6.50	3.65
	1.20 + 1.20 + 1.80	1.20 + 1.20 + 1.80	4.20	1,250	5.50	3.36	1.80 + 1.80 + 2.50	6.10	1,580	6.90	3.86
	1.20 + 1.20 + 2.50	1.20 + 1.20 + 2.50	4.90	1,450	6.40	3.38	1.73 + 1.73 + 3.74	7.20	1,900	8.30	3.79
	1.20 + 1.20 + 3.50	1.20 + 1.20 + 3.50	5.90	1,525	6.70	3.87	1.54 + 1.54 + 4.11	7.20	1,900	8.30	3.79
	1.20 + 1.20 + 5.00	1.02 + 1.02 + 4.26	6.30	2,095	9.20	3.01	1.28 + 1.28 + 4.63	7.20	1,900	8.30	3.79
	1.20 + 1.80 + 1.80	1.20 + 1.80 + 1.80	4.80	1,420	6.20	3.38	1.80 + 2.50 + 2.50	6.80	1,750	7.70	3.89
	1.20 + 1.80 + 2.50	1.20 + 1.80 + 2.50	5.50	1,780	7.80	3.09	1.58 + 2.20 + 3.42	7.20	1,900	8.30	3.79
	1.20 + 1.80 + 3.50	1.16 + 1.74 + 3.39	6.30	2,020	8.90	3.12	1.42 + 1.98 + 3.80	7.20	1,900	8.30	3.79
	1.20 + 1.80 + 5.00	0.95 + 1.42 + 3.94	6.30	2,095	9.20	3.01	1.20 + 1.67 + 4.33	7.20	1,900	8.30	3.79
	1.20 + 2.50 + 2.50	1.20 + 2.50 + 2.50	6.20	2,020	8.90	3.07	1.35 + 2.93 + 2.93	7.20	1,900	8.30	3.79
	1.20 + 2.50 + 3.50	1.05 + 2.19 + 3.06	6.30	2,095	9.20	3.01	1.23 + 2.67 + 3.29	7.20	1,900	8.30	3.79
	1.20 + 3.50 + 3.50	0.92 + 2.69 + 2.69	6.30	2,095	9.20	3.01	1.14 + 3.03 + 3.03	7.20	1,900	8.30	3.79
	1.80 + 1.80 + 1.80	1.80 + 1.80 + 1.80	5.40	1,780	7.80	3.03	2.33 + 2.33 + 2.33	7.00	1,850	8.20	3.78
	1.80 + 1.80 + 2.50	1.80 + 1.80 + 2.50	6.10	2,020	8.90	3.02	2.00 + 2.00 + 3.20	7.20	1,900	8.40	3.79
	1.80 + 1.80 + 3.50	1.60 + 1.60 + 3.10	6.30	2,095	9.20	3.01	1.85 + 1.85 + 3.50	7.20	1,900	8.40	3.79
	1.80 + 1.80 + 5.00	1.30 + 1.30 + 3.70	6.30	2,095	9.20	3.01	1.60 + 1.60 + 4.00	7.20	1,900	8.40	3.79
	1.80 + 2.50 + 2.50	1.70 + 2.30 + 2.30	6.30	2,095	9.20	3.01	1.80 + 2.70 + 2.70	7.20	1,900	8.40	3.79
	1.80 + 2.50 + 3.50	1.50 + 2.00 + 2.80	6.30	2,095	9.20	3.01	1.60 + 2.50 + 3.10	7.20	1,900	8.40	3.79
	1.80 + 3.50 + 3.50	1.30 + 2.50 + 2.50	6.30	2,095	9.20	3.01	1.40 + 2.90 + 2.90	7.20	1,900	8.40	3.79
	2.50 + 2.50 + 2.50	2.10 + 2.10 + 2.10	6.30	2,095	9.20	3.01	2.40 + 2.40 + 2.40	7.20	1,900	8.40	3.79
	2.50 + 2.50 + 3.50	1.85 + 1.85 + 2.60	6.30	2,095	9.20	3.01	2.23 + 2.23 + 2.74	7.20	1,900	8.40	3.79



RAM 130NP2A

POSSIBLE COMBINATIONS		OUTDOOR UNIT					OUTDOOR UNIT				
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP
				INPUT POWER (W)	CURRENT 230V (A)				INPUT POWER (W)	CURRENT 230V (A)	
FOUR UNITS	1.20+1.20+1.20+1.20	1.20 + 1.20 + 1.20 + 1.20	4.80	1,380	6.10	3.48	1.80 + 1.80 + 1.80 + 1.80	7.20	1,960	8.60	3.67
	1.20+1.20+1.20+1.80	1.20 + 1.20 + 1.20 + 1.80	5.40	1,610	7.10	3.35	1.80 + 1.80 + 1.80 + 2.50	7.90	2,160	9.50	3.66
	1.20+1.80+1.20+1.80	1.20 + 1.80 + 1.20 + 1.80	6.00	1,840	8.10	3.26	1.80 + 2.50 + 1.80 + 2.50	8.60	2,360	10.40	3.64
	1.20+1.20+1.20+2.50	1.20 + 1.20 + 1.20 + 2.50	6.10	1,900	8.30	3.21	1.80 + 1.80 + 1.80 + 3.90	9.30	2,530	11.10	3.68
	1.20+2.50+1.20+2.50	1.20 + 2.50 + 1.20 + 2.50	7.40	2,420	10.60	3.06	1.80 + 3.90 + 1.80 + 3.90	11.40	3,100	13.60	3.68
	1.20+1.20+1.20+3.50	1.20 + 1.20 + 1.20 + 3.50	7.10	2,140	9.40	3.32	1.80 + 1.80 + 1.80 + 4.80	10.20	2,830	12.40	3.60
	1.20+3.50+1.20+3.50	1.20 + 3.50 + 1.20 + 3.50	9.40	2,900	12.70	3.24	1.80 + 4.80 + 1.80 + 4.80	13.20	3,700	16.20	3.57
	1.20+1.20+1.20+5.00	1.20 + 1.20 + 1.20 + 5.00	8.60	2,440	10.70	3.52	1.80 + 1.80 + 1.56 + 5.64	10.80	3,050	13.40	3.54
	1.20+5.00+1.20+5.00	1.20 + 5.00 + 1.20 + 5.00	12.40	3,500	15.40	3.54	1.56 + 5.64 + 1.56 + 5.64	14.40	4,140	16.20	3.48
	1.80+1.80+1.80+1.80	1.80 + 1.80 + 1.80 + 1.80	7.20	2,380	10.50	3.03	2.50 + 2.50 + 2.50 + 2.50	10.00	2,920	12.80	3.42
	1.80+1.80+1.80+2.50	1.80 + 1.80 + 1.80 + 2.40	7.80	2,500	11.00	3.12	2.50 + 2.50 + 2.40 + 3.80	11.20	3,280	14.40	3.41
	1.80+2.50+1.80+2.50	1.80 + 2.40 + 1.80 + 2.40	8.40	2,620	11.50	3.21	2.40 + 3.80 + 2.40 + 3.80	12.40	3,640	16.00	3.41
	1.80+1.80+1.80+3.50	1.80 + 1.80 + 1.70 + 3.30	8.60	2,840	12.50	3.03	2.50 + 2.50 + 2.30 + 4.50	11.80	3,455	15.20	3.42
	1.80+2.50+1.80+3.50	1.80 + 2.40 + 1.70 + 3.30	9.20	2,960	13.00	3.11	2.40 + 3.80 + 2.30 + 4.50	13.00	3,815	16.80	3.41
	1.80+1.80+1.80+5.00	1.80 + 1.80 + 1.40 + 4.00	9.00	2,985	13.10	3.02	2.50 + 2.50 + 2.00 + 5.00	12.00	3,510	15.40	3.42
	1.80+2.50+1.80+5.00	1.80 + 2.40 + 1.40 + 4.00	9.60	3,105	13.60	3.09	2.40 + 3.80 + 2.00 + 5.00	13.20	3,870	17.00	3.41
	1.80+3.50+1.80+3.50	1.70 + 3.30 + 1.70 + 3.30	10.00	3,300	14.50	3.03	2.30 + 4.50 + 2.30 + 4.50	13.60	3,990	17.50	3.41
	1.80+3.50+1.80+5.00	1.70 + 3.30 + 1.40 + 4.00	10.40	3,445	15.10	3.02	2.30 + 4.50 + 2.00 + 5.00	13.80	4,045	17.80	3.41
	1.80+5.00+1.80+5.00	1.40 + 4.00 + 1.40 + 4.00	10.80	3,590	15.80	3.01	2.00 + 5.00 + 2.00 + 5.00	14.00	4,100	18.00	3.41
	1.80+2.50+2.50+2.50	1.80 + 2.40 + 2.50 + 2.50	9.20	2,960	13.00	3.11	2.40 + 3.80 + 3.40 + 3.40	13.00	3,835	16.80	3.39
	1.80+5.00+2.50+2.50	1.40 + 4.00 + 2.50 + 2.50	10.40	3,445	15.10	3.02	2.00 + 5.00 + 3.40 + 3.40	13.80	4,065	17.90	3.39
	1.80+3.50+2.50+2.50	1.70 + 3.30 + 2.50 + 2.50	10.00	3,300	14.50	3.03	2.30 + 4.50 + 3.40 + 3.40	13.60	4,010	17.60	3.39
	1.80+3.50+2.50+3.50	1.70 + 3.30 + 2.17 + 3.03	10.20	3,380	14.80	3.02	2.30 + 4.50 + 3.15 + 3.85	13.80	4,065	17.90	3.39
	1.80+5.00+2.50+3.50	1.40 + 4.00 + 2.17 + 3.03	10.60	3,525	15.50	3.01	2.00 + 5.00 + 3.15 + 3.85	14.00	4,120	18.10	3.40
	1.80+5.00+2.50+5.00	1.40 + 4.00 + 1.80 + 3.60	10.80	3,590	15.80	3.01	2.00 + 5.00 + 2.70 + 4.50	14.20	4,160	18.30	3.41
	1.80+3.50+3.50+3.50	1.70 + 3.30 + 2.70 + 2.70	10.40	3,445	15.10	3.02	2.30 + 4.50 + 3.60 + 3.60	14.00	4,105	18.00	3.41
	1.80+5.00+3.50+3.50	1.40 + 4.00 + 2.70 + 2.70	10.80	3,590	15.80	3.01	2.00 + 5.00 + 3.60 + 3.60	14.20	4,160	18.30	3.41
	1.80+5.00+3.50+5.00	1.40 + 4.00 + 2.50 + 3.50	11.40	3,790	16.60	3.01	2.00 + 5.00 + 3.05 + 4.15	14.20	4,160	18.30	3.41
	2.50+2.50+2.50+2.50	2.50 + 2.50 + 2.50 + 2.50	10.00	3,300	14.50	3.03	3.40 + 3.40 + 3.40 + 3.40	13.60	4,030	17.70	3.37
	2.50+2.50+2.50+3.50	2.50 + 2.50 + 2.17 + 3.03	10.20	3,380	14.80	3.02	3.40 + 3.40 + 3.15 + 3.85	13.80	4,085	17.90	3.38
	2.50+2.50+2.50+5.00	2.50 + 2.50 + 1.80 + 3.60	10.40	3,445	15.10	3.02	3.40 + 3.40 + 2.70 + 4.50	14.00	4,125	18.10	3.39
	2.50+3.50+2.50+3.50	2.17 + 3.03 + 2.17 + 3.03	10.40	3,460	15.20	3.01	3.15 + 3.85 + 3.15 + 3.85	14.00	4,140	18.20	3.38
	2.50+5.00+2.50+3.50	1.80 + 3.60 + 2.17 + 3.03	10.60	3,525	15.50	3.01	2.70 + 4.50 + 3.15 + 3.85	14.20	4,180	18.40	3.40
	2.50+5.00+2.50+5.00	1.80 + 3.60 + 1.80 + 3.60	10.80	3,590	15.80	3.01	2.70 + 4.50 + 2.70 + 4.50	14.40	4,220	18.50	3.41
	2.50+3.50+3.50+3.50	2.17 + 3.03 + 2.70 + 2.70	10.60	3,525	15.50	3.01	3.15 + 3.85 + 3.60 + 3.60	14.20	4,180	18.40	3.40
	2.50+5.00+3.50+3.50	1.80 + 3.60 + 2.70 + 2.70	10.80	3,590	15.80	3.01	2.70 + 4.50 + 3.60 + 3.60	14.40	4,220	18.50	3.41
	3.50+3.50+3.50+3.50	2.70 + 2.70 + 2.70 + 2.70	10.80	3,590	15.80	3.01	3.60 + 3.60 + 3.60 + 3.60	14.40	4,220	18.50	3.41
	3.50+3.50+3.50+5.00	2.70 + 2.70 + 2.50 + 3.50	11.40	3,790	16.60	3.01	3.60 + 3.60 + 3.05 + 4.15	14.40	4,220	18.50	3.41
	3.50+5.00+3.50+5.00	2.50 + 3.50 + 2.50 + 3.50	12.00	3,990	17.50	3.01	3.05 + 4.15 + 3.05 + 4.15	14.40	4,220	18.50	3.41



Multi Split

Multi Combinations

RAM 130NP6A											
POSSIBLE COMBINATIONS		COOLING									
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP
				INPUT POWER (W)	CURRENT (A) 230 V				INPUT POWER (W)	CURRENT (A) 230 V	
FIVE UNITS	1.2+1.2+1.2+1.2+1.2	1.20+1.20+1.20+1.20+1.20	6.00	1,770	7.80	3.39	1.80+1.80+1.80+1.80+1.80	9.00	2,460	10.80	3.66
	1.2+1.2+1.2+1.2+1.8	1.20+1.20+1.20+1.20+1.80	6.60	1,940	8.50	3.40	1.80+1.80+1.80+1.80+2.50	9.70	2,560	11.20	3.79
	1.2+1.2+1.2+1.2+2.5	1.20+1.20+1.20+1.20+2.50	7.30	2,140	9.40	3.41	1.80+1.80+1.73+1.73+3.74	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+1.2+3.5	1.20+1.20+1.20+1.20+3.50	8.30	2,215	9.70	3.75	1.80+1.80+1.54+1.54+4.11	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+1.2+5.0	1.20+1.20+1.02+1.02+4.26	8.70	2,785	12.20	3.12	1.80+1.80+1.28+1.28+4.63	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+1.8+1.8	1.20+1.20+1.20+1.80+1.80	7.20	2,110	9.30	3.41	1.80+1.80+1.80+2.50+2.50	10.40	2,730	12.00	3.81
	1.2+1.2+1.2+1.8+2.5	1.20+1.20+1.20+1.80+2.50	7.90	2,470	10.80	3.20	1.80+1.80+1.58+2.20+3.42	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+1.8+3.5	1.20+1.20+1.16+1.74+3.39	8.70	2,710	11.90	3.21	1.80+1.80+1.42+1.99+3.80	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+1.8+5.0	1.20+1.20+0.95+1.42+3.94	8.70	2,785	12.20	3.12	1.80+1.80+1.20+1.67+4.33	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+2.5+2.5	1.20+1.20+1.20+2.50+2.50	8.60	2,710	11.90	3.17	1.80+1.80+1.35+2.93+2.93	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+2.5+3.5	1.20+1.20+3.05+2.19+3.06	8.70	2,785	12.20	3.12	1.80+1.80+1.23+2.67+3.29	10.80	2,880	12.60	3.75
	1.2+1.2+1.2+3.5+3.5	1.20+1.20+0.92+2.69+2.69	8.70	2,785	12.20	3.12	1.80+1.80+1.13+3.03+3.03	10.80	2,880	12.60	3.75
	1.2+1.2+1.8+1.8+1.8	1.20+1.20+1.80+1.80+1.80	7.80	2,470	10.80	3.16	1.80+1.80+2.33+2.33+2.33	10.80	2,830	12.40	3.75
	1.2+1.2+1.8+1.8+2.5	1.20+1.20+1.80+1.80+2.50	8.50	2,710	11.90	3.14	1.80+1.80+2.00+2.00+3.20	10.80	2,880	12.60	3.75
	1.2+1.2+1.8+1.8+3.5	1.20+1.20+1.60+1.60+3.10	8.70	2,785	12.20	3.12	1.80+1.80+1.85+1.85+3.50	10.80	2,880	12.60	3.75
	1.2+1.2+1.8+1.8+5.0	1.20+1.20+1.30+1.30+3.70	8.70	2,785	12.20	3.12	1.80+1.80+1.60+1.60+4.00	10.80	2,880	12.60	3.75
	1.2+1.2+1.8+2.5+2.5	1.20+1.20+1.70+2.30+2.30	8.70	2,785	12.20	3.12	1.80+1.80+1.80+2.70+2.70	10.80	2,880	12.60	3.75
	1.2+1.2+1.8+2.5+3.5	1.20+1.20+1.50+2.00+2.80	8.70	2,785	12.20	3.12	1.80+1.80+1.60+1.60+3.10	10.80	2,880	12.60	3.75
	1.2+1.2+1.8+3.5+3.5	1.20+1.20+1.30+2.50+2.50	8.70	2,785	12.20	3.12	1.80+1.80+1.40+2.90+2.90	10.80	2,880	12.60	3.75
	1.2+1.2+2.5+2.5+2.5	1.20+1.20+2.10+2.10+2.10	8.70	2,785	12.20	3.12	1.80+1.80+2.40+2.40+2.40	10.80	2,880	12.60	3.75
	1.2+1.2+2.5+2.5+3.5	1.20+1.20+1.85+1.85+2.60	8.70	2,785	12.20	3.12	1.80+1.80+2.23+2.23+2.74	10.80	2,880	12.60	3.75
	1.2+1.8+1.2+1.2+1.2	1.20+1.80+1.20+1.20+1.20	6.60	2,000	8.80	3.30	1.80+2.50+1.80+1.80+1.80	9.70	2,660	11.70	3.65
	1.2+1.8+1.2+1.2+1.8	1.20+1.80+1.20+1.20+1.80	7.20	2,170	9.50	3.32	1.80+2.50+1.80+1.80+2.50	10.40	2,760	12.10	3.77
	1.2+1.8+1.2+1.2+2.5	1.20+1.80+1.20+1.20+2.50	7.90	2,370	10.40	3.33	1.80+2.50+1.72+1.72+3.74	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+1.2+3.5	1.20+1.80+1.20+1.20+3.50	8.90	2,445	10.70	3.64	1.80+2.50+1.54+1.54+4.11	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+1.2+5.0	1.20+1.80+1.02+1.02+4.26	9.30	3,015	13.20	3.08	1.80+2.50+1.28+1.28+4.63	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+1.8+1.8	1.20+1.80+1.20+1.80+1.80	7.80	2,340	10.30	3.33	1.80+2.50+1.80+2.50+2.50	11.10	2,930	12.90	3.79
	1.2+1.8+1.2+1.8+2.5	1.20+1.80+1.20+1.80+2.50	8.50	2,700	11.90	3.15	1.80+2.50+1.58+2.19+3.42	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+1.8+3.5	1.20+1.80+1.16+1.74+3.39	9.30	2,940	12.90	3.16	1.80+2.50+1.42+1.98+3.80	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+1.8+5.0	1.20+1.80+0.95+1.42+3.94	9.30	3,015	13.20	3.08	1.80+2.50+1.20+1.66+4.33	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+2.5+2.5	1.20+1.80+1.20+2.50+2.50	9.20	2,940	12.90	3.13	1.80+2.50+1.35+2.92+2.92	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+2.5+3.5	1.20+1.80+1.05+2.19+3.06	9.30	3,015	13.20	3.08	1.80+2.50+1.23+2.67+3.29	11.50	3,080	13.50	3.73
	1.2+1.8+1.2+3.5+3.5	1.20+1.80+0.92+2.69+2.69	9.30	3,015	13.20	3.08	1.80+2.50+1.14+3.03+3.03	11.50	3,080	13.50	3.73
	1.2+1.8+1.8+1.8+1.8	1.20+1.80+1.80+1.80+1.80	8.40	2,700	11.90	3.11	1.80+2.50+2.33+2.33+2.33	11.30	3,030	13.30	3.73
	1.2+1.8+1.8+1.8+2.5	1.20+1.80+1.80+1.80+2.50	9.10	2,940	12.90	3.10	1.80+2.50+2.00+2.00+3.20	11.50	3,080	13.50	3.73
	1.2+1.8+1.8+1.8+3.5	1.20+1.80+1.60+1.60+3.10	9.30	3,015	13.20	3.08	1.80+2.50+1.85+1.85+3.50	11.50	3,080	13.50	3.73
	1.2+1.8+1.8+1.8+5.0	1.20+1.80+1.30+1.30+3.70	9.30	3,015	13.20	3.08	1.80+2.50+1.60+1.60+4.00	11.50	3,080	13.50	3.73
	1.2+1.8+1.8+2.5+2.5	1.20+1.80+1.70+2.30+2.30	9.30	3,015	13.20	3.08	1.80+2.50+1.80+2.70+2.70	11.50	3,080	13.50	3.73
	1.2+1.8+1.8+2.5+3.5	1.20+1.80+1.50+2.00+2.80	9.30	3,015	13.20	3.08	1.80+2.50+1.60+2.50+3.10	11.50	3,080	13.50	3.73
	1.2+1.8+1.8+3.5+3.5	1.20+1.80+1.30+2.50+2.50	9.30	3,015	13.20	3.08	1.80+2.50+1.40+2.90+2.90	11.50	3,080	13.50	3.73
	1.2+1.8+2.5+2.5+2.5	1.20+1.80+2.10+2.10+2.10	9.30	3,015	13.20	3.08	1.80+2.50+2.40+2.40+2.40	11.50	3,080	13.50	3.73
	1.2+1.8+2.5+2.5+3.5	1.20+1.80+1.85+1.85+2.60	9.30	3,015	13.20	3.08	1.80+2.50+2.23+2.23+2.74	11.50	3,080	13.50	3.73
	1.2+2.5+1.2+1.2+1.2	1.20+2.50+1.20+1.20+1.20	7.30	2,290	10.10	3.19	1.80+3.90+1.80+1.80+1.80	11.10	3,030	13.30	3.66
	1.2+2.5+1.2+1.2+1.8	1.20+2.50+1.20+1.20+1.80	7.90	2,460	10.80	3.21	1.80+3.90+1.80+1.80+2.50	11.80	3,130	13.70	3.77
	1.2+2.5+1.2+1.2+2.5	1.20+2.50+1.20+1.20+2.50	8.60	2,660	11.70	3.23	1.80+3.90+1.73+1.73+3.74	12.90	3,450	15.20	3.74
	1.2+2.5+1.2+1.2+3.5	1.20+2.50+1.20+1.20+3.50	9.60	2,735	12.00	3.51	1.80+3.90+1.54+1.54+4.11	12.90	3,450	15.20	3.74
	1.2+2.5+1.2+1.2+5.0	1.20+2.50+1.02+1.02+4.26	10.00	3,305	14.50	3.03	1.80+3.90+1.28+1.28+4.63	12.90	3,450	15.20	3.74
	1.2+2.5+1.2+1.8+1.8	1.20+2.50+1.20+1.80+1.80	8.50	2,630	11.60	3.23	1.80+3.90+1.80+2.50+2.50	12.50	3,300	14.50	3.79
	1.2+2.5+1.2+1.8+2.5	1.20+2.50+1.20+1.80+2.50	9.20	2,990	13.10	3.08	1.80+3.90+1.58+2.19+3.42	12.90	3,450	15.20	3.74
	1.2+2.5+1.2+1.8+3.5	1.20+2.50+1.16+1.74+3.39	10.00	3,230	14.20	3.10	1.80+3.90+1.42+1.98+3.80	12.90	3,450	15.20	3.74
	1.2+2.5+1.2+1.8+5.0	1.20+2.50+0.95+1.42+3.94	10.00	3,305	14.580	3.03	1.80+3.90+1.20+1.67+4.33	12.90	3,450	15.20	3.74
	1.2+2.5+1.2+2.5+2.5	1.20+2.50+1.20+2.50+2.50	9.90	3,230	14.20	3.07	1.80+3.90+1.35+2.92+2.92	12.90	3,450	15.20	3.74



RAM 130NP6A												
POSSIBLE COMBINATIONS		COOLING										
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP	
				INPUT POWER (W)	CURRENT (A) 230 V				INPUT POWER (W)	CURRENT (A) 230 V		
FIVE UNITS	1.2+2.5+1.2+2.5+3.5	1.20+2.50+1.05+2.19+3.06	10.00	3,305	14.50	3.03	1.80+3.90+1.23+2.67+3.29	12.90	3,450	10.20	3.74	
	1.2+2.5+1.2+3.5+3.5	1.20+2.50+0.92+2.69+2.69	10.00	3,305	14.50	3.03	1.80+3.90+1.14+3.03+3.03	12.90	3,450	15.20	3.74	
	1.2+2.5+1.8+1.8+1.8	1.20+2.50+1.80+1.80+1.80	9.10	2,990	13.10	3.04	1.80+3.90+2.33+2.33+2.33	12.70	3,400	14.90	3.74	
	1.2+2.5+1.8+1.8+2.5	1.20+2.50+1.80+1.80+2.50	9.80	3,230	14.20	3.03	1.80+3.90+2.00+2.00+3.20	12.90	3,450	15.20	3.74	
	1.2+2.5+1.8+1.8+3.5	1.20+2.50+1.60+1.60+3.10	10.00	3,305	14.50	3.03	1.80+3.90+1.85+1.85+3.50	12.90	3,450	15.20	3.74	
	1.2+2.5+1.8+1.8+5.0	1.20+2.50+1.30+1.30+3.70	10.00	3,305	14.50	3.03	1.80+3.90+1.60+1.60+4.00	12.90	3,450	15.20	3.74	
	1.2+2.5+1.8+2.5+2.5	1.20+2.50+1.70+2.30+2.30	10.00	3,305	14.50	3.03	1.80+3.90+1.80+2.70+2.70	12.90	3,450	15.20	3.74	
	1.2+2.5+1.8+2.5+3.5	1.20+2.50+1.50+2.00+2.80	10.00	3,305	14.50	3.03	1.80+3.90+1.60+2.50+3.10	12.90	3,450	15.20	3.74	
	1.2+2.5+1.8+3.5+3.5	1.20+2.50+1.30+2.50+2.50	10.00	3,305	14.50	3.03	1.80+3.90+1.40+2.90+2.90	12.90	3,450	15.20	3.74	
	1.2+2.5+2.5+2.5+2.5	1.20+2.50+2.10+2.10+2.10	10.00	3,305	14.50	3.03	1.80+3.90+2.40+2.40+2.40	12.90	3,450	15.20	3.74	
	1.2+2.5+2.5+2.5+3.5	1.20+2.50+1.85+1.85+2.60	10.00	3,305	14.50	3.03	1.80+3.90+2.23+2.23+2.74	12.90	3,450	15.20	3.74	
	1.2+3.5+1.2+1.2+1.2	1.20+3.50+1.20+1.20+1.20	8.30	2,530	11.10	3.28	1.80+4.80+1.80+1.80+1.80	12.00	3,330	14.60	3.60	
	1.2+3.5+1.2+1.2+1.8	1.20+3.50+1.20+1.20+1.80	8.90	2,700	11.90	3.30	1.80+4.80+1.80+1.80+2.50	12.70	3,430	15.10	3.70	
	1.2+3.5+1.2+1.2+2.5	1.20+3.50+1.20+1.20+2.50	9.60	2,900	12.70	3.31	1.80+4.80+1.73+1.73+3.74	13.80	3,750	16.50	3.68	
	1.2+3.5+1.2+1.2+3.5	1.20+3.50+1.20+1.20+3.50	10.60	2,975	13.10	3.56	1.80+4.80+1.54+1.54+4.11	13.80	3,750	16.50	3.68	
	1.2+3.5+1.2+1.2+5.0	1.20+3.50+1.02+1.02+4.26	11.00	3,545	15.60	3.10	1.80+4.80+1.28+1.28+4.63	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+1.8+1.8	1.20+3.50+1.20+1.80+1.80	9.50	2,870	12.60	3.31	1.80+4.80+1.80+2.50+2.50	13.40	3,600	15.80	3.72	
	1.2+3.5+1.8+1.8+2.5	1.20+3.50+1.20+1.80+2.50	10.20	3,230	14.20	3.16	1.80+4.80+1.58+2.20+3.42	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+1.8+3.5	1.20+3.50+1.16+1.74+3.39	11.00	3,470	15.20	3.17	1.80+4.80+1.42+1.98+3.80	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+1.8+5.0	1.20+3.50+0.95+1.42+3.94	11.00	3,545	15.60	3.10	1.80+4.80+1.20+1.67+4.33	13.80	3,750	16.50	3.68	
	1.2+3.5+1.2+2.5+2.5	1.20+3.50+1.20+2.50+2.50	10.90	3,470	15.20	3.14	1.80+4.80+1.35+2.93+2.93	13.80	3,750	16.50	3.68	
	1.2+3.5+1.2+2.5+3.5	1.20+3.50+1.05+2.19+3.06	11.00	3,545	15.60	3.10	1.80+4.80+1.23+2.67+3.29	13.80	3,750	16.50	3.68	
	1.2+3.5+1.2+3.5+3.5	1.20+3.50+0.92+2.69+2.69	11.00	3,545	15.60	3.10	1.80+4.80+1.14+3.03+3.03	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+1.8+1.8	1.20+3.50+1.80+1.80+1.80	10.10	3,230	14.20	3.13	1.80+4.80+2.33+2.33+2.33	13.60	3,700	16.20	3.68	
	1.2+3.5+1.8+1.8+2.5	1.20+3.50+1.80+1.80+2.50	10.80	3,470	15.20	3.11	1.80+4.80+2.00+2.00+3.20	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+1.8+3.5	1.20+3.50+1.60+1.60+3.10	11.00	3,545	15.60	3.10	1.80+4.80+1.85+1.85+3.50	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+1.8+5.0	1.20+3.50+1.30+1.30+3.70	11.00	3,545	15.60	3.10	1.80+4.80+1.60+1.60+4.00	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+2.5+2.5	1.20+3.50+1.70+2.30+2.30	11.00	3,545	15.60	3.10	1.80+4.80+1.80+2.70+2.70	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+2.5+3.5	1.20+3.50+1.50+2.00+2.80	11.00	3,545	15.60	3.10	1.80+4.80+1.60+2.50+3.10	13.80	3,750	16.50	3.68	
	1.2+3.5+1.8+3.5+3.5	1.20+3.50+1.30+2.50+2.50	11.00	3,545	15.60	3.10	1.80+4.80+1.40+2.90+2.90	13.80	3,750	16.50	3.68	
	1.2+3.5+2.5+2.5+2.5	1.20+3.50+2.10+2.10+2.10	11.00	3,545	15.60	3.10	1.80+4.80+2.40+2.40+2.40	13.80	3,750	16.50	3.68	
	1.2+3.5+2.5+2.5+3.5	1.20+3.50+1.85+1.85+2.60	11.00	3,545	15.60	3.10	1.80+4.80+2.23+2.23+2.74	13.80	3,750	16.50	3.68	
	1.2+5.0+1.2+1.2+1.2	1.20+5.00+1.20+1.20+1.20	9.80	2,830	12.40	3.46	1.56+5.64+1.80+1.80+1.80	12.60	3,330	14.60	3.78	
	1.2+5.0+1.2+1.2+1.8	1.20+5.00+1.20+1.20+1.80	10.40	3,000	13.20	3.47	1.56+5.64+1.80+1.80+2.50	13.30	3,430	15.10	3.88	
	1.2+5.0+1.2+1.2+2.5	1.20+5.00+1.20+1.20+2.50	11.10	3,200	14.10	3.47	1.56+5.64+1.73+1.73+3.74	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+1.2+3.5	1.20+5.00+1.20+1.20+3.50	12.10	3,275	14.40	3.69	1.56+5.64+1.54+1.54+4.11	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+1.2+5.0	1.20+5.00+1.02+1.02+4.26	12.50	3,845	16.90	3.25	1.56+5.64+1.28+1.28+4.63	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+1.8+1.8	1.20+5.00+1.20+1.80+1.80	11.00	3,170	13.90	3.47	1.56+5.64+1.80+2.50+2.50	14.00	3,600	15.80	3.89	
	1.2+5.0+1.2+1.8+2.5	1.20+5.00+1.20+1.80+2.50	11.70	3,530	15.50	3.31	1.56+5.64+1.58+2.20+3.42	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+1.8+3.5	1.20+5.00+1.16+1.74+3.39	12.50	3,770	16.60	3.32	1.56+5.64+1.42+1.98+3.80	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+1.8+5.0	1.20+5.00+0.95+1.42+3.94	12.50	3,845	16.90	3.25	1.56+5.64+1.20+1.67+4.33	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+2.5+2.5	1.20+5.00+1.20+2.50+2.50	12.40	3,770	16.60	3.29	1.56+5.64+1.35+2.93+2.93	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+2.5+3.5	1.20+5.00+1.05+2.19+3.06	12.50	3,845	16.90	3.25	1.56+5.64+1.23+2.67+3.29	14.40	3,750	16.50	3.84	
	1.2+5.0+1.2+3.5+3.5	1.20+5.00+0.92+2.69+2.69	12.50	3,845	16.90	3.25	1.56+5.64+1.14+3.03+3.03	14.40	3,750	16.50	3.84	
	1.2+5.0+1.8+1.8+1.8	1.20+5.00+1.80+1.80+1.80	11.60	3,530	15.50	3.29	1.56+5.64+2.33+2.33+2.33	14.20	3,700	16.20	3.84	
	1.2+5.0+1.8+1.8+2.5	1.20+5.00+1.80+1.80+2.50	12.30	3,770	16.60	3.26	1.56+5.64+2.00+2.00+3.20	14.40	3,750	16.50	3.84	
	1.2+5.0+1.8+1.8+3.5	1.20+5.00+1.60+1.60+3.10	12.50	3,845	16.90	3.25	1.56+5.64+1.85+1.85+3.50	14.40	3,750	16.50	3.84	
	1.2+5.0+1.8+1.8+5.0	1.20+5.00+1.30+1.30+3.70	12.50	3,845	16.90	3.25	1.56+5.64+1.60+1.60+4.00	14.40	3,750	16.50	3.84	
	1.2+5.0+1.8+2.5+2.5	1.20+5.00+1.70+2.30+2.30	12.50	3,845	16.90	3.25	1.56+5.64+1.80+2.70+2.70	14.40	3,750	16.50	3.84	
	1.2+5.0+1.8+2.5+3.5	1.20+5.00+1.50+2.00+2.80	12.50	3,845	16.90	3.25	1.56+5.64+1.60+2.50+3.10	14.40	3,750	16.50	3.84	
	1.2+5.0+1.8+3.5+3.5	1.20+5.00+1.30+2.50+2.50	12.50	3,845	16.90	3.25	1.56+5.64+1.40+2.90+2.90	14.40	3,750	16.50	3.84	
	1.2+5.0+2.5+2.5+2.5	1.20+5.00+2.10+2.10+2.10	12.50	3,845	16.90	3.25	1.56+5.64+2.40+2.40+2.40	14.40	3,750	16.50	3.84	
	1.2+5.0+2.5+2.5+3.5	1.20+5.00+1.85+1.85+2.60	12.50	3,845	16.90	3.25	1.56+5.64+2.23+2.23+2.74	14.40	3,750	16.50	3.84	



Multi Combinations

RAM 130NP6A											
POSSIBLE COMBINATIONS		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP
				INPUT POWER (W)	CURRENT 230V (A)				INPUT POWER (W)	CURRENT 230V (A)	
FIVE UNITS	1.8 + 1.8 + 1.8 + 1.8 + 1.8	1.80 + 1.80 + 1.80 + 1.80 + 1.80	9.00	2,970	13.00	3.03	2.50 + 2.50 + 2.33 + 2.33 + 2.33	12.00	3,310	14.50	3.63
	1.8 + 1.8 + 1.8 + 1.8 + 2.5	1.80 + 1.80 + 1.80 + 1.80 + 2.50	9.70	3,210	14.10	3.02	2.50 + 2.50 + 2.00 + 2.00 + 3.20	12.20	3,360	14.80	3.63
	1.8 + 3.5 + 1.8 + 1.8 + 1.8	1.70 + 3.30 + 1.80 + 1.80 + 1.80	10.40	3,430	15.10	3.03	2.30 + 4.50 + 2.33 + 2.33 + 2.33	13.80	3,845	16.90	3.59
	1.8 + 5.0 + 1.8 + 1.8 + 1.8	1.40 + 4.00 + 1.80 + 1.80 + 1.80	10.80	3,575	15.70	3.02	2.00 + 5.00 + 2.33 + 2.33 + 2.33	14.00	3,900	17.10	3.59
	1.8 + 2.5 + 1.8 + 1.8 + 2.5	1.80 + 2.40 + 1.80 + 1.80 + 2.50	10.30	3,330	14.60	3.09	2.40 + 3.80 + 2.00 + 2.00 + 3.20	13.40	3,720	16.30	3.60
	1.8 + 3.5 + 1.8 + 1.8 + 2.5	1.70 + 3.30 + 1.80 + 1.80 + 2.50	11.10	3,670	16.10	3.02	2.30 + 4.50 + 2.00 + 2.00 + 3.20	14.00	3,895	17.10	3.59
	1.8 + 5.0 + 1.8 + 1.8 + 2.5	1.40 + 4.00 + 1.80 + 1.80 + 2.50	11.50	3,815	16.80	3.01	2.00 + 5.00 + 2.00 + 2.00 + 3.20	14.20	3,950	17.30	3.59
	1.8 + 3.5 + 1.8 + 1.8 + 3.5	1.70 + 3.30 + 1.60 + 1.60 + 3.10	11.30	3,745	16.40	3.02	2.30 + 4.50 + 1.85 + 1.85 + 3.50	14.00	3,895	17.10	3.59
	1.8 + 5.0 + 1.8 + 1.8 + 3.5	1.40 + 4.00 + 1.60 + 1.60 + 3.10	11.70	3,890	17.10	3.01	2.00 + 5.00 + 1.85 + 1.85 + 3.50	14.20	3,950	17.30	3.59
	1.8 + 5.0 + 1.8 + 1.8 + 5.0	1.40 + 4.00 + 1.30 + 1.30 + 3.70	11.70	3,890	17.10	3.01	2.00 + 5.00 + 1.60 + 1.60 + 4.00	14.20	3,950	17.30	3.59
	2.5 + 2.5 + 1.8 + 1.8 + 2.5	2.50 + 2.50 + 1.80 + 1.80 + 2.50	11.10	3,670	16.10	3.02	3.40 + 3.40 + 2.00 + 2.00 + 3.20	14.00	3,915	17.20	3.58
	2.5 + 3.5 + 1.8 + 1.8 + 2.5	2.17 + 3.03 + 1.80 + 1.80 + 2.50	11.30	3,750	16.50	3.01	3.15 + 3.85 + 2.00 + 2.00 + 3.20	14.20	3,970	17.40	3.58
	1.8 + 5.0 + 1.8 + 2.5 + 2.5	1.40 + 4.00 + 1.70 + 2.30 + 2.30	11.70	3,890	17.10	3.01	2.00 + 5.00 + 1.80 + 2.70 + 2.70	14.20	3,950	17.30	3.59
	3.5 + 3.5 + 1.8 + 1.8 + 2.5	2.70 + 2.70 + 1.80 + 1.80 + 2.50	11.50	3,815	16.80	3.01	3.60 + 3.60 + 2.00 + 2.00 + 3.20	14.40	4,010	17.60	3.59
	1.8 + 5.0 + 1.8 + 2.5 + 3.5	1.40 + 4.00 + 1.50 + 2.00 + 2.80	11.70	3,890	17.10	3.01	2.00 + 5.00 + 1.60 + 2.50 + 3.10	14.20	3,950	17.30	3.59
	3.5 + 3.5 + 1.8 + 1.8 + 3.5	2.70 + 2.70 + 1.60 + 1.60 + 3.10	11.70	3,890	17.10	3.01	3.60 + 3.60 + 1.85 + 1.85 + 3.50	14.40	4,010	17.60	3.59
	2.5 + 2.5 + 1.8 + 2.5 + 2.5	2.50 + 2.50 + 1.70 + 2.30 + 2.30	11.30	3,745	16.40	3.02	3.40 + 3.40 + 1.80 + 2.70 + 2.70	14.00	3,915	17.20	3.58
	2.5 + 3.5 + 1.8 + 2.5 + 2.5	2.17 + 3.03 + 1.70 + 2.30 + 2.30	11.50	3,825	16.80	3.01	3.15 + 3.85 + 1.80 + 2.70 + 2.70	14.20	3,970	17.40	3.58
	1.8 + 5.0 + 2.5 + 2.5 + 2.5	1.40 + 4.00 + 2.10 + 2.10 + 2.10	11.70	3,890	17.10	3.01	2.00 + 5.00 + 2.40 + 2.40 + 2.40	14.20	3,950	17.30	3.59
	3.5 + 3.5 + 1.8 + 2.5 + 2.5	2.70 + 2.70 + 1.70 + 2.30 + 2.30	11.70	3,890	17.10	3.01	3.60 + 3.60 + 1.80 + 2.70 + 2.70	14.40	4,010	17.60	3.59
	2.5 + 5.0 + 1.8 + 2.5 + 3.5	1.80 + 3.60 + 1.50 + 2.00 + 2.80	11.70	3,890	17.10	3.01	2.70 + 4.50 + 1.60 + 2.50 + 3.10	14.40	4,010	17.60	3.59
	3.5 + 3.5 + 1.8 + 2.5 + 3.5	2.70 + 2.70 + 1.50 + 2.00 + 2.80	11.70	3,890	17.10	3.01	3.60 + 3.60 + 1.60 + 2.50 + 3.10	14.40	4,010	17.60	3.59
	3.5 + 3.5 + 1.8 + 3.5 + 3.5	2.70 + 2.70 + 1.30 + 2.50 + 2.50	11.70	3,890	17.10	3.01	3.60 + 3.60 + 1.40 + 2.90 + 2.90	14.40	4,010	17.60	3.59
	2.5 + 2.5 + 2.5 + 2.5 + 2.5	2.50 + 2.50 + 2.10 + 2.10 + 2.10	11.30	3,745	16.40	3.02	3.40 + 3.40 + 2.40 + 2.40 + 2.40	14.00	3,915	17.20	3.58
	2.5 + 3.5 + 2.5 + 2.5 + 2.5	2.17 + 3.03 + 2.10 + 2.10 + 2.10	11.50	3,825	16.80	3.01	3.15 + 3.85 + 2.40 + 2.40 + 2.40	14.20	3,970	17.40	3.58
	2.5 + 5.0 + 2.5 + 2.5 + 2.5	1.80 + 3.60 + 2.10 + 2.10 + 2.10	11.70	3,890	17.10	3.01	2.70 + 4.50 + 2.40 + 2.40 + 2.40	14.40	4,010	17.60	3.59
	3.5 + 3.5 + 2.5 + 2.5 + 2.5	2.70 + 2.70 + 2.10 + 2.10 + 2.10	11.70	3,890	17.10	3.01	3.60 + 3.60 + 2.40 + 2.40 + 2.40	14.40	4,010	17.60	3.59
	2.5 + 5.0 + 2.5 + 2.5 + 3.5	1.80 + 3.60 + 1.85 + 1.85 + 2.60	11.70	3,890	17.10	3.01	2.70 + 4.50 + 2.23 + 2.23 + 2.74	14.40	4,010	17.60	3.59
	3.5 + 3.5 + 2.5 + 2.5 + 3.5	2.70 + 2.70 + 1.85 + 1.85 + 2.60	11.70	3,890	17.10	3.01	3.60 + 3.60 + 2.23 + 2.23 + 2.74	14.40	4,010	17.60	3.59
	3.5 + 5.0 + 2.5 + 2.5 + 3.5	2.50 + 3.50 + 1.85 + 1.85 + 2.60	12.30	4,090	18.00	3.01	3.05 + 4.15 + 2.23 + 2.23 + 2.74	14.40	4,010	17.60	3.59



RAM 130NP6A												
POSSIBLE COMBINATIONS		COOLING										
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP	
				INPUT POWER (W)	CURRENT (A) 230 V				INPUT POWER (W)	CURRENT (A) 230 V		
SIX UNITS	1.2+1.2+1.2+1.2+1.2+1.2	1.20+1.20+1.20+1.20+1.20+1.20	7.20	2,160	9.50	3.33	1.80+1.80+1.80+1.80+1.80+1.80	10.80	2,960	13.00	3.65	
	1.2+1.2+1.2+1.2+1.2+1.8	1.20+1.20+1.20+1.20+1.20+1.80	7.80	2,330	10.20	3.35	1.80+1.80+1.80+1.80+1.80+2.50	11.50	3,060	13.40	3.76	
	1.2+1.2+1.2+1.2+1.2+2.5	1.20+1.20+1.20+1.20+1.20+2.50	8.50	2,530	11.10	3.36	1.80+1.80+1.80+1.73+1.73+3.74	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+1.2+3.5	1.20+1.20+1.20+1.20+1.20+3.50	9.50	2,605	11.40	3.65	1.80+1.80+1.80+1.54+1.54+4.11	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+1.2+5.0	1.20+1.20+1.20+1.02+1.02+4.26	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.28+1.28+4.63	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+1.8+1.8	1.20+1.20+1.20+1.20+1.80+1.80	8.40	2,500	11.00	3.36	1.80+1.80+1.80+1.80+2.50+2.50	12.20	3,230	14.20	3.78	
	1.2+1.2+1.2+1.2+1.8+2.5	1.20+1.20+1.20+1.20+1.80+2.50	9.10	2,860	12.60	3.18	1.80+1.80+1.80+1.58+2.20+3.42	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+1.8+3.5	1.20+1.20+1.20+1.16+1.74+3.39	9.90	3,100	13.60	3.19	1.80+1.80+1.80+1.42+1.98+3.80	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+1.8+5.0	1.20+1.20+1.20+0.95+1.42+3.94	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.20+1.67+4.33	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+2.5+2.5	1.20+1.20+1.20+1.20+2.50+2.50	9.80	3,100	13.60	3.16	1.80+1.80+1.80+1.35+2.93+2.93	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+2.5+3.5	1.20+1.20+1.20+1.05+2.19+3.06	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.23+2.67+3.29	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.2+3.5+3.5	1.20+1.20+1.20+0.92+2.69+2.69	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.14+3.03+3.03	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.8+1.8+1.8	1.20+1.20+1.20+1.80+1.80+1.80	9.00	2,860	12.60	3.15	1.80+1.80+1.80+2.33+2.33+2.33	12.40	3,330	14.60	3.72	
	1.2+1.2+1.2+1.8+1.8+2.5	1.20+1.20+1.20+1.80+1.80+2.50	9.70	3,100	13.60	3.13	1.80+1.80+1.80+2.00+2.00+3.20	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.8+1.8+3.5	1.20+1.20+1.20+1.60+1.60+3.10	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.85+1.85+3.50	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.8+1.8+5.0	1.20+1.20+1.20+1.30+1.30+3.70	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.60+1.60+4.00	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.8+2.5+2.5	1.20+1.20+1.20+1.70+2.30+2.30	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.80+2.70+2.70	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.8+2.5+3.5	1.20+1.20+1.20+1.50+2.00+2.80	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.60+2.50+6.10	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+1.8+3.5+3.5	1.20+1.20+1.20+1.30+2.50+2.50	9.90	3,175	13.90	3.12	1.80+1.80+1.80+1.40+2.90+2.90	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+2.5+2.5+2.5	1.20+1.20+1.20+2.10+2.10+2.10	9.90	3,175	13.90	3.12	1.80+1.80+1.80+2.40+2.40+2.40	12.60	3,380	14.80	3.73	
	1.2+1.2+1.2+2.5+2.5+3.5	1.20+1.20+1.20+1.85+1.85+2.60	9.90	3,175	13.90	3.12	1.80+1.80+1.80+2.23+2.23+2.74	12.60	3,380	14.80	3.73	
	1.2+1.2+1.8+1.2+1.2+1.2	1.20+1.20+1.80+1.20+1.20+1.20	7.80	2,330	10.20	3.35	1.80+1.80+2.50+1.80+1.80+1.80	11.50	3,060	13.40	3.76	
	1.2+1.2+1.8+1.2+1.2+1.8	1.20+1.20+1.80+1.20+1.20+1.80	8.40	2,500	11.00	3.36	1.80+1.80+2.50+1.80+1.80+2.50	12.20	3,160	13.90	3.86	
	1.2+1.2+1.8+1.2+1.2+2.5	1.20+1.20+1.80+1.20+1.20+2.50	9.10	2,700	11.90	3.37	1.80+1.80+2.50+1.73+1.73+3.74	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+1.2+3.5	1.20+1.20+1.80+1.20+1.20+3.50	10.10	2,775	12.20	3.64	1.80+1.80+2.50+1.54+1.54+4.11	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+1.2+5.0	1.20+1.20+1.80+1.02+1.02+4.26	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.28+1.28+4.63	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+1.8+1.8	1.20+1.20+1.80+1.20+1.80+1.80	9.00	2,670	11.70	3.37	1.80+1.80+2.50+1.80+2.50+2.50	12.90	3,330	14.60	3.87	
	1.2+1.2+1.8+1.2+1.8+2.5	1.20+1.20+1.80+1.20+1.80+2.50	9.70	3,030	13.30	3.20	1.80+1.80+2.50+1.58+2.20+3.42	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+1.8+3.5	1.20+1.20+1.80+1.16+1.74+3.39	10.50	3,270	14.40	3.21	1.80+1.80+2.50+1.42+1.98+3.80	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+1.8+5.0	1.20+1.20+1.80+0.95+1.42+3.94	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.20+1.67+4.33	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+2.5+2.5	1.20+1.20+1.80+1.20+2.50+2.50	10.40	3,270	14.40	3.18	1.80+1.80+2.50+1.35+2.93+2.93	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+2.5+3.5	1.20+1.20+1.80+1.05+2.19+3.06	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.23+2.67+3.29	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.2+3.5+3.5	1.20+1.20+1.80+0.92+2.69+2.69	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.14+3.03+3.03	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.8+1.8+1.8	1.20+1.20+1.80+1.80+1.80+1.80	9.60	3,030	13.30	3.17	1.80+1.80+2.50+2.33+2.33+2.33	13.10	3,430	15.10	3.82	
	1.2+1.2+1.8+1.8+1.8+2.5	1.20+1.20+1.80+1.80+1.80+2.50	10.30	3,270	14.40	3.15	1.80+1.80+2.50+2.00+2.00+3.20	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.8+1.8+3.5	1.20+1.20+1.80+1.60+1.60+3.10	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.85+1.85+3.50	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.8+1.8+5.0	1.20+1.20+1.80+1.30+1.30+3.70	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.60+1.60+4.00	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.8+2.5+2.5	1.20+1.20+1.80+1.70+2.30+2.30	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.80+2.70+2.70	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.8+2.5+3.5	1.20+1.20+1.80+1.50+2.00+2.80	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.60+2.50+3.10	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+1.8+3.5+3.5	1.20+1.20+1.80+1.30+2.50+2.50	10.50	3,345	14.70	3.14	1.80+1.80+2.50+1.40+2.90+2.90	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+2.5+2.5+2.5	1.20+1.20+1.80+2.10+2.10+2.10	10.50	3,345	14.70	3.14	1.80+1.80+2.50+2.40+2.40+2.40	13.30	3,480	15.30	3.82	
	1.2+1.2+1.8+2.5+2.5+3.5	1.20+1.20+1.80+1.85+1.85+2.60	10.50	3,345	14.70	3.14	1.80+1.80+2.50+2.23+2.23+2.74	13.30	3,480	15.30	3.82	
	1.2+1.2+2.5+1.2+1.2+1.2	1.20+1.20+2.50+1.20+1.20+1.20	8.50	2,530	11.10	3.36	1.73+1.73+3.74+1.80+1.80+1.80	12.60	3,380	14.80	3.73	
	1.2+1.2+2.5+1.2+1.2+1.8	1.20+1.20+2.50+1.20+1.20+1.80	9.10	2,700	11.90	3.37	1.73+1.73+3.74+1.80+1.80+2.50	13.30	3,480	15.30	3.82	
	1.2+1.2+2.5+1.2+1.2+2.5	1.20+1.20+2.50+1.20+1.20+2.50	9.80	2,900	12.70	3.38	1.73+1.73+3.74+1.73+1.73+3.74	14.40	3,800	16.70	3.79	
	1.2+1.2+2.5+1.2+1.2+3.5	1.20+1.20+2.50+1.20+1.20+3.50	10.80	2,975	13.10	3.63	1.73+1.73+3.74+1.54+1.54+4.11	14.40	3,800	16.70	3.79	
	1.2+1.2+2.5+1.2+1.2+5.0	1.20+1.20+2.50+1.02+1.02+4.26	11.20	2,545	15.60	3.16	1.73+1.73+3.74+1.28+1.28+4.63	14.40	3,800	16.70	3.79	
	1.2+1.2+2.5+1.2+1.8+1.8	1.20+1.20+2.50+1.20+1.80+1.80	9.70	2,870	12.60	3.38	1.73+1.73+3.74+1.80+2.50+2.50	14.00	3,650	16.00	3.84	
	1.2+1.2+2.5+1.2+1.8+2.5	1.20+1.20+2.50+1.20+1.80+2.50	10.40	3,230	14.20	3.22	1.73+1.73+3.74+1.58+2.20+3.42	14.40	3,800	16.70	3.79	
	1.2+1.2+2.5+1.2+1.8+3.5	1.20+1.20+2.50+1.16+1.74+3.39	11.20	3,470	15.20	3.23	1.73+1.73+3.74+1.42+1.98+3.80	14.40	3,800	16.70	3.79	
	1.2+1.2+2.5+1.2+1.8+5.0	1.20+1.20+2.50+0.95+1.42+3.94	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.20+1.67+4.33	14.40	3,800	16.70	3.79	
	1.2+1.2+2.5+1.2+2.5+2.5	1.20+1.20+2.50+1.20+2.50+2.50	11.10	3,370	15.20	3.20	1.73+1.73+3.74+1.35+2.93+2.93	14.40	3,800	16.70	3.79	
	1.2+1.2+2.5+1.2+2.5+3.5	1.20+1.20+2.50+1.05+2.19+3.06	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.23+2.67+3.29	14.40	3,800	16.70	3.79	



Multi Split

Multi Combinations

RAM 130NP6A											
POSSIBLE COMBINATIONS		COOLING									
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP
				INPUT POWER (W)	CURRENT (A) 230 V				INPUT POWER (W)	CURRENT (A) 230 V	
SIX UNITS	1.2+1.2+2.5+1.2+3.5+3.5	1.20+1.20+2.50+0.92+2.69+2.69	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.14+3.03+3.03	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+1.8+1.8+1.8	1.20+1.20+2.50+1.80+1.80+1.80	10.30	3,230	14.20	3.19	1.73+1.73+3.74+2.33+2.33+2.33	14.20	3,750	16.50	3.79
	1.2+1.2+2.5+1.8+1.8+2.5	1.20+1.20+2.50+1.80+1.80+2.50	11.00	3,470	15.20	3.17	1.73+1.73+3.74+2.00+2.00+3.20	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+1.8+1.8+3.5	1.20+1.20+2.50+1.60+1.60+3.10	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.85+1.85+3.50	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+1.8+1.8+5.0	1.20+1.20+2.50+1.30+1.30+3.70	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.60+1.60+4.00	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+1.8+2.5+2.5	1.20+1.20+2.50+1.70+2.30+2.30	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.80+2.70+2.70	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+1.8+2.5+3.5	1.20+1.20+2.50+1.50+2.00+2.80	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.60+2.50+3.10	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+1.8+3.5+3.5	1.20+1.20+2.50+1.30+2.50+2.50	11.20	3,545	15.60	3.16	1.73+1.73+3.74+1.40+2.90+2.90	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+2.5+2.5+2.5	1.20+1.20+2.50+2.10+2.10+2.10	11.20	3,545	15.60	3.16	1.73+1.73+3.74+2.40+2.40+2.40	14.40	3,800	16.70	3.79
	1.2+1.2+2.5+2.5+2.5+3.5	1.20+1.20+2.50+1.85+1.85+2.60	11.20	3,545	15.60	3.16	1.73+1.73+3.74+2.23+2.23+2.74	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+1.2+1.2	1.20+1.20+3.50+1.20+1.20+1.20	9.50	2,605	11.40	3.65	1.54+1.54+4.11+1.80+1.80+1.80	12.60	3,380	14.80	3.73
	1.2+1.2+3.5+1.2+1.2+1.8	1.20+1.20+3.50+1.20+1.20+1.80	10.10	2,775	12.20	3.64	1.54+1.54+4.11+1.80+1.80+2.50	13.30	3,480	15.30	3.82
	1.2+1.2+3.5+1.2+1.2+2.5	1.20+1.20+3.50+1.20+1.20+2.50	10.80	2,975	13.10	3.63	1.54+1.54+4.11+1.73+1.73+3.74	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+1.2+3.5	1.20+1.20+3.50+1.20+1.20+3.50	11.80	3,050	13.40	3.87	1.54+1.54+4.11+1.54+1.54+4.11	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+1.2+5.0	1.20+1.20+3.50+1.02+1.02+4.26	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.28+1.28+4.63	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+1.8+1.8	1.20+1.20+3.50+1.20+1.80+1.80	10.70	2,945	12.90	3.63	1.54+1.54+4.11+1.80+2.50+2.50	14.00	3,650	16.00	3.84
	1.2+1.2+3.5+1.2+1.8+2.5	1.20+1.20+3.50+1.20+1.80+2.50	11.40	3,305	14.50	3.45	1.54+1.54+4.11+1.58+2.20+3.42	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+1.8+3.5	1.20+1.20+3.50+1.16+1.74+3.39	12.20	3,545	15.60	3.44	1.54+1.54+4.11+1.42+1.98+3.80	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+1.8+5.0	1.20+1.20+3.50+0.95+1.42+3.94	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.20+1.67+4.33	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+2.5+2.5	1.20+1.20+3.50+1.20+2.50+2.50	12.10	3,545	15.60	3.41	1.54+1.54+4.11+1.35+2.93+2.93	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+2.5+3.5	1.20+1.20+3.50+1.05+2.19+3.06	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.23+2.67+3.29	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.2+3.5+3.5	1.20+1.20+3.50+0.92+2.69+2.69	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.14+3.03+3.03	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.8+1.8+1.8	1.20+1.20+3.50+1.80+1.80+1.80	11.30	3,305	14.50	3.41	1.54+1.54+4.11+2.33+2.33+2.33	14.20	3,750	16.50	3.79
	1.2+1.2+3.5+1.8+1.8+2.5	1.20+1.20+3.50+1.80+1.80+2.50	12.00	3,545	15.60	3.39	1.54+1.54+4.11+2.00+2.00+3.20	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.8+1.8+3.5	1.20+1.20+3.50+1.60+1.60+3.10	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.85+1.85+3.50	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.8+1.8+5.0	1.20+1.20+3.50+1.30+1.30+3.70	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.60+1.60+4.00	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.8+2.5+2.5	1.20+1.20+3.50+1.70+2.30+2.30	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.80+2.70+2.70	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.8+2.5+3.5	1.20+1.20+3.50+1.50+2.00+2.80	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.60+2.50+3.10	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+1.8+3.5+3.5	1.20+1.20+3.50+1.30+2.50+2.50	12.20	3,620	15.90	3.37	1.54+1.54+4.11+1.40+1.90+1.90	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+2.5+2.5+2.5	1.20+1.20+3.50+2.10+2.10+2.10	12.20	3,620	15.90	3.37	1.54+1.54+4.11+2.40+2.40+2.40	14.40	3,800	16.70	3.79
	1.2+1.2+3.5+2.5+2.5+3.5	1.20+1.20+3.50+1.85+1.85+2.60	12.20	3,620	15.90	3.37	1.54+1.54+4.11+2.23+2.23+2.74	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+1.2+1.2	1.02+1.02+4.26+1.20+1.20+1.20	9.90	3,175	13.90	3.12	1.28+1.28+4.63+1.80+1.80+1.80	12.60	3,380	14.80	3.73
	1.2+1.2+5.0+1.2+1.2+1.8	1.02+1.02+4.26+1.20+1.20+1.80	10.50	3,345	14.70	3.14	1.28+1.28+4.63+1.80+1.80+2.50	13.30	3,480	15.30	3.82
	1.2+1.2+5.0+1.2+1.2+2.5	1.02+1.02+4.26+1.20+1.20+2.50	11.20	3,545	15.60	3.16	1.28+1.28+4.63+1.73+1.73+3.74	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+1.2+3.5	1.02+1.02+4.26+1.20+1.20+3.50	12.20	3,620	15.90	3.37	1.28+1.28+4.63+1.54+1.54+4.11	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+1.2+5.0	1.02+1.02+4.26+1.02+1.02+4.26	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.28+1.28+4.63	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+1.8+1.8	1.02+1.02+4.26+1.20+1.80+1.80	11.10	3,515	15.40	3.16	1.28+1.28+4.63+1.80+2.50+2.50	14.00	3,650	16.00	3.84
	1.2+1.2+5.0+1.2+1.8+2.5	1.02+1.02+4.26+1.20+1.80+2.50	11.80	3,875	17.00	3.05	1.28+1.28+4.63+1.58+2.20+3.42	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+1.8+3.5	1.02+1.02+4.26+1.16+1.74+3.39	12.60	4,115	18.10	3.06	1.28+1.28+4.63+1.42+1.98+3.80	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+1.8+5.0	1.02+1.02+4.26+0.95+1.42+3.94	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.20+1.67+4.33	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+2.5+2.5	1.02+1.02+4.26+1.20+2.50+2.50	12.50	4,115	18.10	3.04	1.28+1.28+4.63+1.35+2.93+2.93	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+2.5+3.5	1.02+1.02+4.26+1.05+2.19+3.06	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.23+2.67+3.29	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.2+3.5+3.5	1.02+1.02+4.26+0.92+2.69+2.69	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.14+3.03+3.03	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.8+1.8+1.8	1.02+1.02+4.26+1.80+1.80+1.80	11.70	3,875	17.00	3.02	1.28+1.28+4.63+2.33+2.33+2.33	14.20	3,750	16.50	3.79
	1.2+1.2+5.0+1.8+1.8+2.5	1.02+1.02+4.26+1.80+1.80+2.50	12.40	4,115	18.10	3.01	1.28+1.28+4.63+2.00+2.00+3.20	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.8+1.8+3.5	1.02+1.02+4.26+1.60+1.60+3.10	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.85+1.85+3.50	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.8+1.8+5.0	1.02+1.02+4.26+1.30+1.30+3.70	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.60+1.60+4.00	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.8+2.5+2.5	1.02+1.02+4.26+1.70+2.30+2.30	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.80+2.70+2.70	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.8+2.5+3.5	1.02+1.02+4.26+1.50+2.00+2.80	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.60+2.50+3.10	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+1.8+3.5+3.5	1.02+1.02+4.26+1.30+2.50+2.50	12.60	4,190	18.40	3.01	1.28+1.28+4.63+1.40+2.90+2.90	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+2.5+2.5+2.5	1.02+1.02+4.26+2.10+2.10+2.10	12.60	4,190	18.40	3.01	1.28+1.28+4.63+2.40+2.40+2.40	14.40	3,800	16.70	3.79
	1.2+1.2+5.0+2.5+2.5+3.5	1.02+1.02+4.26+1.85+1.85+2.60	12.60	4,190	18.40	3.01	1.28+1.28+4.63+2.23+2.23+2.74	14.40	3,800	16.70	3.79



RAM 130NP6A												
POSSIBLE COMBINATIONS		COOLING										
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP
				INPUT POWER (W)	CURRENT (A) 230 V					INPUT POWER (W)	CURRENT (A) 230 V	
SIX UNITS	1.2+1.8+1.8+1.2+1.2+1.2	1.20+1.80+1.80+1.20+1.20+1.20	8.40	2,500	11.00	3.36		1.80+2.50+2.50+1.80+1.80+1.80	12.20	3,230	14.20	3.78
	1.2+1.8+1.8+1.2+1.2+1.8	1.20+1.80+1.80+1.20+1.20+1.80	9.00	2,670	11.70	3.37		1.80+2.50+2.50+1.80+1.80+2.50	12.90	3,330	14.60	3.87
	1.2+1.8+1.8+1.2+1.2+2.5	1.20+1.80+1.80+1.20+1.20+2.50	9.70	2,870	12.60	3.38		1.80+2.50+2.50+1.73+1.73+3.74	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+1.2+3.5	1.20+1.80+1.80+1.20+1.20+3.50	10.70	2,945	12.90	3.63		1.80+2.50+2.50+1.54+1.54+4.11	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+1.2+5.0	1.20+1.80+1.80+1.02+1.02+4.26	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.28+1.28+4.63	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+1.8+1.8	1.20+1.80+1.80+1.20+1.80+1.80	9.60	3,840	12.50	3.38		1.80+2.50+2.50+1.80+2.50+2.50	13.60	3,500	15.40	3.89
	1.2+1.8+1.8+1.2+1.8+2.5	1.20+1.80+1.80+1.20+1.80+2.50	10.30	3,200	14.10	3.22		1.80+2.50+2.50+1.58+2.20+3.42	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+1.8+3.5	1.20+1.80+1.80+1.16+1.74+3.39	11.10	3,440	15.10	3.23		1.80+2.50+2.50+1.42+1.98+3.80	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+1.8+5.0	1.20+1.80+1.80+0.95+1.42+3.94	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.20+1.67+4.33	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+2.5+2.5	1.20+1.80+1.80+1.20+2.50+2.50	11.10	3,440	15.10	3.20		1.80+2.50+2.50+1.35+2.93+2.93	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+2.5+3.5	1.20+1.80+1.80+1.05+2.19+3.06	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.23+2.67+3.29	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.2+3.5+3.5	1.20+1.80+1.80+0.92+2.69+2.69	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.14+3.03+3.03	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.8+1.8+1.8	1.20+1.80+1.80+1.80+1.80+1.80	10.20	3,200	14.10	3.19		1.80+2.50+2.50+2.33+2.33+2.33	13.80	3,600	15.80	3.83
	1.2+1.8+1.8+1.8+1.8+2.5	1.20+1.80+1.80+1.80+1.80+2.50	10.90	3,440	15.10	3.17		1.80+2.50+2.50+2.00+2.00+3.20	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.8+1.8+3.5	1.20+1.80+1.80+1.60+1.60+3.10	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.85+1.85+3.50	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.8+1.8+5.0	1.20+1.80+1.80+1.30+1.30+3.70	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.60+1.60+4.00	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.8+2.5+2.5	1.20+1.80+1.80+1.70+2.30+2.30	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.80+2.70+2.70	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.8+2.5+3.5	1.20+1.80+1.80+1.50+2.00+2.80	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.60+2.50+3.10	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+1.8+3.5+3.5	1.20+1.80+1.80+1.30+2.50+2.50	11.10	3,515	15.40	3.16		1.80+2.50+2.50+1.40+2.90+2.90	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+2.5+2.5+2.5	1.20+1.80+1.80+2.10+2.10+2.10	11.10	3,515	15.40	3.16		1.80+2.50+2.50+2.40+2.40+2.40	14.00	3,650	16.00	3.84
	1.2+1.8+1.8+2.5+2.5+3.5	1.20+1.80+1.80+1.85+1.85+2.60	11.10	3,515	15.40	3.16		1.80+2.50+2.50+2.23+2.23+2.74	14.00	3,650	16.00	3.84
	1.2+1.8+2.5+1.2+1.2+1.2	1.20+1.80+2.50+1.20+1.20+1.20	9.10	2,860	12.60	3.18		1.58+2.20+3.42+1.80+1.80+1.80	12.60	3,380	14.80	3.73
	1.2+1.8+2.5+1.2+1.2+1.8	1.20+1.80+2.50+1.20+1.20+1.80	9.70	3,030	13.30	3.20		1.58+2.20+3.42+1.80+1.80+2.50	13.30	3,480	15.30	3.82
	1.2+1.8+2.5+1.2+1.2+2.5	1.20+1.80+2.50+1.20+1.20+2.50	10.40	3,230	14.20	3.22		1.58+2.20+3.42+1.73+1.73+3.74	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+1.2+3.5	1.20+1.80+2.50+1.20+1.20+3.50	11.40	3,305	14.50	3.45		1.58+2.20+3.42+1.54+1.54+4.11	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+1.2+5.0	1.20+1.80+2.50+1.02+1.02+4.26	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.28+1.28+4.63	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+1.8+1.8	1.20+1.80+2.50+1.20+1.80+1.80	10.30	3,200	14.10	3.22		1.58+2.20+3.42+1.80+2.50+2.50	14.00	3,650	16.00	3.84
	1.2+1.8+2.5+1.2+1.8+2.5	1.20+1.80+2.50+1.20+1.80+2.50	11.00	3,560	15.60	3.09		1.58+2.20+3.42+1.58+2.20+3.42	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+1.8+3.5	1.20+1.80+2.50+1.16+1.74+3.39	11.80	3,800	16.70	3.11		1.58+2.20+3.42+1.42+1.98+3.80	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+1.8+5.0	1.20+1.80+2.50+0.95+1.42+3.94	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.20+1.67+4.33	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+2.5+2.5	1.20+1.80+2.50+1.20+2.50+2.50	11.70	3,800	16.70	3.08		1.58+2.20+3.42+1.35+2.93+2.93	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+2.5+3.5	1.20+1.80+2.50+1.05+2.19+3.06	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.23+2.67+3.29	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.2+3.5+3.5	1.20+1.80+2.50+0.92+2.69+2.69	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.14+3.03+3.03	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.8+1.8+1.8	1.20+1.80+2.50+1.80+1.80+1.80	10.90	3,560	15.60	3.06		1.58+2.20+3.42+2.33+2.33+2.33	14.20	3,750	16.50	3.79
	1.2+1.8+2.5+1.8+1.8+2.5	1.20+1.80+2.50+1.80+1.80+2.50	11.60	3,800	16.70	3.05		1.58+2.20+3.42+2.00+2.00+3.20	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.8+1.8+3.5	1.20+1.80+2.50+1.60+1.60+3.10	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.85+1.85+3.50	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.8+1.8+5.0	1.20+1.80+2.50+1.30+1.30+3.70	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.60+1.60+4.00	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.8+2.5+2.5	1.20+1.80+2.50+1.70+2.30+2.30	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.80+2.70+2.70	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.8+2.5+3.5	1.20+1.80+2.50+1.50+2.00+2.80	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.60+2.50+3.10	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+1.8+3.5+3.5	1.20+1.80+2.50+1.30+2.50+2.50	11.80	3,875	17.00	3.05		1.58+2.20+3.42+1.40+2.90+2.90	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+2.5+2.5+2.5	1.20+1.80+2.50+2.10+2.10+2.10	11.80	3,875	17.00	3.05		1.58+2.20+3.42+2.40+2.40+2.40	14.40	3,800	16.70	3.79
	1.2+1.8+2.5+2.5+2.5+3.5	1.20+1.80+2.50+1.85+1.85+2.60	11.80	3,875	17.00	3.05		1.58+2.20+3.42+2.23+2.23+2.74	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+1.2+1.2	1.16+1.74+3.39+1.20+1.20+1.20	9.90	3,100	13.60	3.19		1.42+1.98+3.80+1.80+1.80+1.80	12.60	3,380	14.80	3.73
	1.2+1.8+3.5+1.2+1.2+1.8	1.16+1.74+3.39+1.20+1.20+1.80	10.50	3,270	14.40	3.21		1.42+1.98+3.80+1.80+1.80+2.50	13.30	3,480	15.30	3.82
	1.2+1.8+3.5+1.2+1.2+2.5	1.16+1.74+3.39+1.20+1.20+2.50	11.20	3,470	15.20	3.23		1.42+1.98+3.80+1.73+1.73+3.74	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+1.2+3.5	1.16+1.74+3.39+1.20+1.20+3.50	12.20	3,545	15.60	3.44		1.42+1.98+3.80+1.54+1.54+4.11	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+1.2+5.0	1.16+1.74+3.39+1.02+1.02+4.26	12.60	4,115	18.10	3.06		1.42+1.98+3.80+1.28+1.28+4.63	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+1.8+1.8	1.16+1.74+3.39+1.20+1.80+1.80	11.10	3,440	15.10	3.23		1.42+1.98+3.80+1.80+2.50+2.50	14.00	3,650	16.00	3.84
	1.2+1.8+3.5+1.2+1.8+2.5	1.16+1.74+3.39+1.20+1.80+2.50	11.80	3,800	16.70	3.11		1.42+1.98+3.80+1.58+2.20+3.42	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+1.8+3.5	1.16+1.74+3.39+1.16+1.74+3.39	12.60	4,040	17.70	3.12		1.42+1.98+3.80+1.42+1.98+3.80	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+1.8+5.0	1.16+1.74+3.39+0.95+1.42+3.94	12.60	4,115	18.10	3.06		1.42+1.98+3.80+1.20+1.67+4.33	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+2.5+2.5	1.16+1.74+3.39+1.20+2.50+2.50	12.60	4,040	17.70	3.09		1.42+1.98+3.80+1.35+2.93+2.93	14.40	3,800	16.70	3.79
	1.2+1.8+3.5+1.2+2.5+3.5	1.16+1.74+3.39+1.05+2.19+3.06	12.60	4,115	18.10	3.06		1.42+1.98+3.80+1.23+2.67+3.29	14.40	3,800	16.70	3.79



Multi Split

Multi Combinations

RAM 130NP6A												
POSSIBLE COMBINATIONS		COOLING										
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP	
				INPUT POWER (W)	CURRENT (A) 230 V				INPUT POWER (W)	CURRENT (A) 230 V		
SIX UNITS	1.2+1.8+3.5+1.2+3.5+3.5	1.16+1.74+3.39+0.92+2.69+2.69	12.60	4,115	18.10	3.06	1.42+1.98+3.80+1.14+3.03+3.03	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+1.8+1.8+1.8	1.16+1.74+3.39+1.80+1.80+1.80	11.70	3,800	16.70	3.08	1.42+1.98+3.80+2.33+2.33+2.33	14.20	3,750	16.50	3.79	
	1.2+1.8+3.5+1.8+1.8+2.5	1.16+1.74+3.39+1.80+1.80+2.50	12.40	4,040	17.70	3.07	1.42+1.98+3.80+2.00+2.00+3.20	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+1.8+1.8+3.5	1.16+1.74+3.39+1.60+1.60+3.10	12.60	4,115	18.10	3.06	1.42+1.98+3.80+1.85+1.85+3.50	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+1.8+1.8+5.0	1.16+1.74+3.39+1.30+1.30+3.70	12.60	4,115	18.10	3.06	1.42+1.98+3.80+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+1.8+2.5+2.5	1.16+1.74+3.39+1.70+2.30+2.30	12.60	4,115	18.10	3.06	1.42+1.98+3.80+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+1.8+2.5+3.5	1.16+1.74+3.39+1.50+2.00+2.80	12.60	4,115	18.10	3.06	1.42+1.98+3.80+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+1.8+3.5+3.5	1.16+1.74+3.39+1.30+2.50+2.50	12.60	4,115	18.10	3.06	1.42+1.98+3.80+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+2.5+2.5+2.5	1.16+1.74+3.39+2.10+2.10+2.10	12.60	4,115	18.10	3.06	1.42+1.98+3.80+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.2+1.8+3.5+2.5+2.5+3.5	1.16+1.74+3.39+1.85+1.85+2.60	12.60	4,115	18.10	3.06	1.42+1.98+3.80+2.23+2.23+2.74	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+1.2+1.2	0.95+1.42+3.94+1.20+1.20+1.20	9.90	3,175	13.90	3.12	1.20+1.67+4.33+1.80+1.80+1.80	12.60	3,380	14.80	3.73	
	1.2+1.8+5.0+1.2+1.2+1.8	0.95+1.42+3.94+1.20+1.20+1.80	10.50	3,345	14.70	3.14	1.20+1.67+4.33+1.80+1.80+2.50	13.30	3,480	15.30	3.82	
	1.2+1.8+5.0+1.2+1.2+2.5	0.95+1.42+3.94+1.20+1.20+2.50	11.20	3,545	15.60	3.16	1.20+1.67+4.33+1.73+1.73+3.74	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+1.2+3.5	0.95+1.42+3.94+1.20+1.20+3.50	12.20	3,620	15.90	3.37	1.20+1.67+4.33+1.54+1.54+4.11	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+1.2+5.0	0.95+1.42+3.94+1.02+1.02+4.26	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.28+1.28+4.63	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+1.8+1.8	0.95+1.42+3.94+1.20+1.80+1.80	11.10	3,515	15.40	3.16	1.20+1.67+4.33+1.80+2.50+2.50	14.00	3,650	16.00	3.84	
	1.2+1.8+5.0+1.2+1.8+2.5	0.95+1.42+3.94+1.20+1.80+2.50	11.80	3,875	17.00	3.05	1.20+1.67+4.33+1.58+2.20+3.42	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+1.8+3.5	0.95+1.42+3.94+1.16+1.74+3.39	12.60	4,115	18.10	3.06	1.20+1.67+4.33+1.42+1.98+3.80	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+1.8+5.0	0.95+1.42+3.94+0.95+1.42+3.94	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.20+1.67+4.33	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+2.5+2.5	0.95+1.42+3.94+1.20+2.50+2.50	12.50	4,115	18.10	3.04	1.20+1.67+4.33+1.35+2.93+2.93	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+2.5+3.5	0.95+1.42+3.94+1.05+2.19+3.06	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.23+2.67+3.29	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.2+3.5+3.5	0.95+1.42+3.94+0.92+2.69+2.69	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.14+3.03+3.03	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.8+1.8+1.8	0.95+1.42+3.94+1.80+1.80+1.80	11.70	3,875	17.00	3.02	1.20+1.67+4.33+2.33+2.33+2.33	14.20	3,750	16.50	3.79	
	1.2+1.8+5.0+1.8+1.8+2.5	0.95+1.42+3.94+1.80+1.80+2.50	12.40	4,115	18.10	3.01	1.20+1.67+4.33+2.00+2.00+3.20	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.8+1.8+3.5	0.95+1.42+3.94+1.60+1.60+3.10	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.85+1.85+3.50	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.8+1.8+5.0	0.95+1.42+3.94+1.30+1.30+3.70	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.8+2.5+2.5	0.95+1.42+3.94+1.70+2.30+2.30	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.8+2.5+3.5	0.95+1.42+3.94+1.50+2.00+2.80	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+1.8+3.5+3.5	0.95+1.42+3.94+1.30+2.50+2.50	12.60	4,190	18.40	3.01	1.20+1.67+4.33+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+2.5+2.5+2.5	0.95+1.42+3.94+2.10+2.10+2.10	12.60	4,190	18.40	3.01	1.20+1.67+4.33+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.2+1.8+5.0+2.5+2.5+3.5	0.95+1.42+3.94+1.85+1.85+2.60	12.60	4,190	18.40	3.01	1.20+1.67+4.33+2.23+2.23+2.74	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+1.2+1.2	1.20+2.50+2.50+1.20+1.20+1.20	9.80	3,100	13.60	3.16	1.35+2.93+2.93+1.80+1.80+1.80	12.60	3,380	14.80	3.73	
	1.2+2.5+2.5+1.2+1.2+1.8	1.20+2.50+2.50+1.20+1.20+1.80	10.40	3,270	14.40	3.18	1.35+2.93+2.93+1.80+1.80+2.50	13.30	3,480	15.30	3.82	
	1.2+2.5+2.5+1.2+1.2+2.5	1.20+2.50+2.50+1.20+1.20+2.50	11.10	3,470	15.20	3.20	1.35+2.93+2.93+1.73+1.73+3.74	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+1.2+3.5	1.20+2.50+2.50+1.20+1.20+3.50	12.10	3,545	15.60	3.41	1.35+2.93+2.93+1.54+1.54+4.11	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+1.2+5.0	1.20+2.50+2.50+1.02+1.02+4.26	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.28+1.28+4.63	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+1.8+1.8	1.20+2.50+2.50+1.20+1.80+1.80	11.00	3,440	15.10	3.20	1.35+2.93+2.93+1.80+2.50+2.50	14.00	3,650	16.00	3.84	
	1.2+2.5+2.5+1.2+1.8+2.5	1.20+2.50+2.50+1.20+1.80+2.50	11.70	3,800	16.70	3.08	1.35+2.93+2.93+1.58+2.20+3.42	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+1.8+3.5	1.20+2.50+2.50+1.16+1.74+3.39	12.50	4,040	17.70	3.09	1.35+2.93+2.93+1.42+1.98+3.80	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+1.8+5.0	1.20+2.50+2.50+0.95+1.42+3.94	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.20+1.67+4.33	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+2.5+2.5	1.20+2.50+2.50+1.20+2.50+2.50	12.40	4,040	17.70	3.07	1.35+2.93+2.93+1.35+2.93+2.93	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+2.5+3.5	1.20+2.50+2.50+1.05+2.19+3.06	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.23+2.67+3.29	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.2+3.5+3.5	1.20+2.50+2.50+0.92+2.69+2.69	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.14+3.03+3.03	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.8+1.8+1.8	1.20+2.50+2.50+1.80+1.80+1.80	11.60	3,800	16.70	3.05	1.35+2.93+2.93+2.33+2.33+2.33	14.20	3,750	16.50	3.79	
	1.2+2.5+2.5+1.8+1.8+2.5	1.20+2.50+2.50+1.80+1.80+2.50	12.30	4,040	17.70	3.04	1.35+2.93+2.93+2.00+2.00+3.20	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.8+1.8+3.5	1.20+2.50+2.50+1.60+1.60+3.10	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.85+1.85+3.50	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.8+1.8+5.0	1.20+2.50+2.50+1.30+1.30+3.70	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.8+2.5+2.5	1.20+2.50+2.50+1.70+2.30+2.30	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.8+2.5+3.5	1.20+2.50+2.50+1.50+2.00+2.80	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+1.8+3.5+3.5	1.20+2.50+2.50+1.30+2.50+2.50	12.50	4,115	18.10	3.04	1.35+2.93+2.93+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+2.5+2.5+2.5	1.20+2.50+2.50+2.10+2.10+2.10	12.50	4,115	18.10	3.04	1.35+2.93+2.93+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.2+2.5+2.5+2.5+2.5+3.5	1.20+2.50+2.50+1.85+1.85+2.60	12.50	4,115	18.10	3.04	1.35+2.93+2.93+2.23+2.23+2.74	14.40	3,800	16.70	3.79	



RAM 130NP6A													
POSSIBLE COMBINATIONS		COOLING											
		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP	
				INPUT POWER (W)	CURRENT (A) 230 V					INPUT POWER (W)	CURRENT (A) 230 V		
SIX UNITS	1.2+2.5+3.5+1.2+1.2+1.2	1.05+2.19+3.06+1.20+1.20+1.20	9.90	3,175	13.90	3.12		1.23+2.67+3.29+1.80+1.80+1.80	12.60	3,380	14.80	3.73	
	1.2+2.5+3.5+1.2+1.2+1.8	1.05+2.19+3.06+1.20+1.20+1.80	10.50	3,345	14.70	3.14		1.23+2.67+3.29+1.80+1.80+2.50	13.30	3,480	15.30	3.82	
	1.2+2.5+3.5+1.2+1.2+2.5	1.05+2.19+3.06+1.20+1.20+2.50	11.20	3,545	15.60	3.16		1.23+2.67+3.29+1.73+1.73+3.74	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.2+3.5	1.05+2.19+3.06+1.20+1.20+3.50	12.20	3,620	15.90	3.37		1.23+2.67+3.29+1.54+1.54+4.11	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.2+5.0	1.05+2.19+3.06+1.02+1.02+4.26	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.28+1.28+4.63	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.8+1.8	1.05+2.19+3.06+1.20+1.80+1.80	11.10	3,515	15.40	3.16		1.23+2.67+3.29+1.80+2.50+2.50	14.00	3,650	16.00	3.84	
	1.2+2.5+3.5+1.2+1.8+2.5	1.05+2.19+3.06+1.20+1.80+2.50	11.80	3,875	17.00	3.05		1.23+2.67+3.29+1.58+2.20+3.42	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.8+3.5	1.05+2.19+3.06+1.16+1.74+3.39	12.60	4,115	18.10	3.06		1.23+2.67+3.29+1.42+1.98+3.80	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.8+5.0	1.05+2.19+3.06+0.95+1.42+3.94	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.20+1.67+4.33	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+2.5+2.5	1.05+2.19+3.06+1.20+2.50+2.50	12.50	4,115	18.10	3.04		1.23+2.67+3.29+1.35+2.93+2.93	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+2.5+3.5	1.05+2.19+3.06+1.05+2.19+3.06	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.23+2.67+3.29	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+3.5+3.5	1.05+2.19+3.06+0.92+2.69+2.69	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.14+3.03+3.03	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+1.8+1.8	1.05+2.19+3.06+1.80+1.80+1.80	11.70	3,875	17.00	3.02		1.23+2.67+3.29+2.33+2.33+2.33	14.20	3,750	16.50	3.79	
	1.2+2.5+3.5+1.8+1.8+2.5	1.05+2.19+3.06+1.80+1.80+2.50	12.40	4,115	18.10	3.01		1.23+2.67+3.29+2.00+2.00+3.20	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+1.8+3.5	1.05+2.19+3.06+1.60+1.60+3.10	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.85+1.85+3.50	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+1.8+5.0	1.05+2.19+3.06+1.30+1.30+3.70	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+2.5+2.5	1.05+2.19+3.06+1.70+2.30+2.30	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+2.5+3.5	1.05+2.19+3.06+1.50+2.00+2.80	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+3.5+3.5	1.05+2.19+3.06+1.30+2.50+2.50	12.60	4,190	18.40	3.01		1.23+2.67+3.29+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+2.5+2.5+2.5	1.05+2.19+3.06+2.10+2.10+2.10	12.60	4,190	18.40	3.01		1.23+2.67+3.29+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+2.5+2.5+3.5	1.05+2.19+3.06+1.85+1.85+2.60	12.60	4,190	18.40	3.01		1.23+2.67+3.29+2.23+2.23+2.74	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.2+1.2	0.92+2.69+2.69+1.20+1.20+1.20	9.90	3,175	13.90	3.12		1.14+3.03+3.03+1.80+1.80+1.80	12.60	3,380	14.80	3.73	
	1.2+2.5+3.5+1.2+1.2+1.8	0.92+2.69+2.69+1.20+1.20+1.80	10.50	3,345	14.70	3.14		1.14+3.03+3.03+1.80+1.80+2.50	13.30	3,480	15.30	3.82	
	1.2+2.5+3.5+1.2+1.2+2.5	0.92+2.69+2.69+1.20+1.20+2.50	11.20	3,545	15.60	3.16		1.14+3.03+3.03+1.73+1.73+3.74	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.2+3.5	0.92+2.69+2.69+1.20+1.20+3.50	12.20	3,620	15.90	3.37		1.14+3.03+3.03+1.54+1.54+4.11	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.2+5.0	0.92+2.69+2.69+1.02+1.02+4.26	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.28+1.28+4.63	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.8+1.8	0.92+2.69+2.69+1.20+1.80+1.80	11.10	3,515	15.40	3.16		1.14+3.03+3.03+1.80+2.50+2.50	14.00	3,650	16.00	3.84	
	1.2+2.5+3.5+1.2+1.8+2.5	0.92+2.69+2.69+1.20+1.80+2.50	11.80	3,875	17.00	3.05		1.14+3.03+3.03+1.58+2.20+3.42	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.8+3.5	0.92+2.69+2.69+1.16+1.74+3.39	12.60	4,115	18.10	3.06		1.14+3.03+3.03+1.42+1.98+3.80	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+1.8+5.0	0.92+2.69+2.69+0.95+1.42+3.94	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.20+1.67+4.33	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+2.5+2.5	0.92+2.69+2.69+1.20+2.50+2.50	12.50	4,115	18.10	3.04		1.14+3.03+3.03+1.35+2.93+2.93	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+2.5+3.5	0.92+2.69+2.69+1.05+2.19+3.06	112.60	4,190	18.40	3.01		1.14+3.03+3.03+1.23+2.67+3.29	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.2+3.5+3.5	0.92+2.69+2.69+0.92+2.69+2.69	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.14+3.03+3.03	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+1.8+1.8	0.92+2.69+2.69+1.80+1.80+1.80	11.70	3,875	17.00	3.02		1.14+3.03+3.03+2.33+2.33+2.33	14.20	3,750	16.50	3.79	
	1.2+2.5+3.5+1.8+1.8+2.5	0.92+2.69+2.69+1.80+1.80+2.50	12.40	4,115	18.10	3.01		1.14+3.03+3.03+2.00+2.00+3.20	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+1.8+3.5	0.92+2.69+2.69+1.60+1.60+3.10	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.85+1.85+3.50	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+1.8+5.0	0.92+2.69+2.69+1.30+1.30+3.70	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+2.5+2.5	0.92+2.69+2.69+1.70+2.30+2.30	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+2.5+3.5	0.92+2.69+2.69+1.50+2.00+2.80	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+1.8+3.5+3.5	0.92+2.69+2.69+1.30+2.50+2.50	12.60	4,190	18.40	3.01		1.14+3.03+3.03+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+2.5+2.5+2.5	0.92+2.69+2.69+2.10+2.10+2.10	12.60	4,190	18.40	3.01		1.14+3.03+3.03+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.2+2.5+3.5+2.5+2.5+3.5	0.92+2.69+2.69+1.85+1.85+2.60	12.60	4,190	18.40	3.01		1.14+3.03+3.03+2.23+2.23+2.74	14.40	3,800	16.70	3.79	



Multi Combinations

RAM 130NP6A												
POSSIBLE COMBINATIONS		INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		EER	INPUT NOMINAL (kW) (min-max)	TOT.	OUTDOOR UNIT		COP	
				INPUT POWER (W)	CURRENT 230V (A)				INPUT POWER (W)	CURRENT 230V (A)		
SIX UNITS	1.8+1.8+1.8+1.8+1.8+1.8	1.80+1.80+1.80+1.80+1.80+1.80	10.80	3,560	15.60	3.03	2.33+2.33+2.33+2.33+2.33+2.33	14.00	3,700	16.20	3.78	
	1.8+1.8+1.8+1.8+1.8+2.5	1.80+1.80+1.80+1.80+1.80+2.50	11.50	3,800	16.70	3.03	2.33+2.33+2.33+2.00+2.00+3.20	14.20	3,750	16.50	3.79	
	1.8+1.8+1.8+1.8+1.8+3.5	1.80+1.80+1.80+1.60+1.60+3.10	11.70	3,875	17.00	3.02	2.33+2.33+2.33+1.85+1.85+3.50	14.20	3,750	16.50	3.79	
	1.8+1.8+1.8+1.8+1.8+5.0	1.80+1.80+1.80+1.30+1.30+3.70	11.70	3,875	17.00	3.02	2.33+2.33+2.33+1.60+1.60+4.00	14.20	3,750	16.50	3.79	
	1.8+1.8+2.5+1.8+1.8+2.5	1.80+1.80+2.50+1.80+1.80+2.50	12.20	4,040	17.70	3.02	2.00+2.00+3.20+2.00+2.00+3.20	14.40	3,800	16.70	3.79	
	1.8+1.8+2.5+1.8+1.8+3.5	1.80+1.80+2.50+1.60+1.60+3.10	12.40	4,115	18.10	3.01	2.00+2.00+3.20+1.85+1.85+3.50	14.40	3,800	16.70	3.79	
	1.8+1.8+2.5+1.8+1.8+5.0	1.80+1.80+2.50+1.30+1.30+3.70	12.40	4,115	18.10	3.01	2.00+2.00+3.20+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.8+1.8+3.5+1.8+1.8+3.5	1.60+1.60+3.10+1.60+1.60+3.10	12.60	4,190	18.40	3.01	1.85+1.85+3.50+1.85+1.85+3.50	14.40	3,800	16.70	3.79	
	1.8+1.8+3.5+1.8+1.8+5.0	1.60+1.60+3.10+1.30+1.30+3.70	12.60	4,190	18.40	3.01	1.85+1.85+3.50+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.8+1.8+5.0+1.8+1.8+5.0	1.30+1.30+3.70+1.30+1.30+3.70	12.60	4,190	18.40	3.01	1.60+1.60+4.00+1.60+1.60+4.00	14.40	3,800	16.70	3.79	
	1.8+1.8+2.5+1.8+2.5+2.5	1.80+1.80+2.50+1.70+2.30+2.30	12.40	4,115	18.10	3.01	2.00+2.00+3.20+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.8+1.8+2.5+1.8+2.5+3.5	1.80+1.80+2.50+1.50+2.00+2.80	12.40	4,115	18.10	3.01	2.00+2.00+3.20+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.8+1.8+5.0+1.8+2.5+2.5	1.30+1.30+3.70+1.70+2.30+2.30	12.60	4,190	18.40	3.01	1.60+1.60+4.00+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.8+1.8+3.5+1.8+2.5+3.5	1.60+1.60+3.10+1.50+2.00+2.80	12.60	4,190	18.40	3.01	1.85+1.85+3.50+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.8+1.8+5.0+1.8+2.5+3.5	1.30+1.30+3.70+1.50+2.00+2.80	12.60	4,190	18.40	3.01	1.60+1.60+4.00+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.8+1.8+3.5+1.8+3.5+3.5	1.60+1.60+3.10+1.30+2.50+2.50	12.60	4,190	18.40	3.01	1.85+1.85+3.50+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.8+1.8+5.0+1.8+3.5+3.5	1.30+1.30+3.70+1.30+2.50+2.50	12.60	4,190	18.40	3.01	1.60+1.60+4.00+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.8+2.5+2.5+1.8+2.5+2.5	1.70+2.30+2.30+1.70+2.30+2.30	12.60	4,190	18.40	3.01	1.80+2.70+2.70+1.80+2.70+2.70	14.40	3,800	16.70	3.79	
	1.8+2.5+2.5+1.8+2.5+3.5	1.70+2.30+2.30+1.50+2.00+2.80	12.60	4,190	18.40	3.01	1.80+2.70+2.70+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.8+1.8+5.0+2.5+2.5+2.5	1.30+1.30+3.70+2.10+2.10+2.10	12.60	4,190	18.40	3.01	1.60+1.60+4.00+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.8+2.5+3.5+1.8+2.5+3.5	1.50+2.00+2.80+1.50+2.00+2.80	12.60	4,190	18.40	3.01	1.60+2.50+3.10+1.60+2.50+3.10	14.40	3,800	16.70	3.79	
	1.8+1.8+5.0+2.5+2.5+3.5	1.30+1.30+3.70+1.85+1.85+2.60	12.60	4,190	18.40	3.01	1.60+1.60+4.00+2.23+2.23+2.74	14.40	3,800	16.70	3.79	
	1.8+2.5+3.5+1.8+3.5+3.5	1.50+2.00+2.80+1.30+2.50+2.50	12.60	4,190	18.40	3.01	1.60+2.50+3.10+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.8+3.5+3.5+1.8+3.5+3.5	1.30+2.50+2.50+1.30+2.50+2.50	12.60	4,190	18.40	3.01	1.40+2.90+2.90+1.40+2.90+2.90	14.40	3,800	16.70	3.79	
	1.8+2.5+2.5+2.5+2.5+2.5	1.70+2.30+2.30+2.10+2.10+2.10	12.60	4,190	18.40	3.01	1.80+2.70+2.70+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.8+2.5+3.5+2.5+2.5+2.5	1.50+2.00+2.80+2.10+2.10+2.10	12.60	4,190	18.40	3.01	1.60+2.50+3.10+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	1.8+2.5+3.5+2.5+2.5+3.5	1.50+2.00+2.80+1.85+1.85+2.60	12.60	4,190	18.40	3.01	1.60+2.50+3.10+2.23+2.23+2.74	14.40	3,800	16.70	3.79	
	1.8+3.5+3.5+2.5+2.5+3.5	1.30+2.50+2.50+1.85+1.85+2.60	12.60	4,190	18.40	3.01	1.40+2.90+2.90+2.23+2.23+2.74	14.40	3,800	16.70	3.79	
	2.5+2.5+2.5+2.5+2.5+2.5	2.10+2.10+2.10+2.10+2.10+2.10	12.60	4,190	18.40	3.01	2.40+2.40+2.40+2.40+2.40+2.40	14.40	3,800	16.70	3.79	
	2.5+2.5+2.5+2.5+2.5+3.5	2.10+2.10+2.10+1.85+1.85+2.60	12.60	4,190	18.40	3.01	2.40+2.40+2.40+2.23+2.23+2.74	14.40	3,800	16.70	3.79	
	2.5+2.5+3.5+2.5+2.5+3.5	1.85+1.85+2.60+1.85+1.85+2.60	12.60	4,190	18.40	3.01	2.23+2.23+2.74+2.23+2.23+2.74	14.40	3,800	16.70	3.79	

NOTES:

- * The indication "one unit" shows operation data of one indoor unit only when four or more indoor units are connected.
- * The indication "two units" shows operation data of two indoor units when four or more indoor units are connected.
- * The indication "three units" shows operation data of three indoor units when four or more indoor units are connected.
- * The indication "four units" shows operation data of four indoor units when four or more indoor units are connected.
- * The indication "five units" shows operation data of five indoor units when five or more indoor units are connected.
- * At least four indoor units must be connected with at least 5 metres of piping for each one.



Work conditions

- Cooling Capacity with Indoor Unit air Temperature: 27°C BS / 19°C BU; Outdoor Unit air Temperature: 35°C BS; Piping Length: 7.5 metres; Lift: 0 metres.
- Heating capacity with Indoor Unit air Temperature: 20°C BS and Outdoor Unit air Temperature: 7°C BS / 6°C BU; Piping Length: 7.5 metres; Lift: 0 metres.



Residential range accessories

REMOTE CONTROLLERS FOR THE RESIDENTIAL 2013 RANGE (ERP)

Standard-supplied IR controller for Cut Out, Performance
(wall, floor, 4-way cassette mono and multi split)

Optional IR controller
for ductable
(low and medium head rise
mono and multi split)



CODE	RAR-5E1	RAR-5E2	RAR-5E3	RAR-5E4	SPX-RCKA (RAR-5E5)
AVAILABLE FUNCTIONS	7-DAY TIMER	7-DAY TIMER	7-DAY TIMER	7-DAY TIMER	7-DAY TIMER
	SLEEP	SLEEP	SLEEP	SLEEP	SLEEP
	ECO (without sensor)	ECO (without sensor)	ECO (without sensor)	ECO (without sensor)	ECO (without sensor)
	POWERFUL	POWERFUL	POWERFUL	POWERFUL	POWERFUL
	SILENT	SILENT	SILENT	SILENT	SILENT
	LEAVE HOME 0-99DD	LEAVE HOME 0-99DD	LEAVE HOME 0-99DD	LEAVE HOME 0-99DD	LEAVE HOME 0-99DD
	INFO	INFO	INFO	INFO	INFO
	CLEAN	CLEAN	CLEAN	CLEAN	CLEAN
	SWING VERTICAL	SWING VERTICAL	AIR PURIFY	EXTENDED AIRFLOW	
	SWING HORIZONTAL				
INDOOR UNITS TO WHICH IT IS APPLICABLE	RAK-50PPA	RAK-18PPA	RAK-25PXA	RAF-25PXA	RAD-18RPA
	RAK-70PPA	RAK-25PPA	RAK-35PXA	RAF-35PXA	RAD-25RPA
	RAK-18QPA	RAK-35PPA	RAK-50PXA	RAF-50PXA	RAD-35RPA
	RAK-25QPA	RAK-60PPA			RAD-50RPA
	RAK-35QPA	RAF-25RPA			RAD-50PPA
	RAK-50QPA	RAF-35RPA			RAD-60PPA
	RAK-25PXB (ECO with sensor)	RAF-50RPA			RAD-70PPA
	RAK-35PXB (ECO with sensor)	RAI-25RPA			
	RAK-50PXB (ECO with sensor)	RAI-35RPA			
	RAK-35PPB	RAI-50RPA			
	RAK-50PPB	RAK-18QXA			
		RAK-25QXA			
		RAK-35QXA			
		RAK-50QXA			
		RAK-18PPB			
		RAK-25PPB			

Standard supplied IR controller
for Premium
(wall, mono split)

Standard supplied IR controller for Eco Comfort
(wall, mono split)

Optional wired controller for
ductable
(low and medium head rise
mono and multi split)

Optional wired controller for
wall, floor,
4-way cassette
(mono and multi split)



CODE	RAR-5W1	RAR-5F1	SPX-RCDA (RAR-5G1)	SPX-RCDB (RAR-5G2)
AVAILABLE FUNCTIONS	7-DAY TIMER	12H TIMER	12H TIMER	12H TIMER
	SLEEP TIMER ECO	ECO (without sensor)	SLEEP	SLEEP
	ECO SENSOR	POWERFUL		SWING VERTICAL
	POWERFUL	LEAVE HOME		
	SILENT			
	LEAVE HOME 0-99DD			
	INFO			
	CLEAN			
	FILTER CLEAN			
	SWING VERTICAL			
	SWING HORIZONTAL			
	COMFORT AIRFLOW			
INDOOR UNITS TO WHICH IT IS APPLICABLE	RAK-18PSB	RAK-18PEA	RAD-18RPA	RAK-PSB / PXA / PXB / PPA / PPB / PEA / PEB / QXA / QPA
	RAK-25PSB	RAK-25PEA	RAD-25RPA	RAF-PXA / QXA / RPA
	RAK-35PSB	RAK-35PEA	RAD-35RPA	RAI-RPA
		RAK-50PEA	RAD-50RPA	
		RAK-18PEB	RAD-50PPA	
		RAK-25PEB	RAD-60PPA	
		RAK-35PEB	RAD-70PPA	
		RAK-50PEB		



Filter and prefilter table (RAC 2013)


CODE	Image	Description	Standard supplied on models						Optional on models:	
SPX-CFH15		Universal air purifying filter, non washable Nano Titanium filter	RAF-25PXA				RAF-25QXA	RAF-25RPA		
			RAF-35PXA				RAF-35QXA	RAF-35RPA		
			RAF-50PXA				RAF-50QXA	RAF-50RPA		
SPX-CFH22		Wasabi Nano Titanium Filter			RAK-18PPA	RAK-18PPB	RAK-18QXA	RAK-18QPA	RAK-18PSA	RAK-18PEA
			RAK-25PXA	RAK-25PXB	RAK-25PPA	RAK-25PPB	RAK-25QXA	RAK-25QPA	RAK-25PSA	RAK-25PEA
			RAK-35PXA	RAK-35PXB	RAK-35PPA	RAK-35PPB	RAK-35QXA	RAK-35QPA	RAK-35PSA	RAK-35PEA
			RAK-50PXA	RAK-50PXB	RAK-50PPA	RAK-50PPB	RAK-50QXA	RAK-50QPA		RAK-50PEA
SPX-NTW1		Wasabi Nano Titanium Filter	RAK-60PPA						RAI-25RPA	
									RAI-35RPA	
									RAI-50RPA	
SPX-NTW2		Wasabi Nano Titanium Filter	RAK-70PPA							
SPX-WC1		Wasabi Cassette Filter	RAK-18PSB RAK-25PSB RAK-35PSB							

CODE	Image	Description	Applicable on models:			
SPX-SPF3		Stainless steel pre-filter (1030mm)	RAK-60PPA			
SPX-SPF4		Stainless steel pre-filter (1150mm)	RAK-70PPA			
SPX-SPF5		Stainless steel pre-filter	RAK-50PPA	RAK-18QPA		
				RAK-25QPA		
				RAK-35QPA		
				RAK-50QPA		
SPX-SPF6		Stainless steel pre-filter	RAK-18PPA	RAK-18PPB	RAK-18PEA	RAK-18PEB
			RAK-25PPA	RAK-25PPB	RAK-25PEA	RAK-25PEB
			RAK-35PPA		RAK-35PEA	RAK-35PEB
					RAK-50PEA	RAK-50PEB
SPX-SPF7		Stainless steel pre-filter	RAK-35PPB			
			RAK-50PPB			

Clean contact kit table

CODE	image	applicable to indoor units							
SPX-WDC1			RAK-18PPA	RAK-18PEA		RAK-18QXA	RAK-18QPA		
		RAK-25PXA	RAK-25PPA	RAK-25PEA	RAF-25PXA	RAK-25QXA	RAK-25QPA	RAF-25RPA	
		RAK-35PXA	RAK-35PPA	RAK-35PEA	RAF-35PXA	RAK-35QXA	RAK-35QPA	RAF-35RPA	
		RAK-50PXA	RAK-50PPA	RAK-50PEA	RAF-50PXA	RAK-50QXA	RAK-50QPA	RAF-50RPA	
SPX-WDC2			RAD-18RPA	RAI-25RPA					
		RAD-50PPA	RAD-25RPA	RAI-35RPA					
		RAD-60PPA	RAD-35RPA	RAI-50RPA					
		RAD-70PPA	RAD-50RPA						
SPX-WDC3			RAK-18PSB	RAK-18PXB	RAK-18PPB	RAK-18PEB			
			RAK-25PSB	RAK-25PXB	RAK-25PPB	RAK-25PEB			
			RAK-35PSB	RAK-35PXB	RAK-35PPB	RAK-35PEB			
					RAK 50PPB	RAK-50PEB			
SPX-WDC4		RAK-60PPA							
		RAK-70PPA							

Setting for clean contact Kit

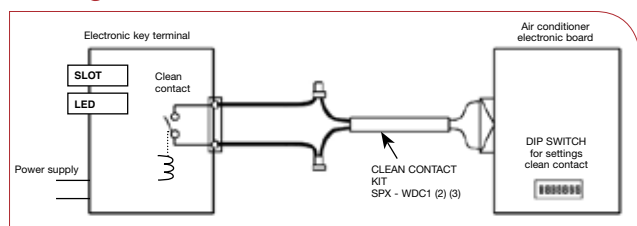

The following parameters are to be set on the DIP SWITCH:
 Enable / disable clean contact function
 Contact setting normally open / normally closed

Table of other accessories

CODE	image	description	Applicable to indoor units
SPX-DST1		signal distributor	all RACs
SPX-WDST8M		distributor / indoor unit connecting cable	
PSC-6RAD		H-Link adapter for residential	

HITACHI's Alarm Code APP



The new **APP** is now available to provide you with instantaneous, **round the clock** access to alarm codes and technical details, thus making your job even easier and quicker.

The iOS and Android version is available as of now, to be followed shortly by the WEB APP version as well.

For a professional and guaranteed service, always and in any case contact an authorised HITACHI Service Centre.

Quality Certification



By using the new web application, all technical details relevant to energy performance of HITACHI products may be viewed and the relevant technical documentation may be downloaded.

<http://erpactive.hitachiaircon.com/it/>



Products marked with this symbol comply with the ErP Directive (Energy Related Products) and contribute to reducing the building's energy consumption.



The Hitachi Air Conditioning Products Europe production facility (HAPE - Barcelona, Spain) has acquired the International Standard Quality Management System ISO 9001 and ISO 14001 certification. HAPE implements strict product quality control via a number of ambient tests. HITACHI units are produced according to this ISO certification system.



The Hitachi Air Conditioning Systems Co, Ltd production facility (Shimizu, Japan) has acquired the International Standard Quality Management System ISO 9001 and ISO 14001 certification. Shimizu implements strict product quality control via a variety of ambient tests, exacting heating tests and a number of other tests on the compressors. HITACHI units are produced according to the ISO certification system.



The Hitachi Air Conditioning Products (M) Sdn.Bhd production facility (HAPM - Kuala Lumpur, Malaysia) has acquired the International Standard Quality Management System ISO 9001 and ISO 14001 certification. HAPM implements strict product quality control via a number of ambient tests. HITACHI units are produced according to the ISO certification system.

The Tochigi production facility and other subsidiary factories have acquired the International Standard Quality Management System ISO 9001 and ISO 14001 certification. The Tochigi production facility implements strict product quality control through a number of ambient tests. HITACHI units are produced according to the ISO certification system.

All Hitachi products feature the required "CE" mark, as well as taking part in the EUROVENT certification program. Participation in this program offers an additional guarantee for installers and end users because performance and all the most significant operation parameters are impartially certified.

