


1-way Air Discharge Cassette Type

MMU-AP0074YH-E
MMU-AP0094YH-E
MMU-AP0124YH-E
MMU-AP0154SH-E
MMU-AP0184SH-E
MMU-AP0244SH-E

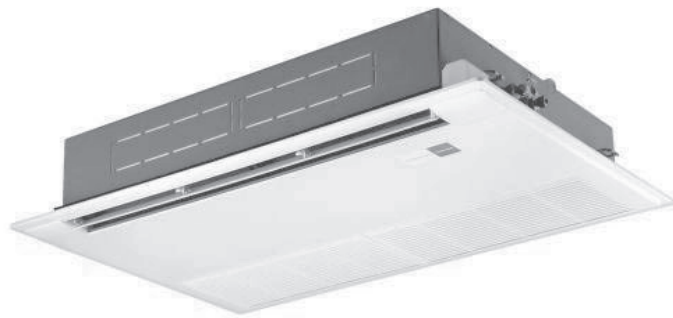

Contents

1. Specifications
2. Dimensions
3. Center of gravity
4. Piping diagram
5. Wiring diagram
6. Electrical characteristics
7. Sensible capacity table
8. Air flow distance chart
9. Sound data
10. Accessories
11. Reference

1. Specifications




Model name			MMU-	AP0074YH-E	AP0094YH-E	AP0124YH-E	AP0154SH-E	AP0184SH-E	AP0244SH-E
Cooling/Heating capacity(*1)			kW	2.2 / 2.5	2.8 / 3.2	3.6 / 4.0	4.5 / 5.0	5.6 / 6.3	7.1 / 8.0
Electical characteristics	Power supply			1 phase 50Hz 220-240V / 1 phase 60Hz 220V (Sepatate power supply for indoor units is required.)					
	Running current	50 Hz	A	0.24			0.34	0.37	0.62
		60 Hz		0.26			0.35	0.39	0.62
	Power consumption		kW	0.053 / 0.056			0.042 / 0.041	0.046 / 0.045	0.075 / 0.073
	Starting current		A	0.60 / 0.60			0.51 / 0.53	0.54 / 0.54	0.80 / 0.80
Appearance	Main unit			Heat-instulating material attached Zinc hot dipping steel plate					
Ceiling panel	Model			RBC-UY135PG			RBC-US21PGE		
Panel colour				Moon white(Munsell 2.5GY9.0/0.5)					
Outer dimension	Main unit	Height	mm	235			200		
		Width	mm	850			1000		
		Depth	mm	400			710		
	Ceiling panel	Height	mm	18			20		
		Width	mm	1050			1230		
		Depth	mm	470			800		
Total weight	Main unit		kg	22			21		22
	Ceiling panel		kg	3.5			5.5		
Heat exchanger				Finned tube					
Sound proof / Heat-insulating material				Non-flammable insulation			Polyethylene foam + Expanded polyethylene		
Fan unit	Fan			Centrifugal fan					
	Standard air flow (High/Mid./Low)		m³/h	540 / 480 / 420			750 / 690 / 630	780 / 720 / 660	1140 / 960 / 810
	Motor output		W	22			30		
Air filter				Standard filter (Long life filter)					
Controller				Remote controller					
Connecting pipe	Gas pipe		mm	Ø 9.5			Ø 12.7		Ø 15.9
	Liquid pipe		mm	Ø 6.4					Ø 9.5
	Drain port (Nominal dia.)		mm	25 (Polyvinyl chloride tube)					
Sound pressure level (High/Mid/Low)			dB(A)	42 / 39 / 34			37 / 35 / 32	38 / 36 / 34	45 / 41 / 37

Note


(*1) Rated conditions Cooling : Indoor 27 degC Dry Bulb / 19 degC Wet Bulb, Outdoor 35 degC Dry Bulb.
 Heating : Indoor 20 degC Dry Bulb, Outdoor 7 degC Dry Bulb / 6 degC Wet Bulb.
 Based on equivalent piping length of 7.5 m and piping height difference of 0 m.

2. Dimensions

MMU-AP0074YH-E, AP0094YH-E, AP0124YH-E

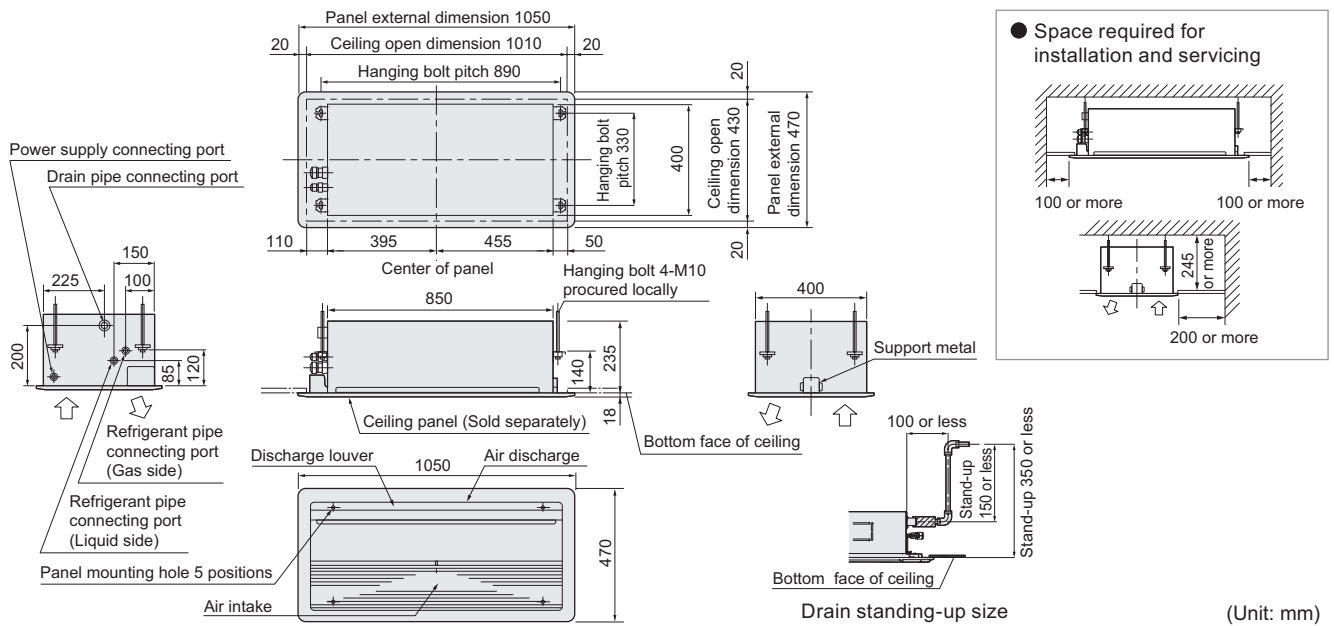


MMU-AP0154SH-E, AP0184SH-E, AP0244SH-E

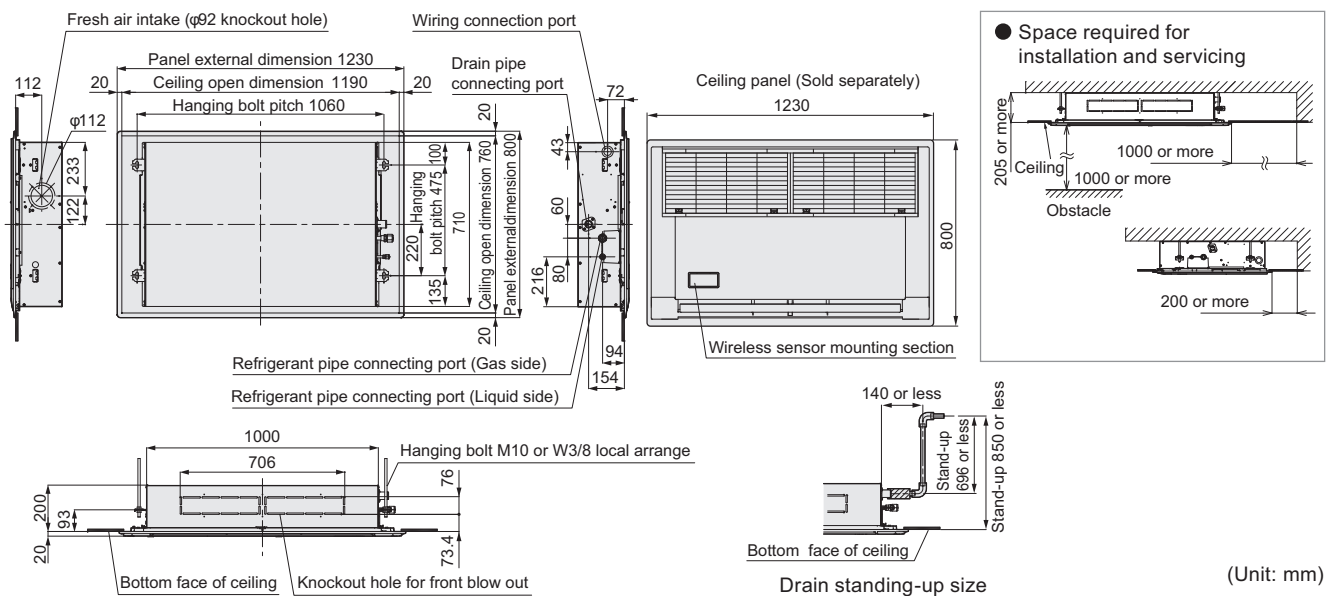

3. Center of gravity


1-way YH Type

Model name	X(mm)	Y(mm)	Z(mm)	Total weight(kg)	
				Main unit	Ceiling panel
MMU-AP0074YH-E	500	230	120	22	3.5
MMU-AP0094YH-E					
MMU-AP0124YH-E					

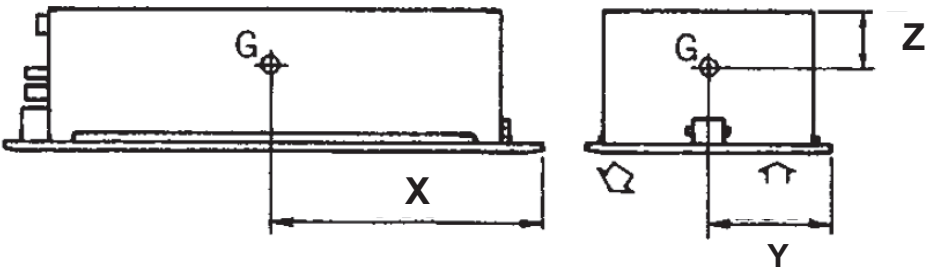


1-way SH Type

Model name	X(mm)	Y(mm)	Z(mm)	Total weight(kg)	
				Main unit	Ceiling panel
MMU-AP0154SH-E	370	475	80	21	5.5
MMU-AP0184SH-E				22	
MMU-AP0244SH-E					

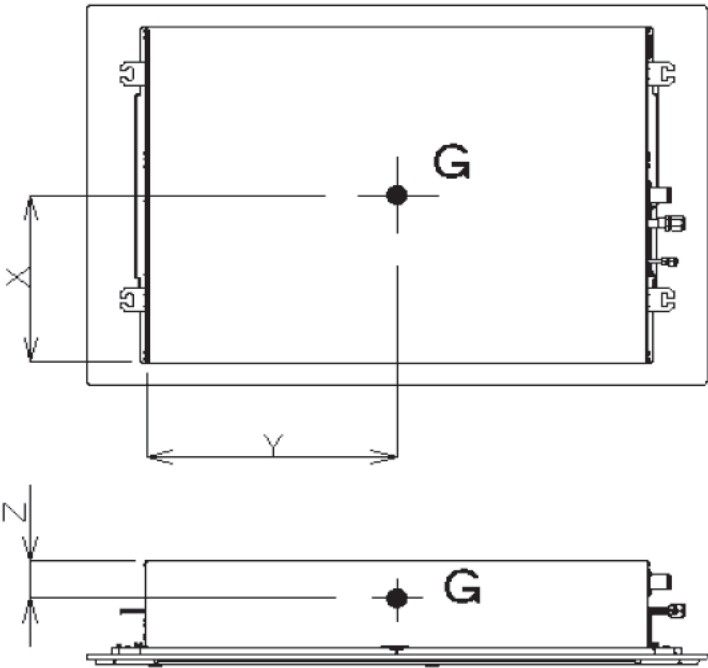


4. Piping diagram

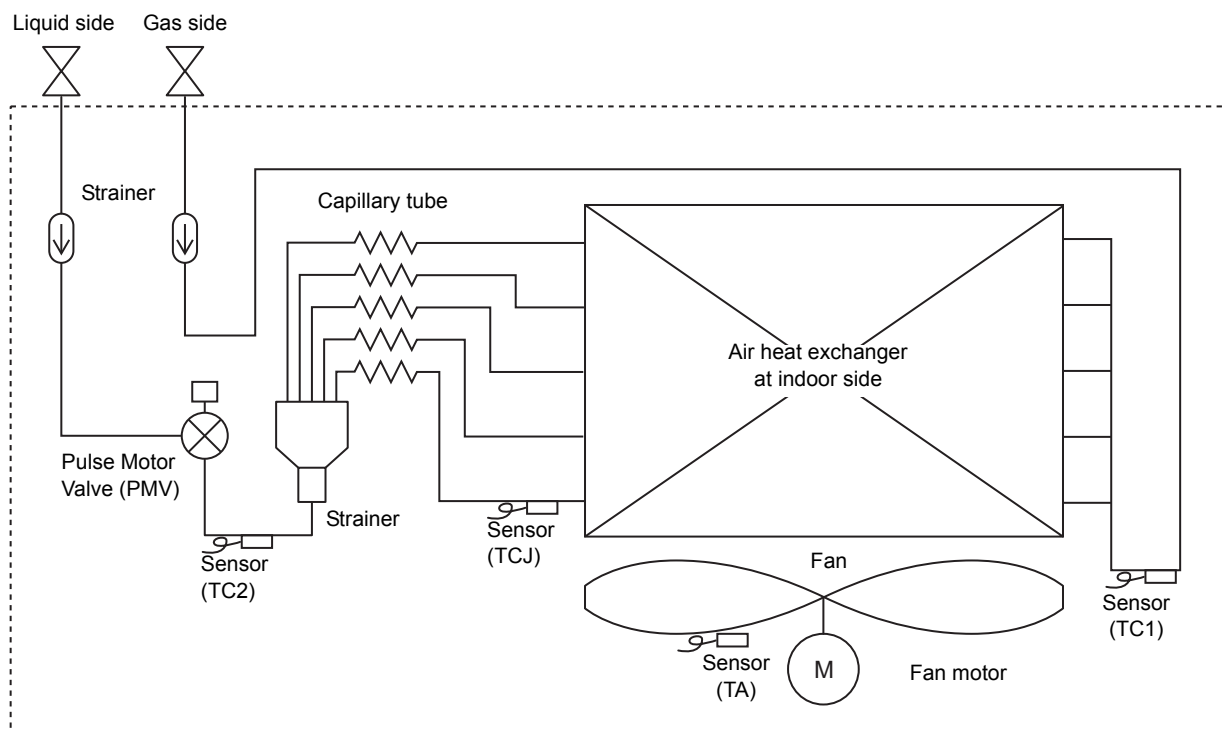

Functional part name		Functional outline
Pulse Motor Valve	PMV	(Connector CN082 (6P): Blue) 1) Controls super heat in cooling operation 2) Controls sub cool in heating operation 3) Recovers refrigerant oil in cooling operation 4) Recovers refrigerant oil in heating operation
Temp. sensor	1. TA	(Connector CN104 (2P): Yellow) 1) Detects indoor suction temperature
	2. TC1	(Connector CN100 (3P): Brown) 1) Controls PMV super heat in cooling operation
	3. TC2	(Connector CN101 (2P): Black) 1) Controls PMV sub cool in heating operation
	4. TCJ	(Connector CN102 (2P): Red) 1) Controls PMV super heat in cooling operation


5. Wiring diagram

MMU-AP0074YH-E, AP0094YH-E, AP0124YH-E

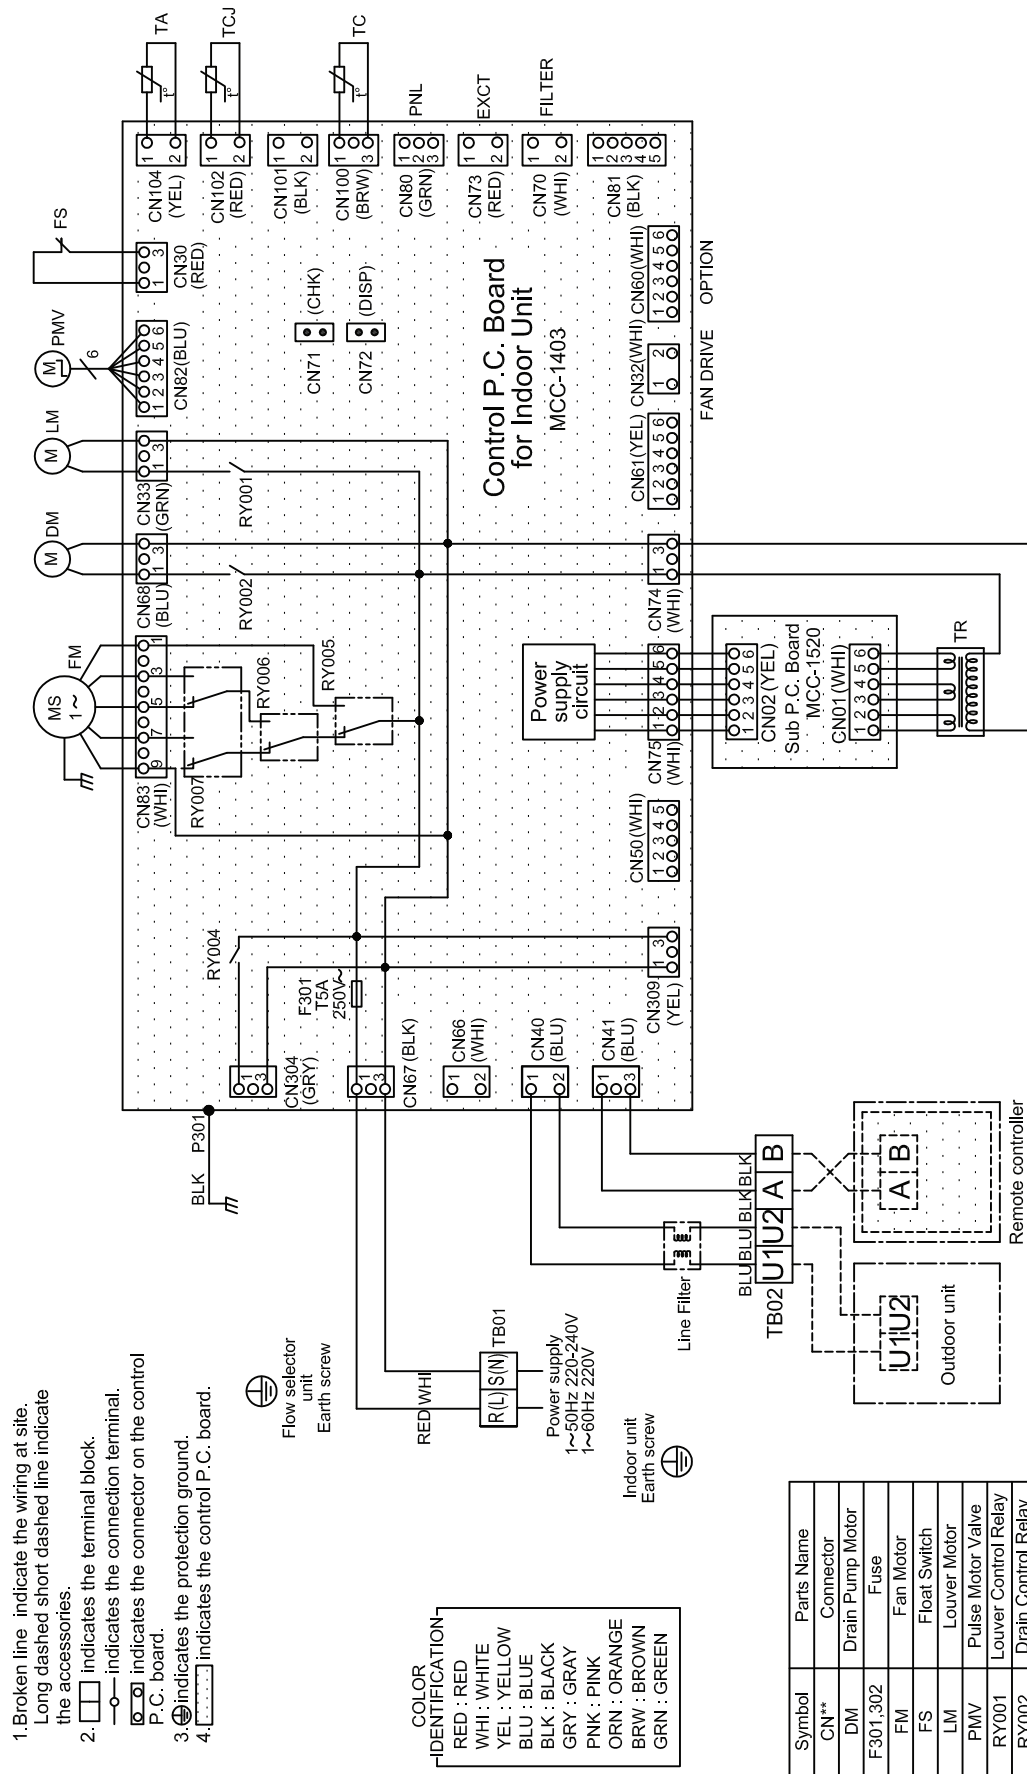

Symbol	Parts Name
CN**	Connector
DM	Drain Pump Motor
F301.302	Fuse
FM	Fan Motor
FS	Float Switch
LM	Louver Motor
PMV	Pulse Motor Valve
RY001	Louver Control Relay
RY002	Drain Control Relay
RY005.005.007	Fan Motor Control Relay
TA	Indoor temp sensor
TB01.02	Terminal Block
TC,TCJ	Temp sensor
TR	Transformer

MMU-AP0154SH-E, AP0184SH-E, AP0244SH-E

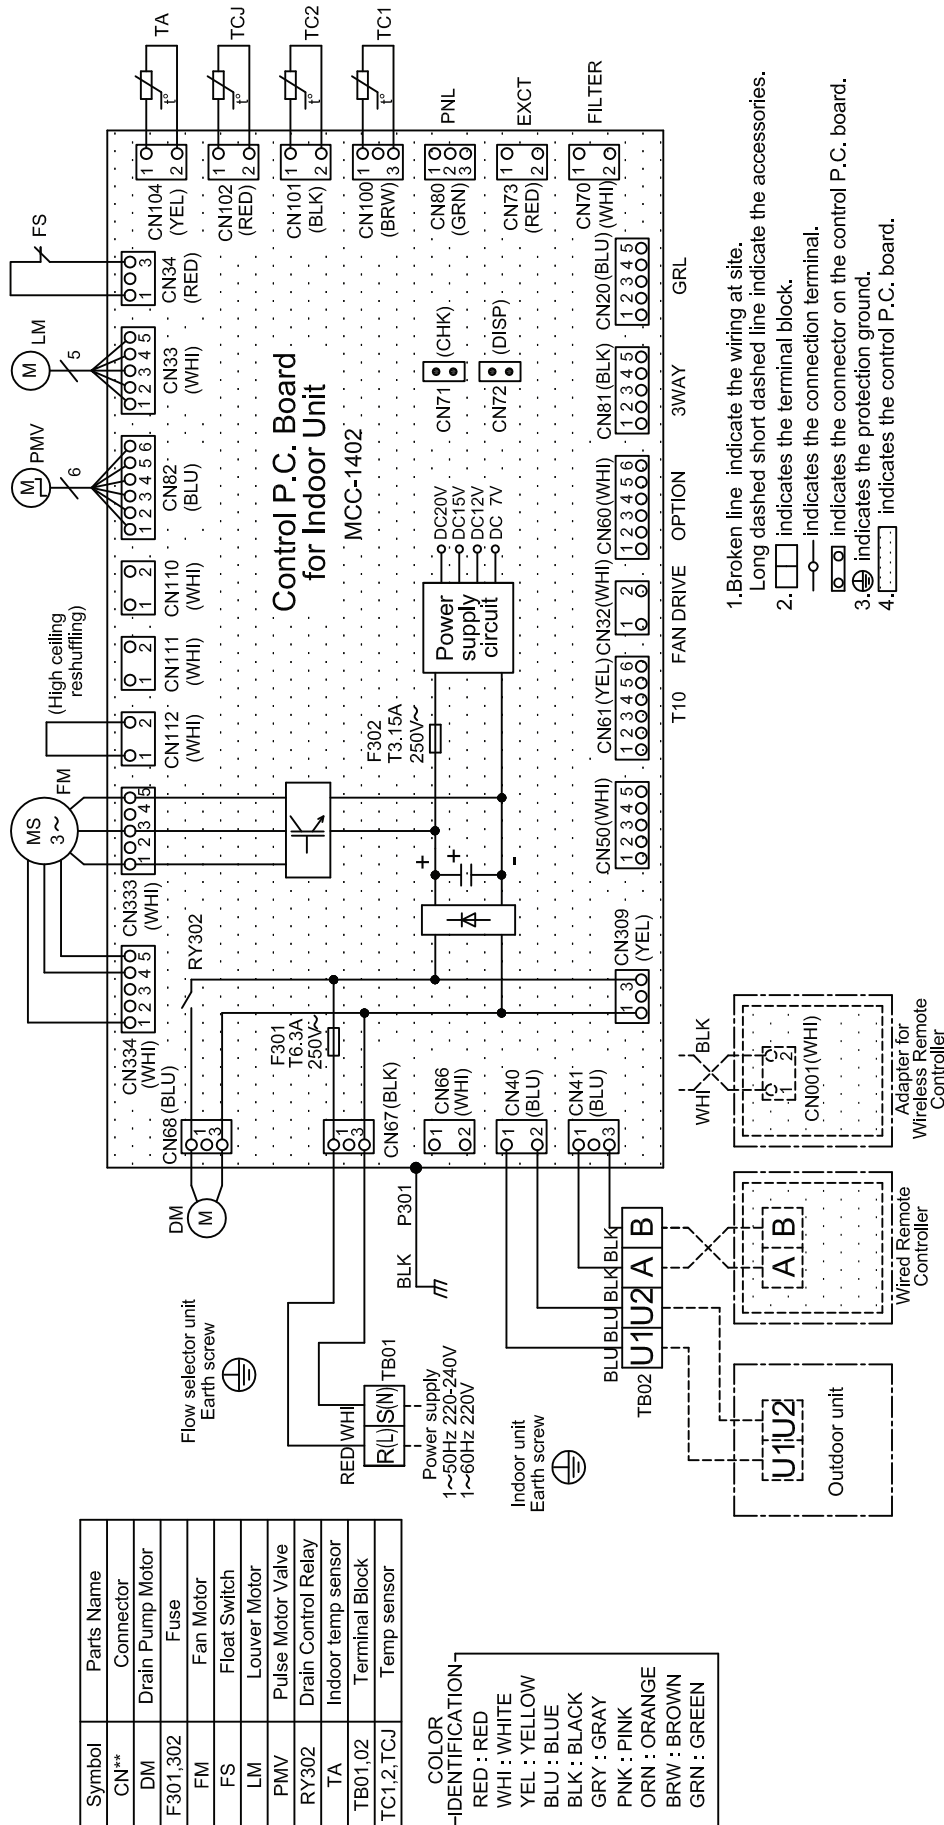

6. Electrical characteristics

1. 50 Hz

Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
		Min	Max	kW	FLA	MCA	MOCP
MMU-AP0074YH-E	230-1-50	198	264	0.022	0.28	0.35	15
MMU-AP0094YH-E	230-1-50	198	264	0.022	0.28	0.35	15
MMU-AP0124YH-E	230-1-50	198	264	0.022	0.28	0.35	15
MMU-AP0154SH-E	230-1-50	198	264	0.030	0.40	0.49	15
MMU-AP0184SH-E	230-1-50	198	264	0.030	0.42	0.53	15
MMU-AP0244SH-E	230-1-50	198	264	0.030	0.71	0.88	15

MCA: Minimum Circuit Amps

FLA : Full Load Amps

MOCP: Maximum Overcurrent Protection (Amps) kW : Fan motor Rated Output (kW)

2. 60 Hz

Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
		Min	Max	kW	FLA	MCA	MOCP
MMU-AP0074YH-E	220-1-60	198	242	0.022	0.30	0.37	15
MMU-AP0094YH-E	220-1-60	198	242	0.022	0.30	0.37	15
MMU-AP0124YH-E	220-1-60	198	242	0.022	0.30	0.37	15
MMU-AP0154SH-E	220-1-60	198	242	0.030	0.40	0.50	15
MMU-AP0184SH-E	220-1-60	198	242	0.030	0.45	0.57	15
MMU-AP0244SH-E	220-1-60	198	242	0.030	0.75	0.94	15

MCA: Minimum Circuit Amps

FLA : Full Load Amps

MOCP: Maximum Overcurrent Protection (Amps) kW : Fan motor Rated Output (kW)

7. Sensible capacity table

1-way Air Discharge Cassette Type (MMU-AP__4YH-E)

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	12.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	14.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	16.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	18.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	20.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	21.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	23.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	25.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	27.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	29.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	31.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	33.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	35.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
009	10.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	12.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	14.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	16.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	18.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	20.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	21.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	23.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	25.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	27.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	29.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	31.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	33.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	35.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
012	10.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	12.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	14.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	16.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	18.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	20.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	21.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	23.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	25.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	27.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	29.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	31.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	33.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	35.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	37.0	2.9	2.3	3.2	2.5	3.4	2.6	3.5	2.6	3.6	2.6	3.8	2.6	4.0	2.5
	39.0	2.8	2.3	3.1	2.4	3.3	2.5	3.4	2.5	3.5	2.5	3.7	2.5	3.9	2.5

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

1-way (SH series) Air Discharge Cassette Type (MMU-AP__4SH-E)





unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
015	10.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	12.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	14.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	16.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	18.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	20.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	21.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	23.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	25.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	27.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	29.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	31.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	33.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	35.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	37.0	3.6	2.7	4.0	2.9	4.2	3.1	4.4	3.1	4.5	3.1	4.7	3.1	5.0	3.0
	39.0	3.5	2.7	3.8	2.8	4.1	3.0	4.2	3.0	4.4	3.0	4.6	3.0	4.8	2.9
018	10.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	12.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	14.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	16.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	18.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	20.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	21.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	23.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	25.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	27.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	29.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	31.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	33.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	35.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	37.0	4.5	3.3	4.9	3.6	5.3	3.8	5.4	3.8	5.6	3.8	5.9	3.7	6.2	3.7
	39.0	4.3	3.3	4.8	3.5	5.1	3.7	5.3	3.7	5.4	3.7	5.7	3.6	6.0	3.6
024	10.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	12.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	14.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	16.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	18.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	20.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	21.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	23.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	25.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	27.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	29.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	31.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	33.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	35.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	37.0	5.6	4.3	6.2	4.6	6.7	4.9	6.9	4.8	7.1	4.8	7.5	4.8	7.8	4.7
	39.0	5.5	4.2	6.1	4.4	6.5	4.7	6.7	4.7	6.9	4.7	7.3	4.7	7.6	4.6

TC : Total capacity [kW]


SHC : Sensible capacity [kW]

8. Air flow distance chart


MMU-AP0074YH-E, AP0094YH-E, AP0124YH-E

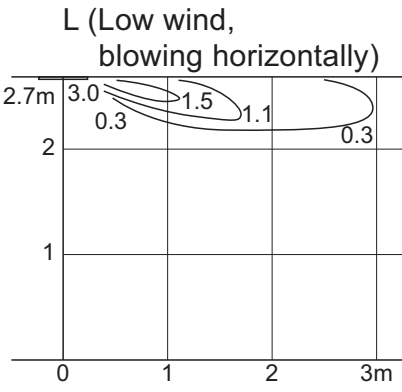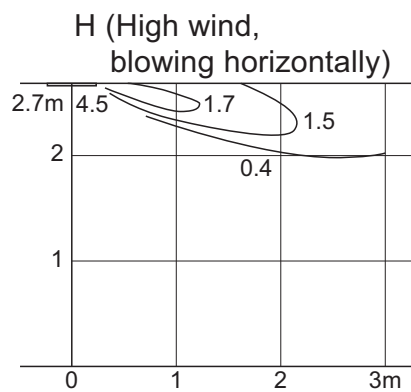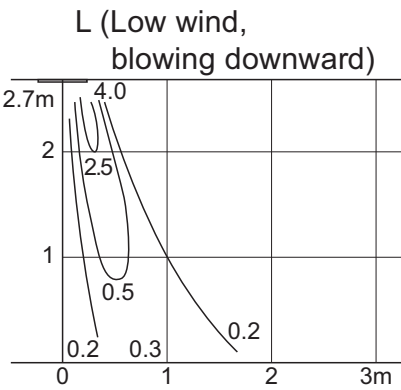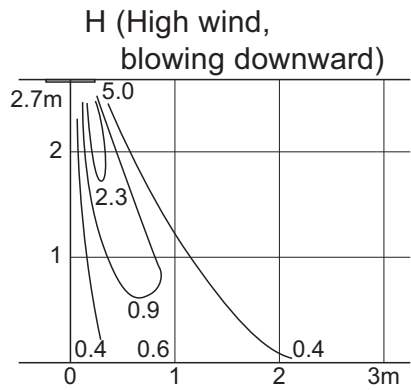

MMU-AP0154SH-E, AP0184SH-E

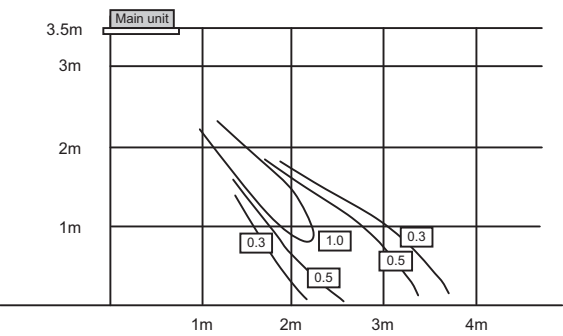


MMU-AP0244SH-E

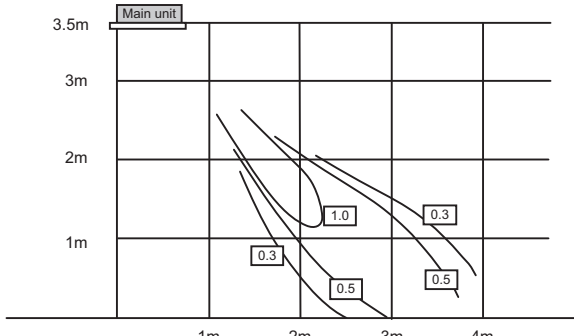


unit : [m/s]


9. Sound data

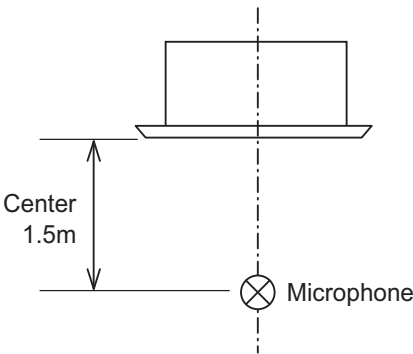


MMU-AP0074YH-E, AP0094YH-E, AP0124YH-E

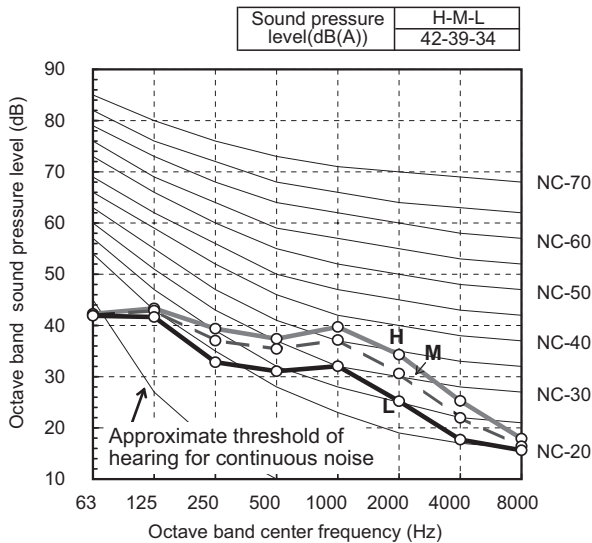


MMU-AP0154SH-E

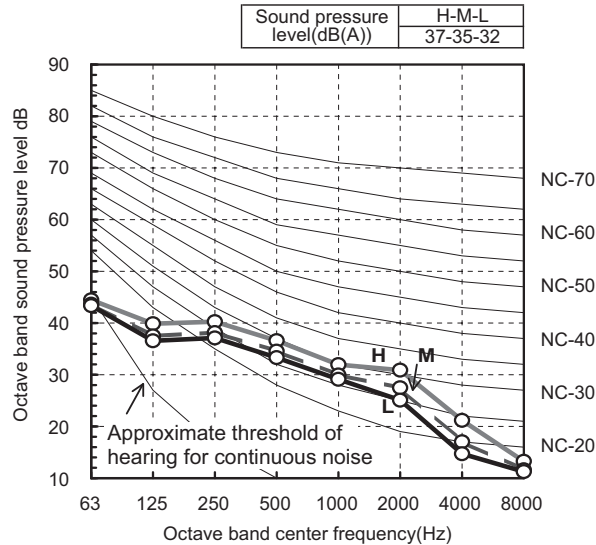

MMU-AP0184SH-E

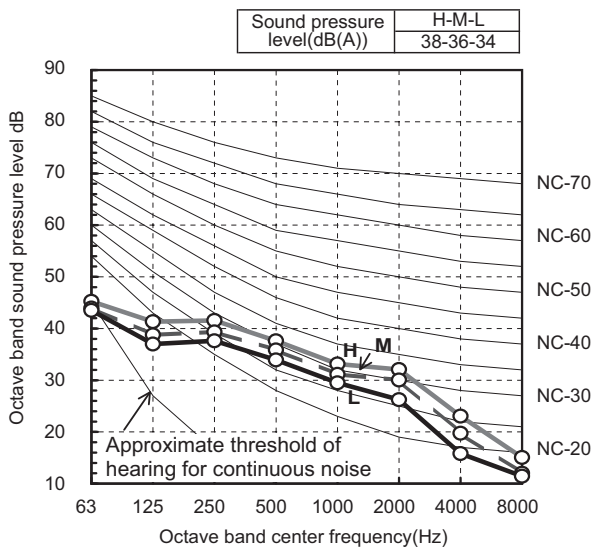


MMU-AP0244SH-E

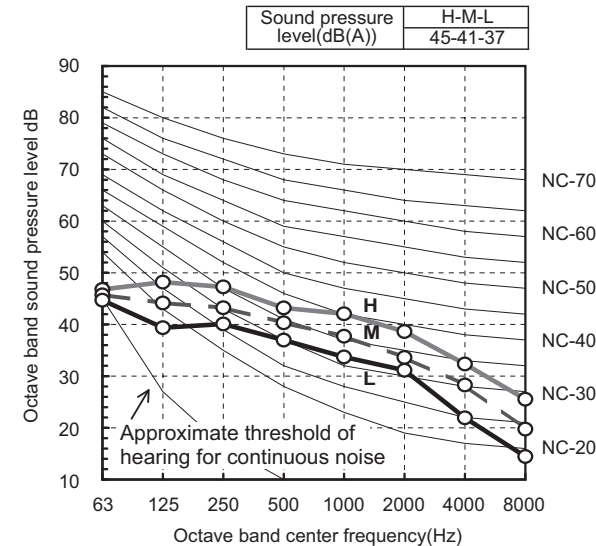

10. Accessories

Parts name	Model name	Applied model	Note	Remarks
Ceiling panel	RBC-UY136PG	MMU-AP__4YH-E	Required accessory	
	RBC-US21PGE		Required accessory	
Front air discharge unit	TCB-BUS21HWE	MMU-AP__4SH-E		
Auxiliary fresh air flange	TCB-FF101URE2		For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100 mm)	


MMU-AP0074YH-E, AP0094YH-E, AP0124YH-E

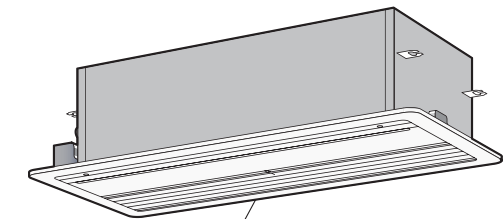

Ceiling panel
RBC-UY136PG

Auxiliary freash air flange
TCB-FF101URE2

Front air discharge unit
TCB-BUS21HWE

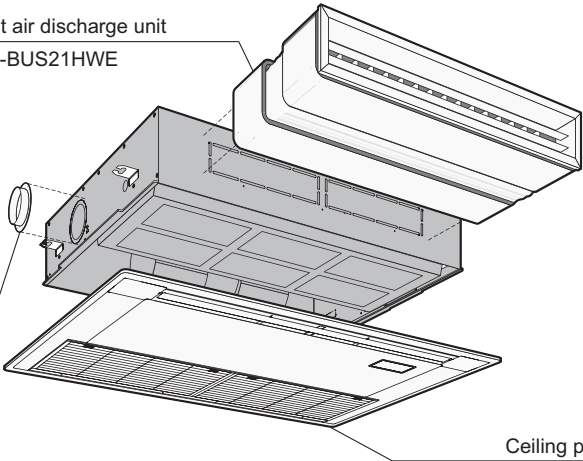

Ceiling panel
RBC-US21PGE

MMU-AP0154SH-E, AP0184SH-E, AP0244SH-E

11. Reference

11-1 Fresh air intake

1-way (SH series) Air Discharge Cassette Type

Caution

The fresh air shall be conditioned by a heat reclaim ventilator or similar.

Ensure the fresh air volume is determined so that mixed suction air and fresh air can maintain the operating temperature.

*1. Recommended conditioned air temperature is 12 °C to 30 °C.

However, Make a fresh air volume within 5% of standard.



Model name	MMU-	AP0154SH-E	AP0184SH-E	AP0244SH-E
Standard air flow	m³/h	750	780	1140

Install a filter within the fresh air duct.

(Fresh air does not pass through the filter of Indoor unit.)

Insulate the fresh air duct.

Electrically connect the fan of the Heat exchanger unit and the Indoor unit to a single isolator.

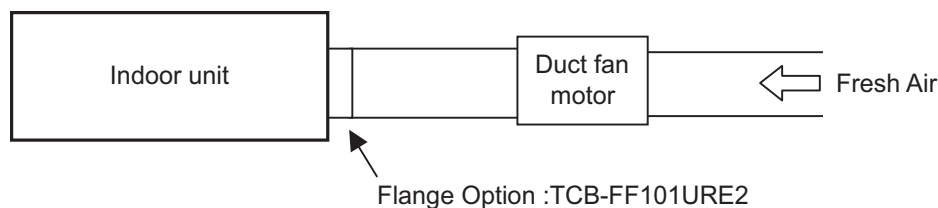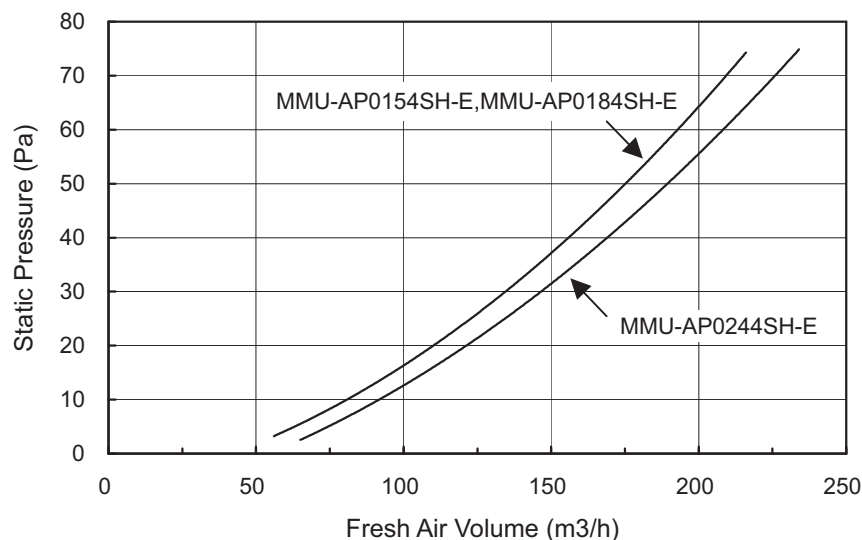

Inter - lock circuit

Connect the driving relay of the duct fan (DC 12V) between 1 and 6 on the indoor P.C. board.

(Rated current of the relay for duct fan should be up to 75mA.)

After installation, carry out a test run to check that the duct fan of the indoor unit start/stop simultaneously.

(Carry out the test run following the installation manual of the indoor unit.)

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

1-way Air Discharge Cassette Engineering Data Book

Model name:

MMU-AP_4YH-E

MMU-AP_4SH-E

May, 2013 First Edition

TOSHIBA CARRIER CORPORATION