EV1527 OTP Encoder

EV1527 Description: (Compatible:EV1527,RT1527,FP1527)

EV1527 is OTP Encoder utilizing CMOS technology process. EV1527 hai a maximum of 20 bits providing up to 1 million codes. It can reduce any code collision and unauthorized code scanning possibilities.

EV1527 Features: (Compatible: EV1527, RT1527, FP1527)

CMOS Technology

Low stand by Current: 1.0uA

Wide range of Operating Voltage: $Vcc = 3.0 \sim 12V$

Up to 4 data pins

Total 1048576 address codes

Single Resistor Oscillator

Available in DIP and SOP Package

EV1527 Pin out: (Compatible:EV1527,RT1527,FP1527)

EV1527 Pin Description: (Compatible:EV1527,RT1527,FP1527)


	~~	- 10 010 110 (0 0 111 10 10 10 10 10 10 10 10 10 10 10 10 10 10	
Pin No.	Name	Description	I/O
1	OCSI	Oscillator input pull-up R to Vcc	I
2	Vcc	Positive power supply	
3	GND	Ground	
4	Dout	Data output pin	О
5	K0	Data input with pull-low R	I
6	K1	Data input with pull-low R	I
7	K2	Data input with pull-low R	I
8	K3	Data input with pull-low R	I

EV1527 OTP Encoder

EV1527 Output format: (Compatible:EV1527,RT1527,FP1527)

Output data frame:

Preambl	C0 ~ C19 (1 million codes)	D0	D1	D2	D3
e					

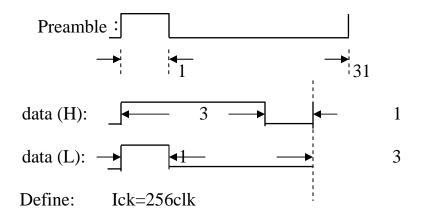

EV1527 K0~K3 combination Table: (Compatible:EV1527,RT1527,FP1527)

					` 1					
K3	K	2	K 1	K	0	D3	D2		D 1	D
0	0	0	1			0	0	0	1	
0	0	1	0			0	0	1	0	
0	0	1	1			0	0	1	1	
0	1	0	0			0	1	0	0	
0	1	0	1			0	1	0	1	
0	1	1	0			0	1	1	0	
0	1	1	1			0	1	1	1	
1	0	0	0			1	0	0	0	
1	0	0	1			1	0	0	1	
1	0	1	0			1	0	1	0	
1	0	1	1			1	0	1	1	
1	1	0	0			1	1	0	0	
1	1	0	1			1	1	0	1	
1	1	1	0			1	1	1	0	
1	1	1	1			1	1	1	1	

EV1527 Absolute Maximum Rating: (Compatible:EV1527,RT1527,FP1527)

Symbol	Parameter	Conditions	Rating	Unit
Vcc	Supply voltage		-0.3 ~ 13	V
VI	Input voltage		-0.3 ~ Vcc+0.3	V
Vo	Output voltage		-0.3 ~ Vcc+0.3	V
Tst	Storage temp		-40 ~ 125	$^{\circ}$ C
Top	Operating temp		-20 ~ 70	$^{\circ}$ C
Pdis	Max.power dissp	Vcc = 12V	300	mW

Silvan Chip Electronics Tech.Co.,Ltd.

Address: Fl.16 FuChang Building, Binhe Rd, Shenzhen, China

Phone: 86-0755-88291843 88304213 **Fax** : 86-0755-88290509


Email: jja@sc-tech.cn Http:// www.sc-tech.cn

EV1527 OTP Encoder

EV1527 Rosc & data cycle:(Compatible:EV1527,RT1527,FP1527)

Rosc& TD:									
	12V	11V	10V	9V	8V	7V	6V	5V	4V
300K	1.34ms	1.37ms	1.41ms	1.45ms	1.5ms	1.57ms	1.66ms	1.79ms	1.99ms
330K	1.48ms	1.51ms	1.55ms	1.59ms	1.64ms	1.71ms	1.81ms	1.94ms	2.19ms
360K	1.71ms	1.75ms	1.79ms	1.84ms	1.91ms	1.99ms	2.11ms	2.27ms	2.53ms
390K	1.82ms	1.86ms	1.91ms	1.96ms	2.03ms	2.11ms	2.24ms	2.401ms	2.69ms
430K	2.035ms	2.085ms	2.135ms	2.195ms	2.265ms	2.365ms	2.505ms	2.705ms	3.01ms

EV1527 Schematic diagram:(Compatible:EV1527,RT1527,FP1527)

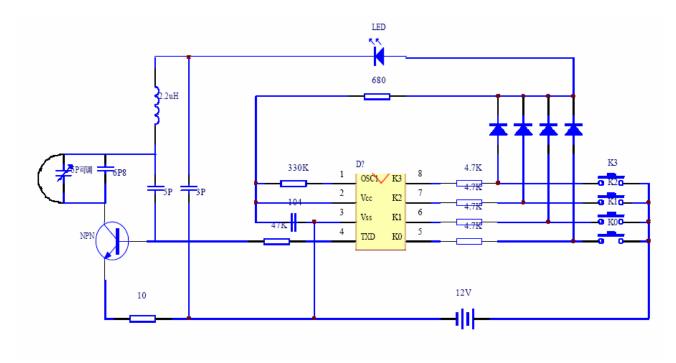

Email: jja@sc-tech.cn Http:// www.sc-tech.cn