



Touch sampling circuit

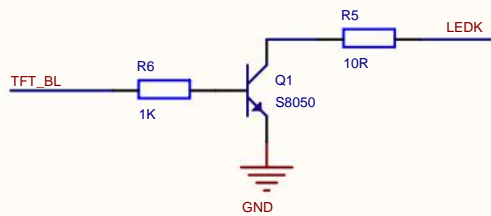


Backlight control circuit (IO or PWM control)

TFT\_BL high level enable

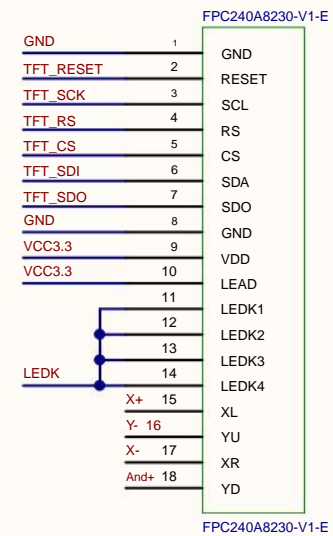


LCD screen FPC welding interface

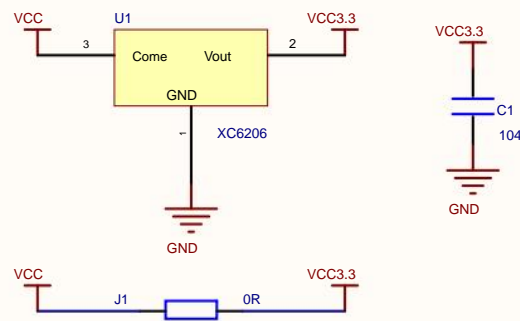


Power supply selection:

When the external VCC input is 5V, J1 is disconnected  
When the external VCC input is 3.3V, J1 is shorted




Module expansion output interface

The extended output pin header is not soldered by default

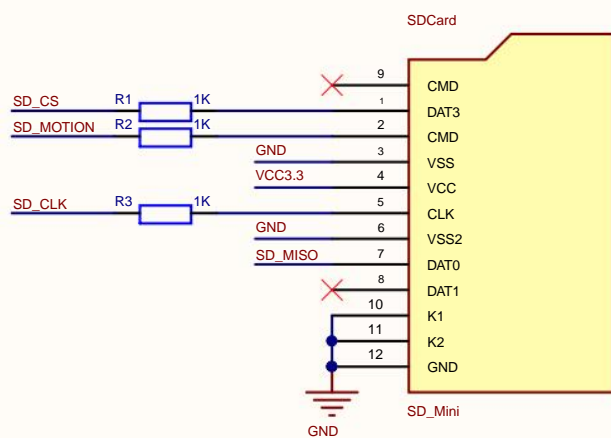

SD card interface circuit

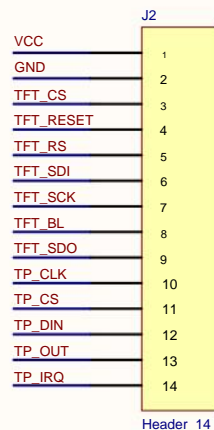

Module pin output interface

Title			
Number	Revision	Size	
A4			
Date:	2019-06-15	Sheet	of
File:	E:\project\TFT_TM022HDH26.SchDoc Drawn By:		