

WIFI camera


User Manual

Before you install and use this wireless backup camera system, please read this manual

1 Introduce

We are proud of our 100% hands-off. If you are not satisfied with your purchase for any reason, please contact us and our team will do everything in their power to ensure your satisfaction.

2 Product appearance

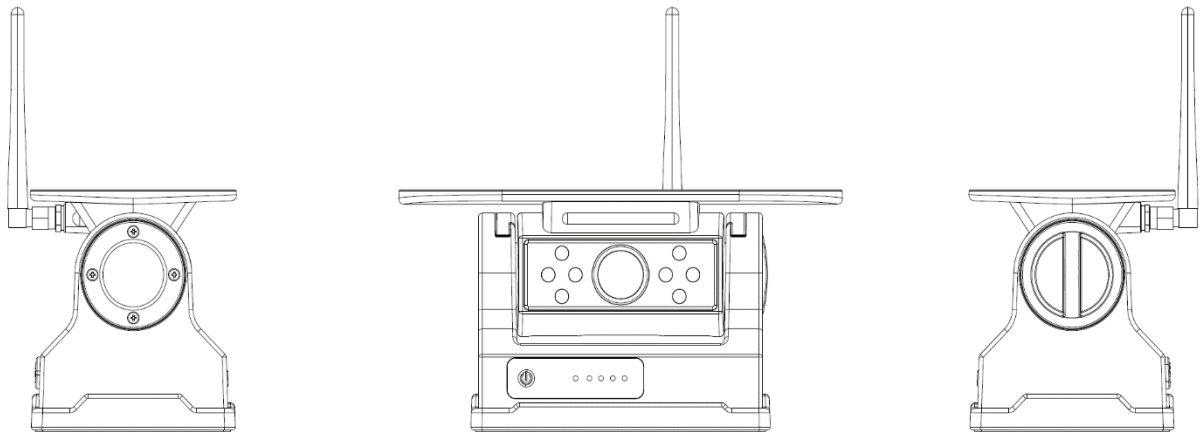

Attention:

Don't worry that the camera may get hot while working continuously, this camera comes with temperature protection. The operating temperature is -20°C-70°C.

Before connect to the cellphone, please download app form google store or website, as follows,

APP Download Instructions:

For iOS, search for "backcam" in the "App Store."

For Android (outside of China), search for "backcam" in the "Galaxy Store."

For Android (outside of China), download from the link in "Pgryer":

<https://www.pgryer.com/dSM6vf>

In the Android system, search for "e-eye" in "Google Play," and select the company name Sunway Industry.



Scan the QR code to download.

After downloading the APP installation file, please install it as prompted by the mobile phone.


Install finished the app, you will see "BackCam" icon on the mobile phone

WIFI camera operation instructions:



1.) How to Power on

Please click power button 3~5 second for power,
Power on after, the LED will show a blue indicator.

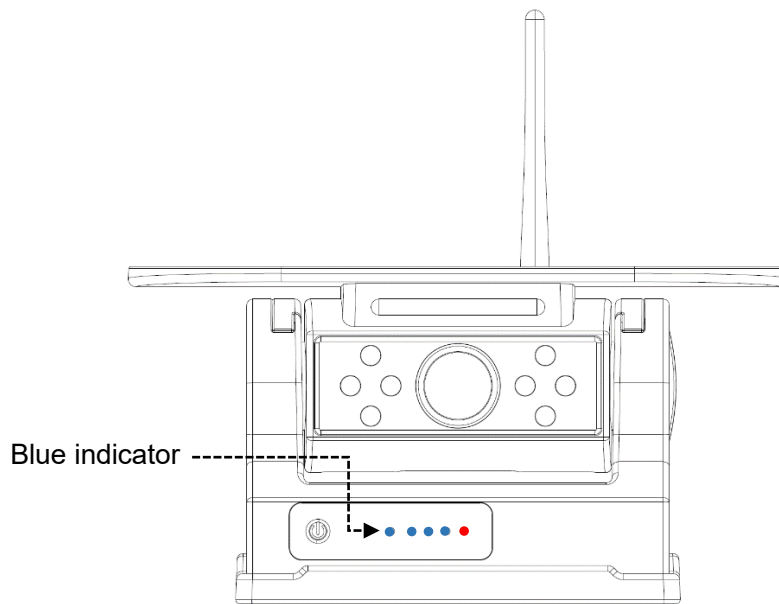


Blue LED light: there will be show remaining battery power,

- a.) 4 blue indicator the mean is battery full charged.
- b.) 3 blue indicator the mean is 75% battery power
- c.) 2 blue indicator the mean is 50% battery power
- d.) 1 blue indicator the mean is 25% battery power

If can't power on or low battery, please charge it.

2.) How to charger it.


- a.) Please use usb cable connect to the power adapter and type-c port connect to WIFI camera charger port

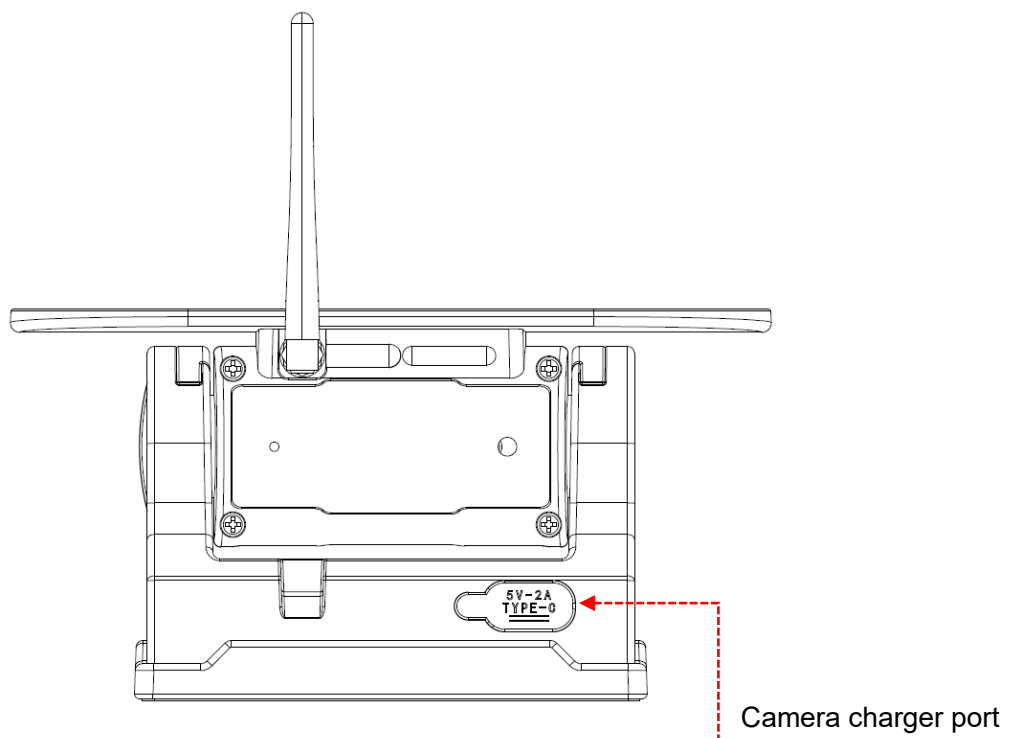

b.) Solar panel charger, please place the WIFI camera in a sunny place.
 The charging efficiency of the solar panel depends on whether the light is sufficient and the solar panel is directly facing the sunlight.


Noticed:

- a.) Power adapter need to meet DC output 5V/2A and USB port output.
- b.) For safety, it is recommended to use the adapter we recommend or provide for charging
- c.) When charged or power on the camera, the charging indicator light will show red

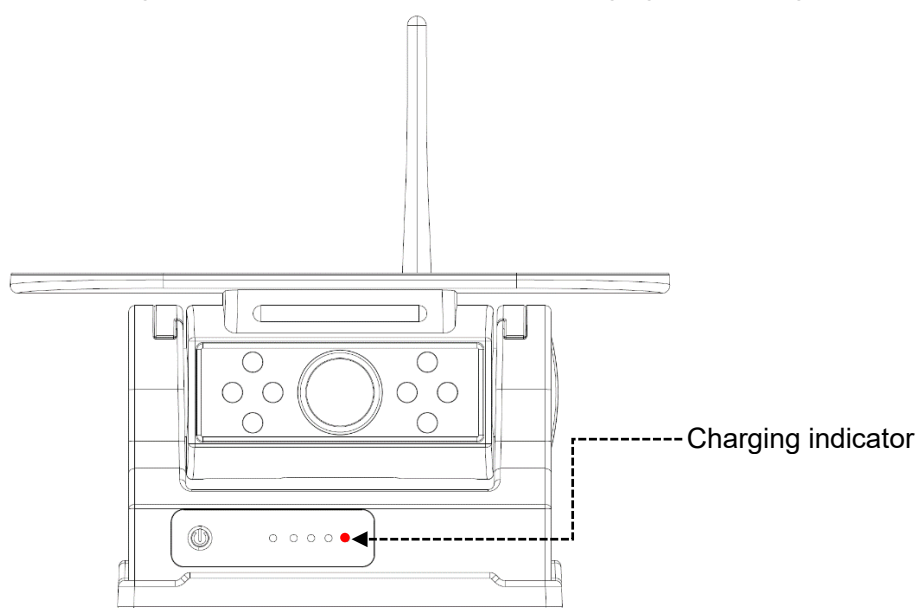

3.) How to installation wifi camera on vehicle.


WIFI Camera built-in Strong Magnetic base, with 6 Super-strong magnets than can effectively attach to the metal surface that is attracted to a magnetic.

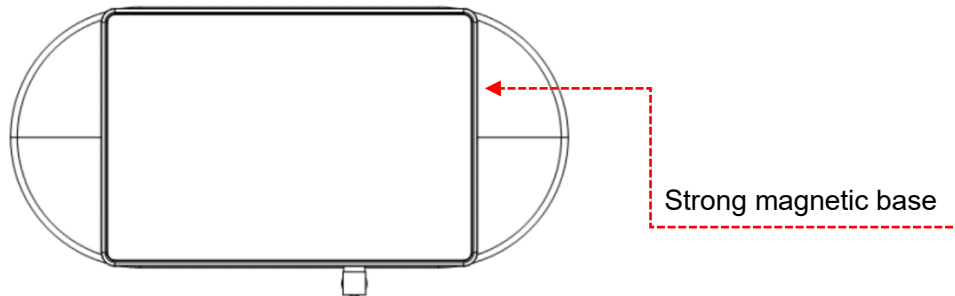

Noticed:

The camera base is affixed with a protective rubber that protects the car's paint form scratches.

4.) How to change the WIFI camera angle

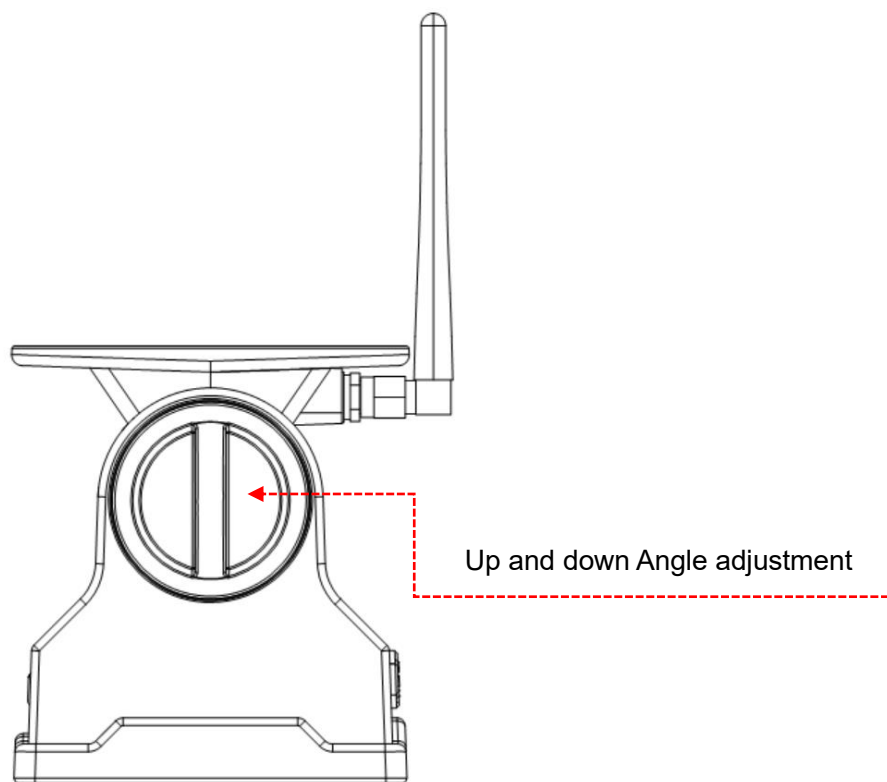


Loosen clockwise, adjust the corresponding angle, and fix counterclockwise.

5.) WIFI camera how to working

a.) Please click power button 3~5 second for power, if power on, the LED will show a blue indicator.

b.) Power on after, click mobile phone settings icon then enter to WLAN function

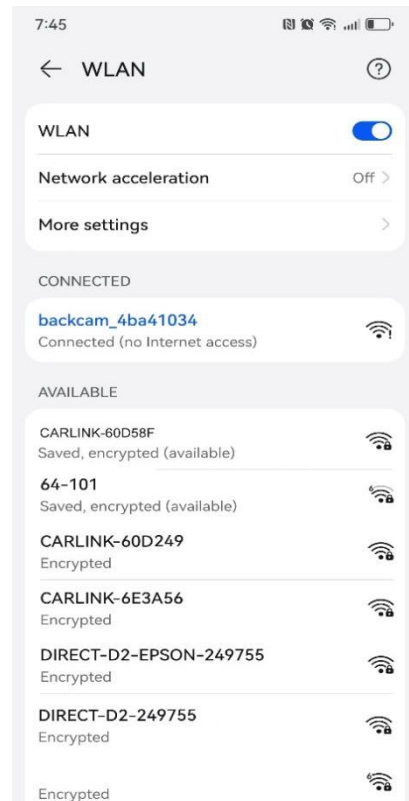


c.) Click backcam_***** Connect to WIFI camera
WiFi password: 1234567890

d.) Click Back Cam APP and Open



BackCam


e.) Open the app after, will see the wifi camera image

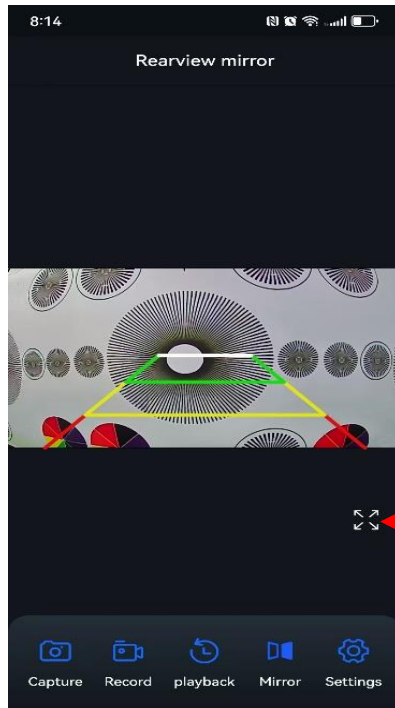

Click this icon to enter the landscape display


In this menu, you can capture picture, record, playback video file, Mirror and Settings.

- a.) **Capture:** capture picture and save mobile phone.
- b.) **Record:** click record will be start recording and video file will be save to mobile phone.
- c.) **Playback:** play recording video files
- d.) **Mirror:** can switch the original image and mirror image display pictures
- e.) **Settings:** Click setting icon, system will enter to setting menu


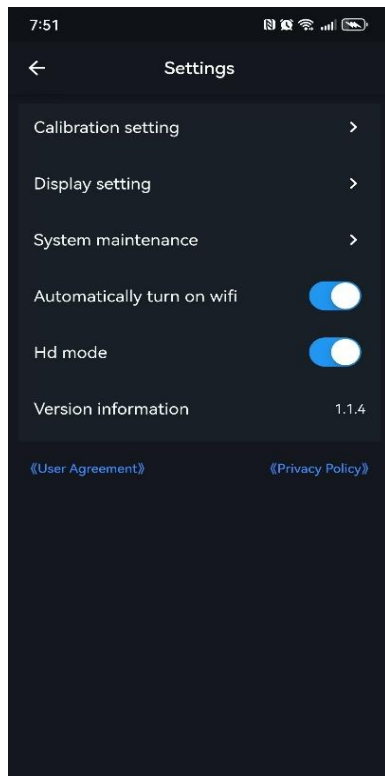




Settings including Calibration setting, Display setting , System maintenance, Automatically turn on Wifi, HD mode and version information.

Calibration setting, can setting the detection area and choice marking type.

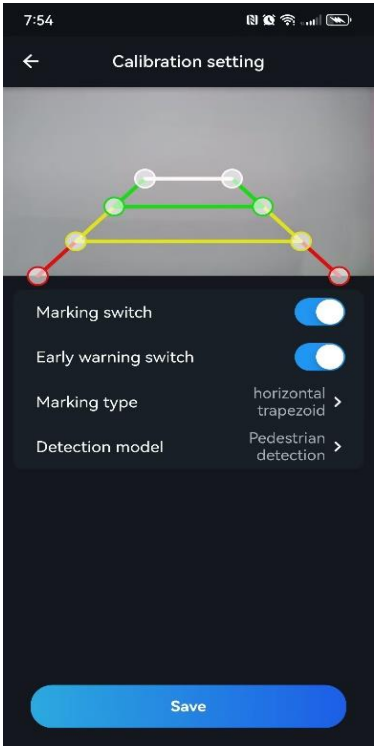


Marking type including horizontal trapezoid, semicircle, left horizontal line and right horizontal line

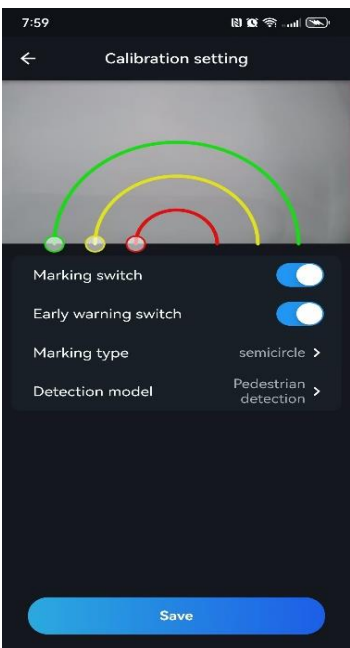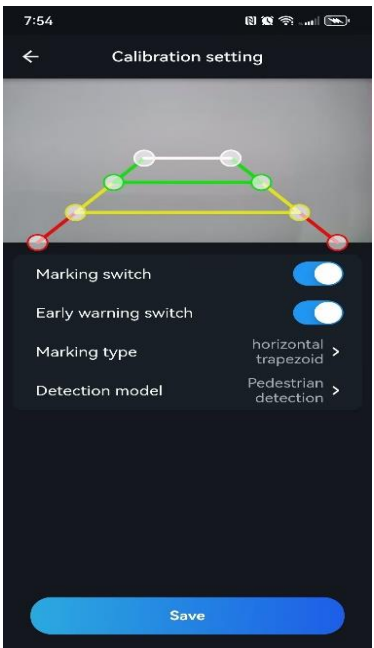


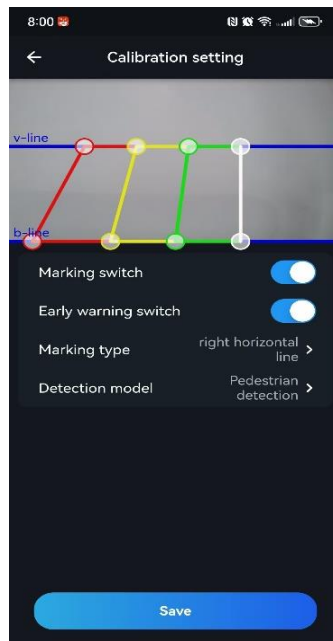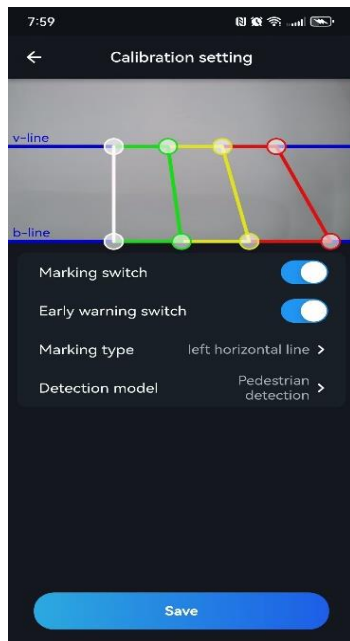

Display setting: can setting image and bit rate.

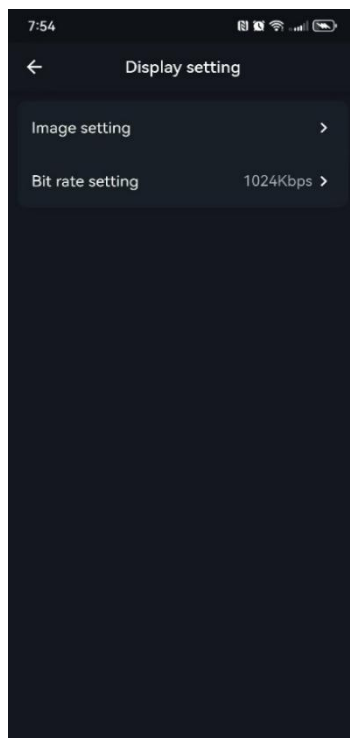

System maintenance, can import configuration and export configuration and Factory data rest

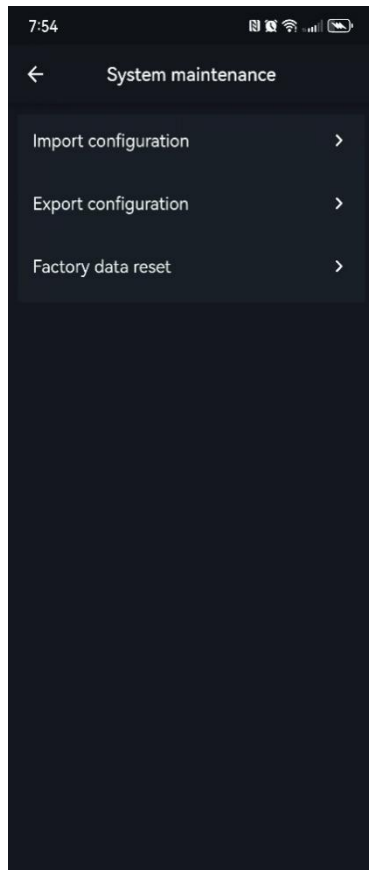**Attention:**

1. If you have any questions or need any help during use, please contact us Help first. We'll do our best. We'll fix it for you. (Please refer to the after-sales mailbox on the first page.)
2. The description may be slightly different from the product for the following reasons Different system and product versions, but does not affect the setup and use. If you need help, if you have any questions, Or if you need the latest manual, please contact us first. (Please refer to the after-sales mailbox on the first page.)

Problem solution

This problem solving section is important and it covers almost every problem our customers may have encountered over the years, so please take some time to check it out

If you have any questions or need any help with this product, please contact us first.

Question 1 no signal or can fine the wifi name.

Solution:

Cause A: The camera is not turned on or the battery is dead. Press the power button The front of the camera to turn on the camera. The blue power indicator will light up

under the following conditions

Camera turned on successfully. The number of power lights lit represents Current battery level. Please check that the power light is on. If it's not on, the battery is on

When the battery runs out, please charge the camera (connect the camera with a USB cable and use the 5V power supply as you would charge your phone). How do I check if the camera is turned on successfully?

Cover the camera's light sensor with your hand or cover the entire camera to check that the infrared light is on and glowing red. If yes, the camera is working properly.

Reason B: After your inspection, the infrared led light can be turned on, and the camera can also be turned on, if the screen still only shows "no signal", please put the monitor close to the camera to check whether the signal is weak, causing the display to lose connection. If so, please check that you have installed the antenna securely or contact us and we will send you the antenna along with the extension cord.

Cause C: After switching the channel mode, the camera needs to be restarted (shut down and then turned on), and the camera and the display can be paired to work. (For specific pairing operations,

Please refer to the section on Pairing of M buttons.)

Question 2 The camera is hot when working.

Solution: When the car is driving, the camera should work continuously, the state of high-speed data processing, so it will emit a lot of heat.

The camera is equipped with temperature protection. The operating temperature is -20C-70C. When the temperature reaches a critical value, it will automatically shut down. It will turn on when the temperature drops to the set temperature.

If you have any questions about the camera, please contact us first rather than returning it

Direct, we will not hesitate to do the best for you.

Problem 3 The signal is really bad.

Solution: Before sending each unit's signal to ours, we test it over long distances

Attention:

Whenever you need any help or have any questions or run into some problems

Products, please feel free to contact us. we'll do our best.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation configurations of the transmitter and its antenna(s).

English/Northern Ireland:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

WARNING

To avoid danger of suffocation, keep this plastic bag away from babies and children. Do not use this bag in cribs, beds, carriages or playpens. This bag is not a toy.