Kinematics and Trajectory Workshop

Michael Ziegltrum

October 13, 2026

1 Introduction

In this series of labs we will explore fundamentals of robotics in the contex of a robotic arm. This will involve implementing and tuning algorithms first in simulation then on a real robot to figure out where the arm is and control it to achieve a writing task.

There are some prerequisites needed to do these lab activities. Please fulfill these prior to the lab.

1. A working Ubuntu 22.04 installation, for Windows and Mac users via a virtual machine provider like VirtualBox `https://www.virtualbox.org/`.
2. Docker engine installed inside of the Ubuntu installation `https://docs.docker.com/engine/install/ubuntu/`. Please test by running the command 'sudo docker run hello-world' and ensure no error output.
3. About 50Gb free space on the computer.
4. Basic familiarity with ROS (ROS2 Humble) will help, doing the CLI tools tutorials and the client library tutorials up to "writing a simple publisher and subscriber" is recommended `https://docs.ros.org/en/humble/Tutorials/Beginner-CLI-Tools.html`

2 Running the Simulation and Introspection

In this section we will run the simulation and understand how the pieces of the software stack are used together.

Please build the docker file and run the simulation by following the instructions in the README.md in the code repository `https://github.com/MZandtheRaspberryPi/kinematics_workshop`. You should see a window like in figure 1 come up, which is the Graphical User Interface (GUI) of Pybullet [1], a simulator we use for the workshop. To rotate the camera hold control and left click and drag the mouse. To translate the camera hold control and hold the mouse wheel and drag the mouse. To enable/disable wireframe mode press "w" and to visualize joints when in wireframe mode press "j".

ROS2 is a middleware based on a publish/subscribe mechanism where various processes (nodes) send and receive information (messages) via various paths (topics). By using introspection tools detailed in the Beginner CLI tools tutorials answer the following questions:

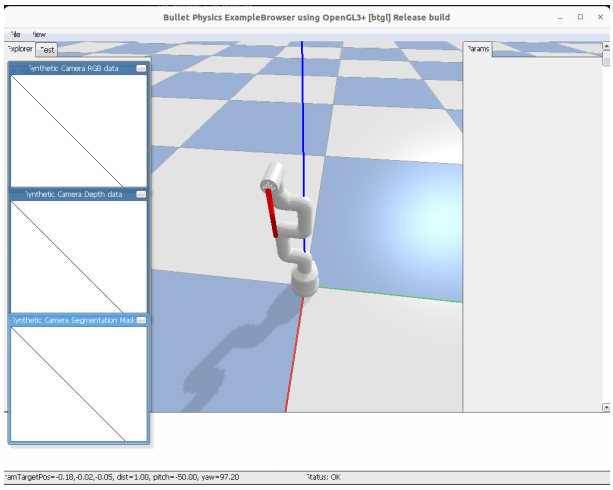


Figure 1: The pybullet simulator Graphical User Interface (GUI) that we use for the workshop.

2.1 Question 1–System Overview

Run the simulator in addition to the controller.

How many nodes are running in the system and what are their names?

Answer:

Which topics do they each publish to, and what information is included in the messages they pass back and forth? Give an example of each message in text format included in the write-up. Hint: in addition to the other tools overviewed in the CLI tutorials, the rqt_graph tool may be espically helpful to understand the system more broadly.

Answer:

2.2 Question 2–Simulator Node

The node that is responsible for running the pybullet simulation is in the ros_sim package, and the source code is in the ros_sim/pybullet_ex.py file. There are multiple timesteps used in the triggering of the simulation step including the timestep for pybullet, the timestep for the wrapper around pybullet and the ROS2 callback timer.

What function is responsible for stepping the simulation and propogating dynamics, and what timestep does it use for the simulation?

Answer:

What are the tradeoffs involved in changing the timestep used for the Pybullet simulation to something very large (a second), compared to something very small (a thousandth of a second)?

Answer:

One critical choice is in the modelling of the robot's motion. Using commands in the README, bring up the pybullet simulator and publish a goal for the arm. What does the motion look like? The ros_sim package uses PositionControl mode where pybullet models a Proportional Derivative controller at each joint that looks at position goals and velocity, and calculates force to apply to the joint. In the reset function is an example of resetting a joint's state without using a PD controller. Change the step function to

use the joint reset for each joint instead of the PD controller (the pybullet quick start guide is helpful for function documentation `https://docs.google.com/document/d/10sXEhzFRSnvFcl3XxNGhnD4N2SedqwdAvK3dsihxVUA/edit?tab=t.0#heading=h.2ye70wns7io3`), and run the pybullet simulation and publish a goal for the arm using commands in the README.

What behavior do you notice? Which method (PD controller vs Resetting Joint State) would track a given trajectory more closely? Which method would match the real robot better?

Answer:

Revert your changes to the step function.

2.3 Question 3–Controller Node

The node that is responsible for commanding the arm is in the ros_arm_controller package, and the source code is in the ros_arm_controller/robo_controller.py file. In the README commands to run the node a simulation time parameter is used.

What is the impact of the simulation_time parameter and what would happen if the controller was running in real time while the simulator was unchanged? Hint: look at ros2 documentation on simulation time.

Answer:

3 Forward Kinematics

One fundamental problem in robotics is going from the joint angles of the robot to the position of some key frame on the robot. This section will explore this problem.

3.1 Question 1–DH Params

The robot model is in a Unified Robot Description Format (URDF) file `https://docs.ros.org/en/humble/Tutorials/Intermediate/URDF/URDF-Main.html` located in the ros_sim package under resource/robots/mycobot_280_pi/mycobot_280_pi_mod.urdf. In this lab we will to try draw patterns using a marker attached to the robot.

What is the name of the link at the tip of the pen that we wish to control?

Answer:

ROS has it's own forward kinematic algorithms, but the Denavit-Hartenberg parameters are still a useful construct [2] to model the forward kinematics of a robot arm. Figure 2 shows a kinematic diagram following the DH conventions and figure 3 shows the parameters, provided by the manufacturer [3]. However, there are two gaps. One is that we will attach a base to the robot that provides a space to clamp the robot onto the table. To circumvent these gaps in this lab we will use pybullet.

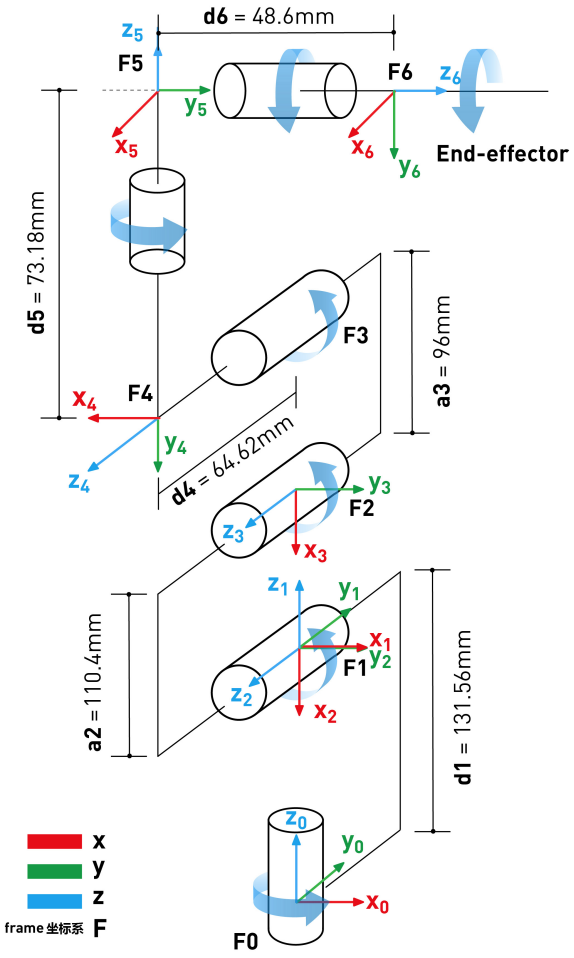


Figure 2: Kinematic diagram of the Mycobot 280 Raspberry Pi, provided by the manufacturer.

mycobot280:: 6 axis, RRRRRR, stdDH, slowRNE

j	theta	d	a	alpha	offset
1	q1	131.22	0	1.5708	0
2	q2	0	-110.4	0	-1.5708
3	q3	0	-96	0	0
4	q4	63.4	0	1.5708	-1.5708
5	q5	75.05	0	-1.5708	1.5708
6	q6	45.6	0	0	0

Figure 3: Denavit-Hartenberg parameters of the Mycobot 280 Raspberry Pi, provided by the manufacturer.

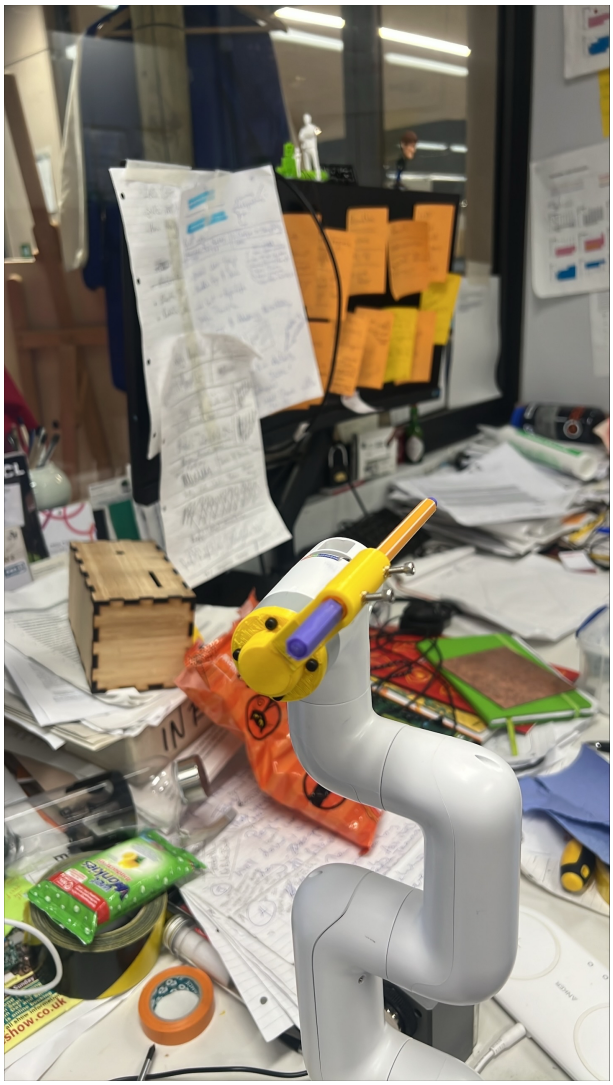


Figure 4: Mounting system as designed and fabricated by Alex Charitonidis is shown for the marker to attach to the MyCobot Robot Arm.

4 Inverse Kinematics

Another fundamental problem in robotics is going from a desired XYZ position of the robot's end effector, like a gripper trying to pick up a box at a known location, to joint angles to achieve the goal. This is inverse kinematics and in this lab we use pybullet to solve for this.

5 Trajectory Following

With the given pieces of forward kinematics and inverse kinematics, we can now design a trajectory as a series of poses (position and orientation or just position) in 3D space.

5.1 Question 1–Designing a Trajectory

The trajectory.py file inside of the ros_arm_controller package provides joint interpolation and line trajectory segment functionality. Look at the inputs to the interpolate_joint_angles function and the draw_line function.

Compare the interpolate_joint_angles function and the draw_line function. Which is computationally more expensive? Which would you use for longer moves where the position of the end effector isn't crucial. Which would you use for shorter moves where the position of the end effector is critical?

Answer:

Decide on a goal shape like a first letter from your name and populate the traj_key_segments member of the TrajectoryPlanner class using both joint interpolation and line trajectory segments. Hint: small steps between waypoints when solving IK are useful and faster to solve. Care must be taken to be inside of the workspace of the robot and to have a feasible pose (position and orientation). It is recommended to start slow with easier short trajectories and build from them.

Run your trajectory, tuning parameters for the IK solve.

Describe your planned trajectory including its shape, starting point and ending point. Include the graphs generated by robo_controller.py of the planned and actual trajectories. How long did the solve take? How much error do you have in the actual trajectory?

Answer:

6 Real Robot

We now will mimick this work on the Mycobot 280 Raspberry Pi. Follow the instructions in the README to run your work on the real robot. Tuning of parameters may be needed.

Include a picture of the real robot following your trajectory as well as the actual trajectory and planned trajectory generated by robo_controller.py. How much error does the real robot have? How does this compare to the simualated robot, and what are some of the changes needed to get this running on the real robot?

Answer:

By running the same trajectory multiple times, you can get an idea of repeatability of the robot and how closely it mimicks prior actions.

How does the real robot perform on repeatability, in comparison to the simulated robot?

Answer:

7 Moveit 2

In industry, while it is critical to understand forward and inverse kinematics (and implementing algorithms is a great way to build understanding), it is rare for practioners to implement forward kinematic or inverse kinematics themselves. This is because it takes time that practioners may prefer to spend on their value-add–most businesses do not try to add value by solving FK and IK themselves, as an example they may sell a pool-cleaning robot and may prefer to focus on making the robot resistant to water or path-planning in a pool. Additionally, re-coding the wheel risks introducing errors. Practioners most often use a library that implements these kinematic algorithms, with some exceptions in special circumstances. Figure 5 shows Moveit2, a popular library for working with robot arms.

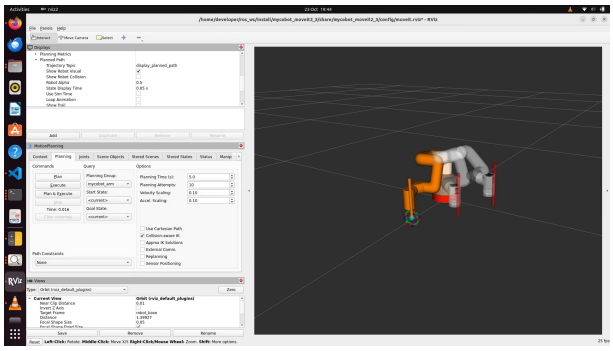


Figure 5: Screenshot of RVIZ2 while using Moveit 2 to control the mycobot arm, with no self-written code.

Follow the instructions in the README to get the arm moving. Experiment with trajectories using collision aware IK and comparing to IK without collision awareness.

How is the experience using moveit2? If you had to do another trajectory for a different letter in the English alphabet, with your current knowledge of moveit2, how much time and effort would it take to do this using moveit2 in comparison to using the code you've written in the above sections? What about once you have worked with moveit2 for some time?

Answer:

References

[1] E. Coumans and Y. Bai, "Pybullet, a python module for physics simulation for games, robotics and machine learning," 2016.

[2] J. Denavit and R. S. Hartenberg, "A kinematic notation for lower-pair mechanisms based on matrices," 1955.

[3] E. Robotics. (2020) Introduction of product parameters. [Online]. Available: https://docs.elephantrobotics.com/docs/gitbook-en/2-serialproduct/2.1-280/2.1.2.1%20Introduction%20of%20product%20parameters.html

[4] W. A. Wolovich and H. Elliott, "A computational technique for inverse kinematics," in *The 23rd IEEE Conference on Decision and Control*. IEEE, 1984, pp. 1359–1363.