




(b) first-pass layout (v1 floorplan, nominal sizing)
117.2 × 62.9 μm = 7374 μm² S11 -8.90 / S22 -7.97 dB 191 mW

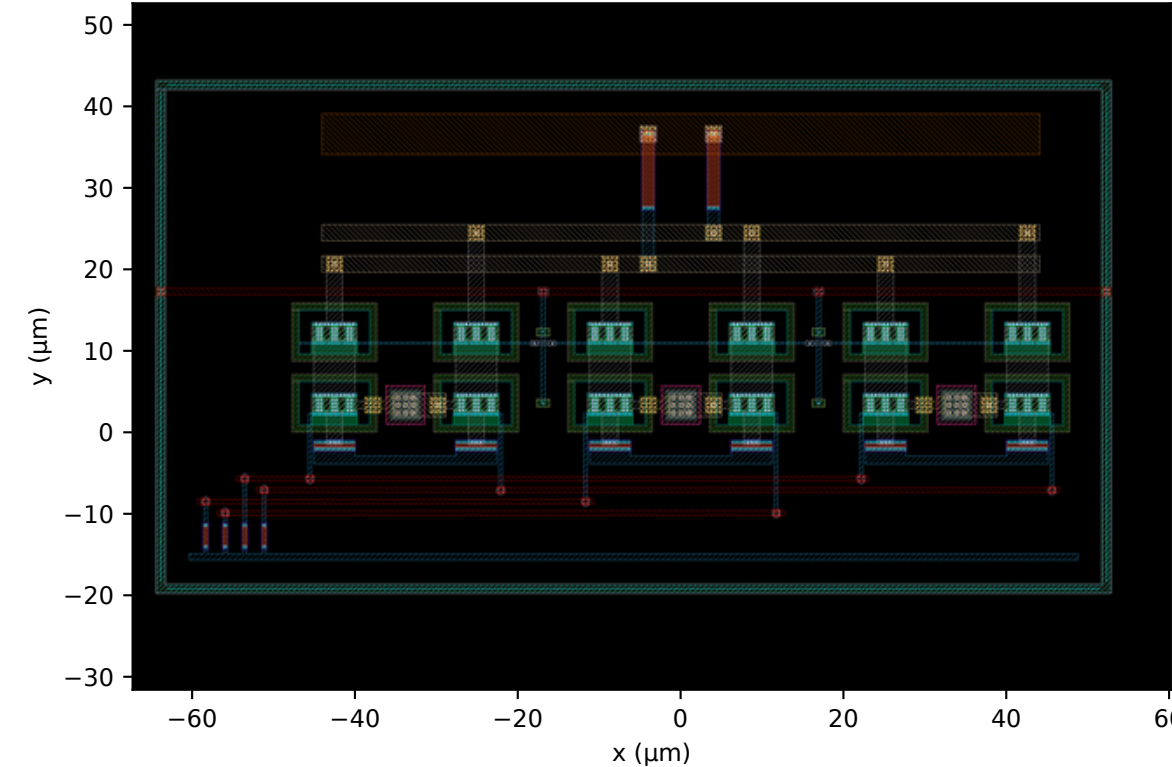


(c) layout of record v2 (block-local optimizer + RF review)
99.6 × 75.8 μm = 7552 μm² S11 -9.94 / S22 -9.24 dB 179 mW

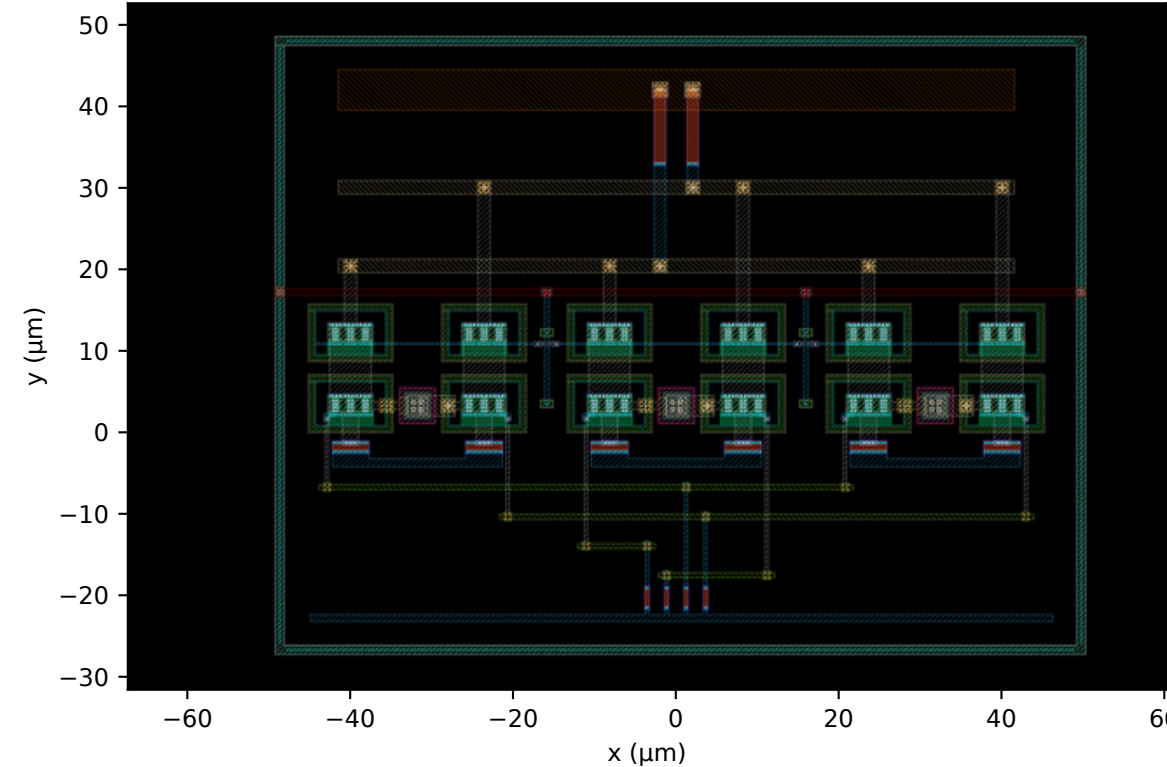

(d) co-design round 2, v3 (Alg. 1 through SpiceXplorer)
97.6 × 70.5 μm = 6880 μm² S11 -10.05 / S22 -10.72 dB 190 mW

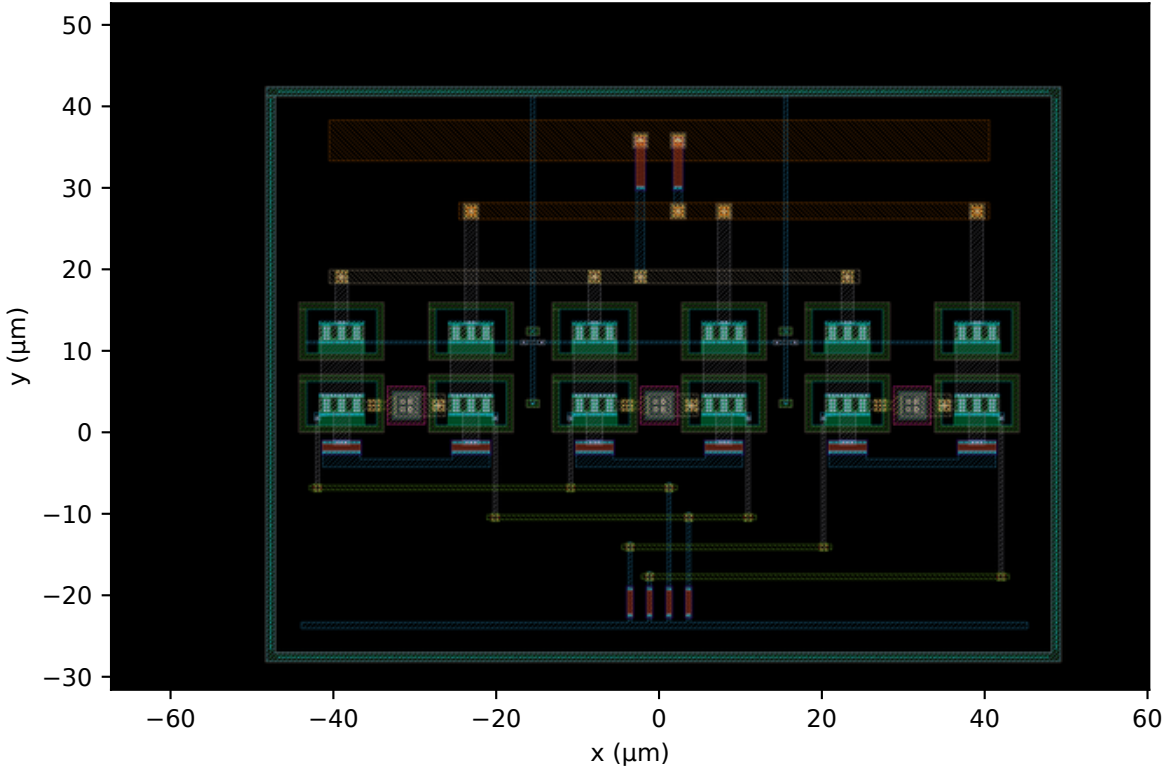

(e) co-design round 3 accepted point v4 (p/n balance objective)
102.0 × 69.2 μm = 7055 μm² S11 -10.03 / S22 -10.71 dB 185 mW

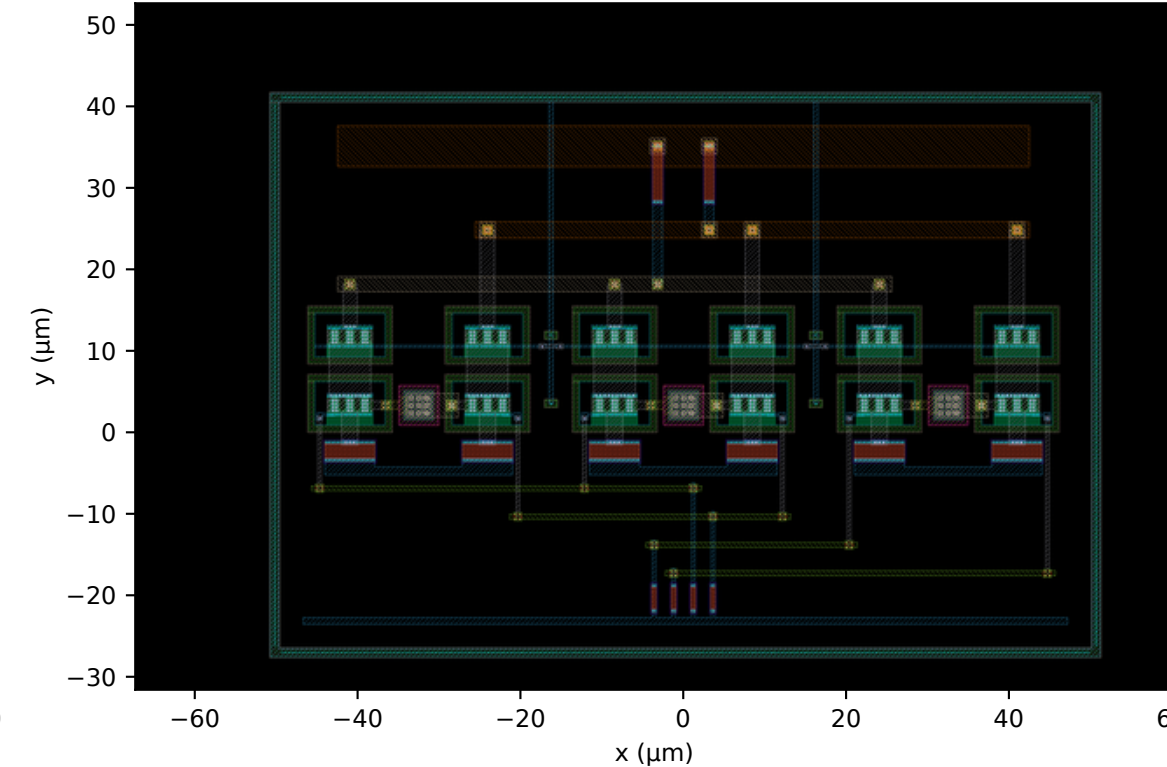

(f) co-design round 3 best-score point (r3_s12/run_26, the paper's design of record)
97.2 × 74.7 μm = 7268 μm² S11 -10.16 / S22 -10.28 dB 167 mW

