


(f) co-design round 3 best-score point (r3_s12/run_26, the paper's design of record)
 $97.2 \times 74.7 \mu\text{m} = 7268 \mu\text{m}^2$ S11 -10.16 / S22 -10.28 dB 167 mW



(g) co-design round 4 accepted point (r4_s10/run_29: reviewer-margin hinges + vcc_trim/rb_off option)
 $97.1 \times 73.8 \mu\text{m} = 7166 \mu\text{m}^2$ S11 -10.24 / S22 -10.25 dB 175 mW

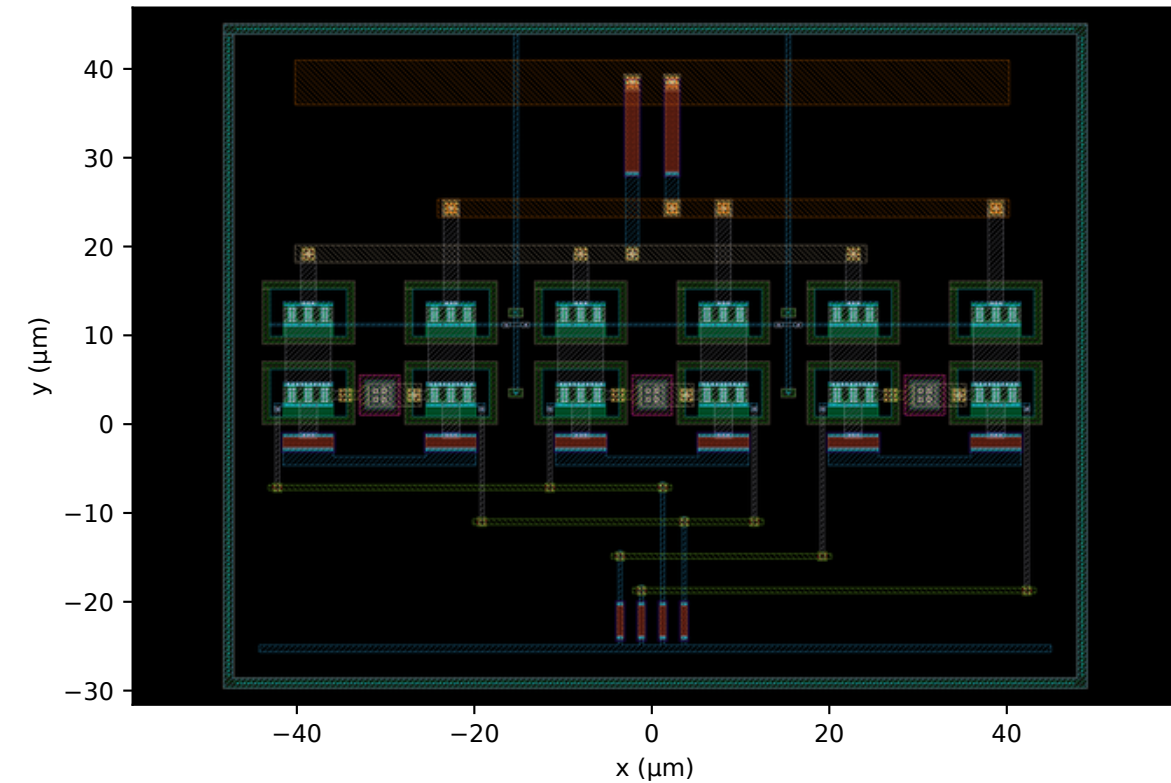