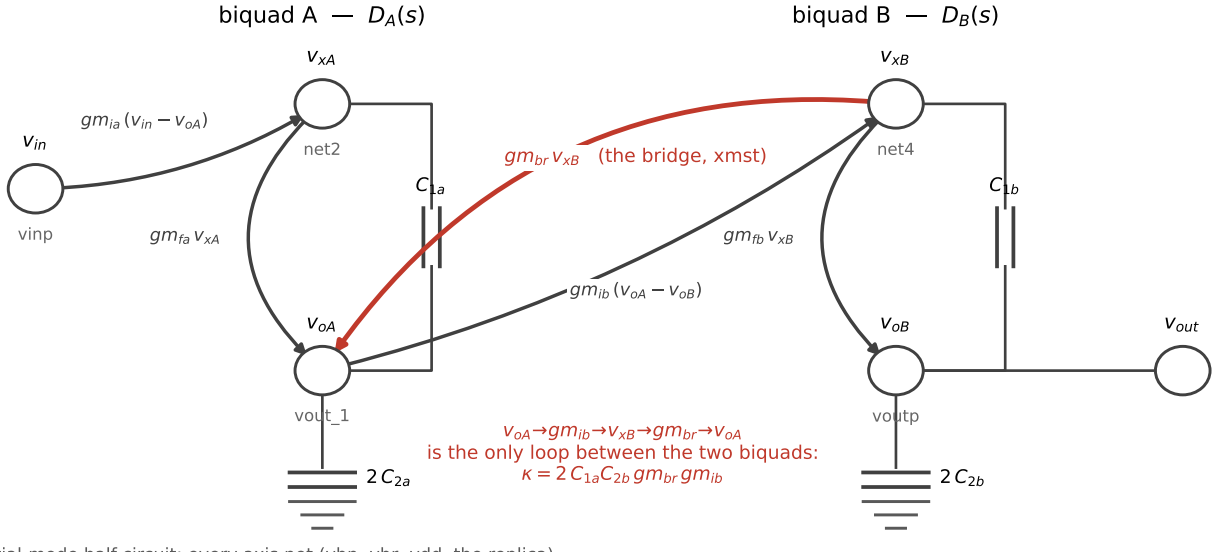


differential-mode half-circuit: every axis net (vbn, vbr, vdd, the replica)
is an ac ground, and each floating cross capacitor loads one half with $2C$.
Instance names are the certified netlist's; symbols are theory.md section 2.