



Pre- vs post-layout differential response, cell lpf_core
typical process, 27 °C, 1.5 V · cutoff 249.77 → 248.66 Hz

(a) differential magnitude — the stopband ends in a transmission zero and a feed-through floor

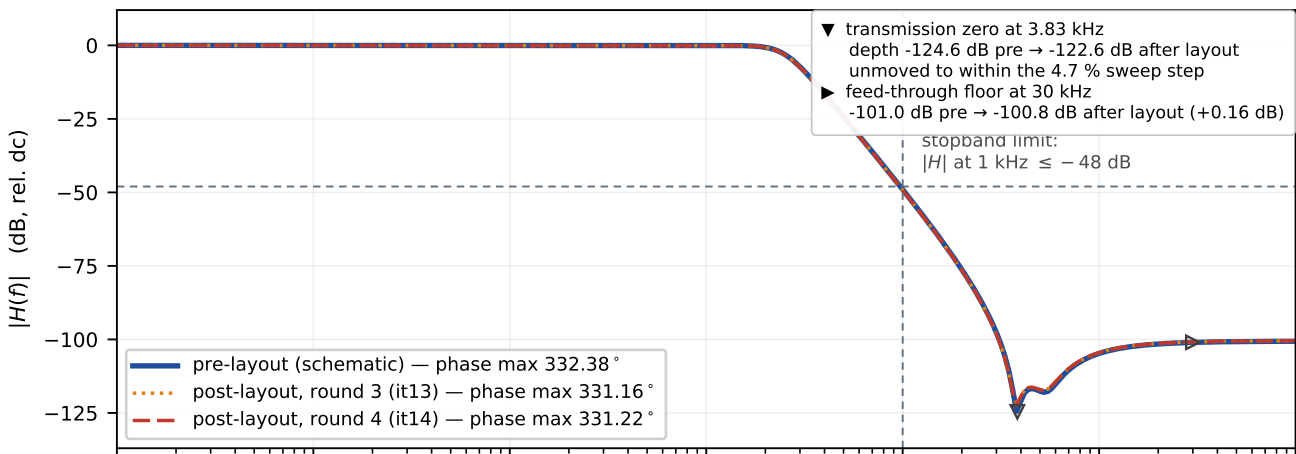

(b) unwrapped phase — the two-biquad certificate

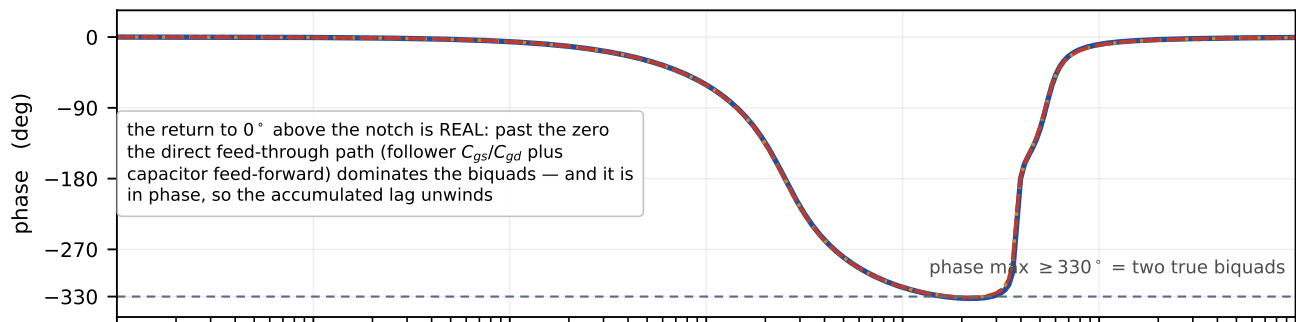

(c) after layout — before: the 3-5 kHz spike is the notch region, not a resonance

