



# MACCOR


# CELL & BATTERY Test Systems

Maximize your testing capabilities with our comprehensive turnkey systems that bundle hardware and software essentials to jumpstart your process. Select from multiple configurations tailored to your needs, then leverage fully automated, computerized testing with high-speed data acquisition and control—designed to meet both your current demands and future growth.

 **UP TO 96 CH**  
PER SYSTEM

 **2400 amp**  
CHARGE/DISCHARGE

 **+28 kW**  
MAXIMUM POWER

 **UP TO 4**  
CURRENT RANGES

## ENGINEERED FOR RESULTS




### Industry Standard

The world's most reliable battery test platform 50+ countries 1,000+ facilities, proven since 1987




### Full-Featured Software Suite

Comprehensive software suite provides real-time monitoring data analysis and management

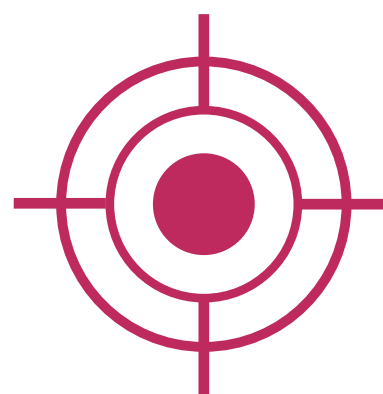

### Precision Measurement

Multiple current ranges and Maccor measurement architecture deliver reliable accuracy across diverse applications

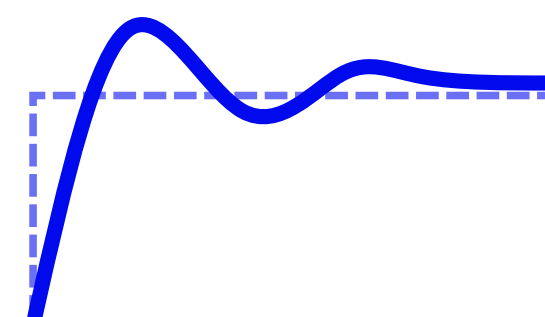


### Dynamic Step & Pulse Response

Achieve step times as low as 2 ms (or 500  $\mu$ s on 6000-series platforms) for HPPC, drive cycles, and fast electrochemical transient characterization.

## IDEAL FOR A WIDE RANGE OF APPLICATIONS




Battery  
Research



Cycle  
Life



National  
Defense

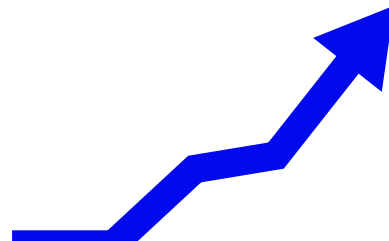

Performance  
Testing




Consumer  
Electronics



Medical  
Devices



Advanced  
Electronics



**ENGINEERED IN THE USA**  
Built with quality and reliability  
you can trust



**TOMORROW STARTS HERE**  
Seamlessly supports future  
chemistries



**GLOBAL SUPPORT**  
Expert support and service  
around the world



maccor.com



sales@maccor.com



+1 918 446-1874



Made in America

| TECHNICAL SPECIFICATIONS |                 |                 |
|--------------------------|-----------------|-----------------|
| Parameter                | 4000 / 4000H    | 6000 / 6000H    |
| Maximum Channels         | 96              | 96              |
| Maximum Current (A)      | 1,440 / 2,400   | 1,440 / 2,400   |
| Maximum Power (W)        | 14,400 / 28,800 | 14,400 / 28,800 |
| Current Ranges           | 1 or 4 / 2 or 3 | 1 or 4 / 2 or 3 |
| Minimum Step Time        | 10 ms           | 1 ms            |
| Scope Trace              | -               | 20 kHz          |
| Records per Second       | 350             | >10,000         |
| Variables                | 15              | 50              |
| Global Flags             | 32              | 64              |

| AMPL                  |            |            |
|-----------------------|------------|------------|
| Parameter             | 4000/4000H | 6000/6000H |
| Minimum Pulse width   | -          | 100 μs     |
| Pulse width increment | -          | 1 μs       |
| Data Recording        | -          | 100 μs     |

| WAVEFORMS               |            |            |
|-------------------------|------------|------------|
| Parameter               | 4000/4000H | 6000/6000H |
| Maximum Number of Steps | Unlimited  | Unlimited  |
| Minimum Step Width      | 50 ms      | 1 ms       |
| Data Recording          | 50 ms      | 1 ms       |



## ENHANCE YOUR TESTIING

- Auxiliary Voltage
- Temperature
- Pressure
- SMBus (I<sup>2</sup>C)
- Cell Holders

- Digital I/O
- CAN
- AC Impedance Multiplexer
- External Charge or Discharge Controller
- Interface Cables

## EXPANDABLE TESTING, BUILT FOR GROWTH

Start with as few as eight test channels and expand your system right in your facility as your testing demands and budget grow. Add channels to the same tester in the field with minimal disruption eliminating the costly delays and logistical burden of shipping your tester back to the factory for upgrades. Scale seamlessly as you need to.