
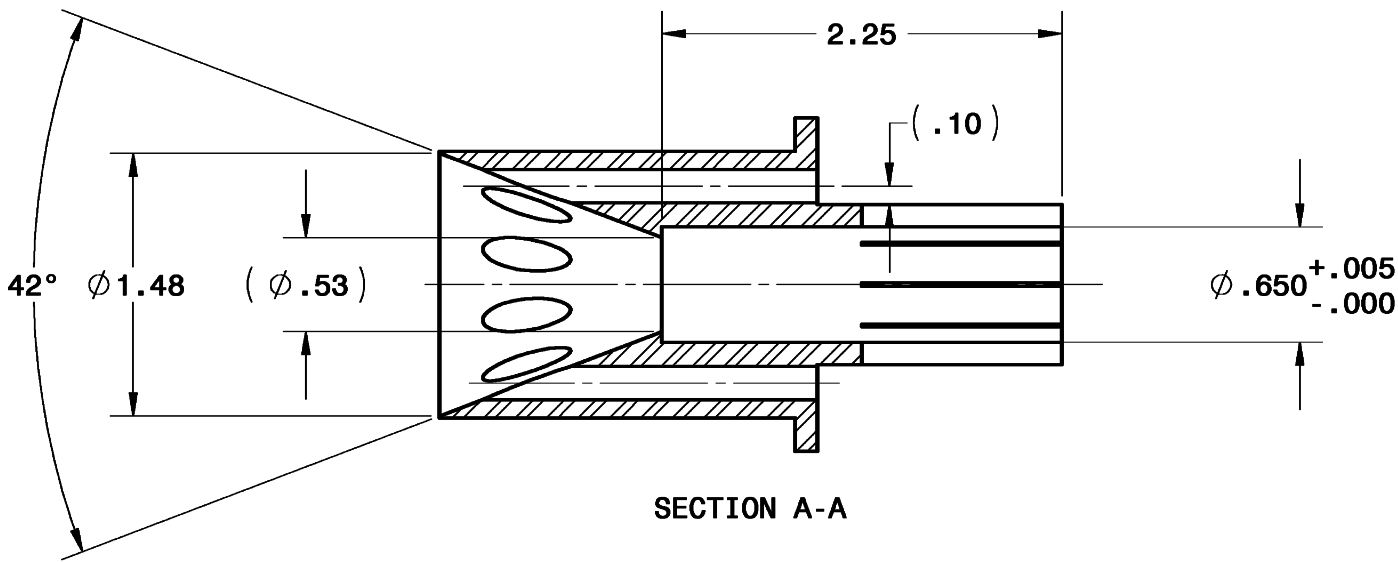
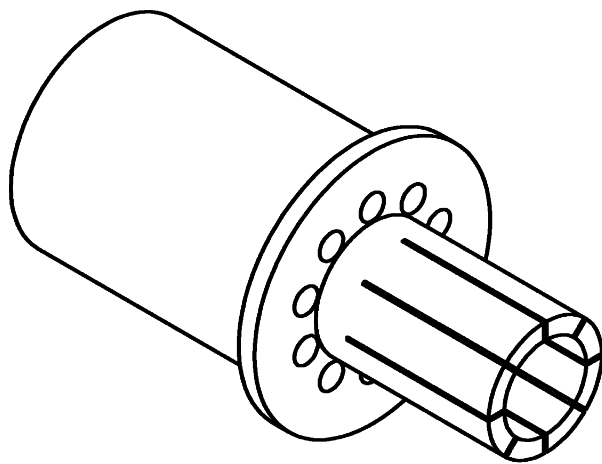
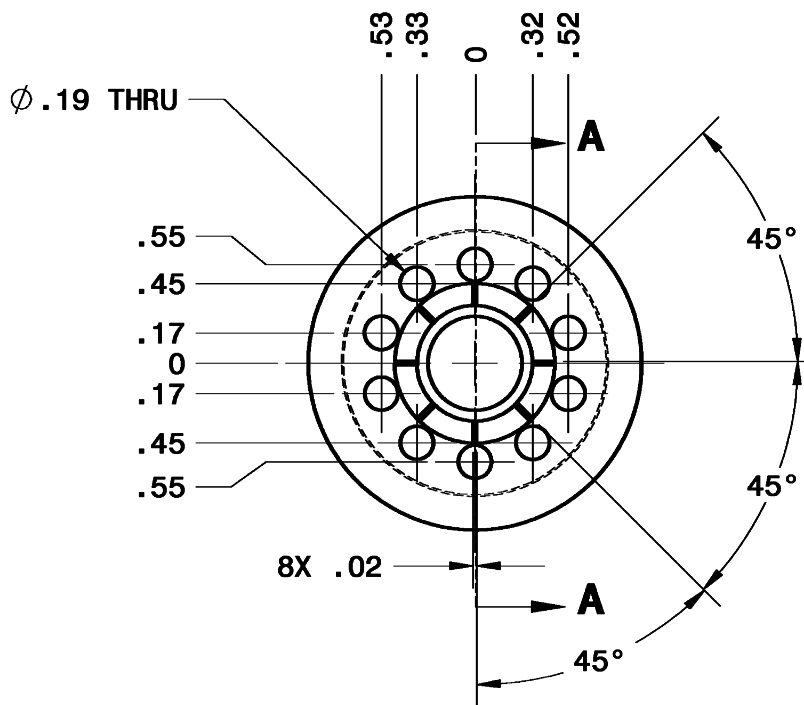


REV.	REVISION	DWG. BY	DATE
A	REVISED NOTES	VZEKANY	8/16/2010
B	JOB DESCRIPTION CHANGE. PROJECT QUANTITY CHANGED FROM 3 TO 1.	JASHWORTH	7/27/2010

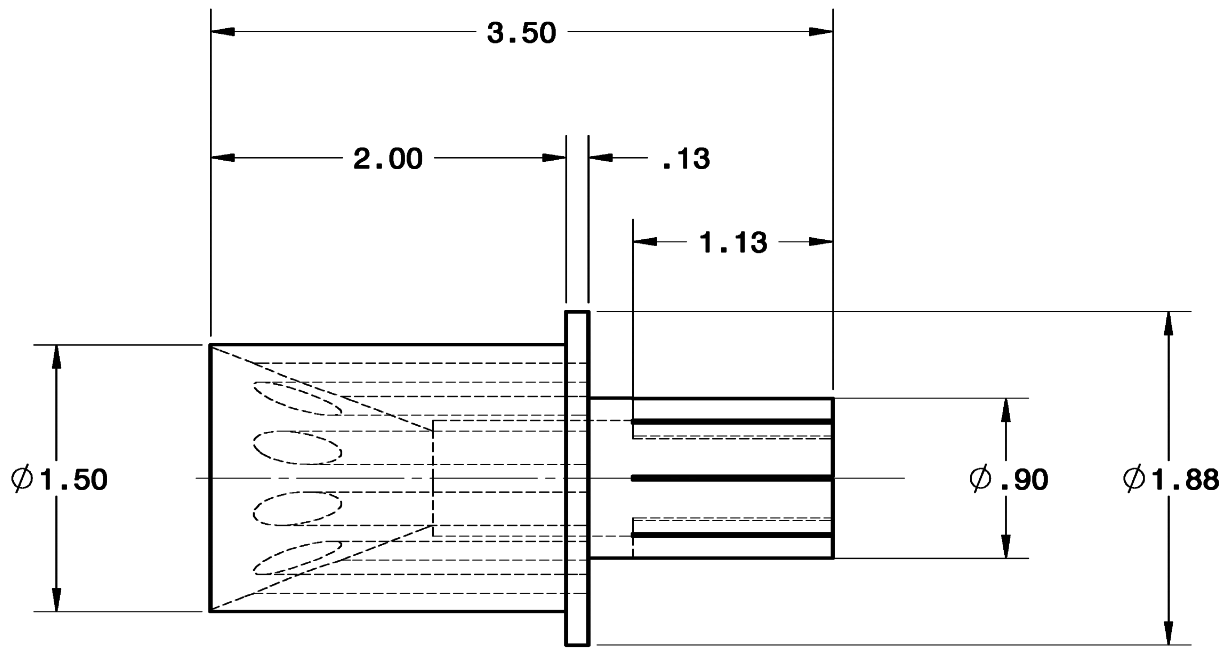

☐ ACCEPTED AS NOTED ☒ ACCEPTED ☐ NOT ACCEPTED		
Signature	Representing	Date
J. Egan	gen	2010.09.17
The use and meaning of "ACCEPTED" is governed by the terms and conditions of the P.O. AECL Ref. No: 87630-223000 and in any event the user does not relieve the supplier of any of its obligations to AECL and/or its Client.		

ASSIGNED AECL NUMBER
RT-87630-71254-1001-1-DD-D Rev.1

- NOTES:
1. FINISH: HARD ANODIZE TO AMS 2469, .0002" TO .0005" THICK. CERTIFICATE OF COMPLIANCE REQUIRED.
 2. DIMENSIONAL REPORT REQUIRED FOR CRITICAL CHARACTERISTICS

Material 6061-T6 ALUMINUM	Finish HARD ANODIZE (C OF C)	Heat Treat NONE	QTY. 15	TOTAL 15
Drawn By R.M. ROWE	AUTOMATION TOOLING SYSTEMS INC. 250 ROYAL OAK ROAD, CAMBRIDGE, ONT. N3H 5M2			
Date Sep 16, 2009	ATOMIC ENERGY OF CANADA VRS RETRIEVAL TOOLS IPEX .5 BUSHING			
Unless Otherwise Specified Machining Tolerances Holes > .25" .001 ± .002 Holes < .25" .002 ± .003 Weldment/Fabrication Tolerances Flatness (1" or less) 0 - 12 ± .000 Length (inches) >12 - 36 ± .001 Flatness (inches) 0 - 12 ± .001 Length (inches) >12 - 36 ± .002 Unless Otherwise Specified Dimensions Apply After Finish Break All Sharp Corners to Min .005, Max .015 Do not Machine Stock Sizes All Machined Surfaces to be 16/32 (Ra) or Better	Drawing No. D-12995-1254-0001		Rev. B	
Do Not Scale Drawing Dimensions are in inches	Scale 1:1	Job No.	Sheet 1	of 1