LET.	REVISION	DRN. BY	DATE
A	JOB DESCRIPTION CHANGE. PROJECT QUANTITY CHANGED FROM 3 TO 1.	JASHWORTH	7/27/2010

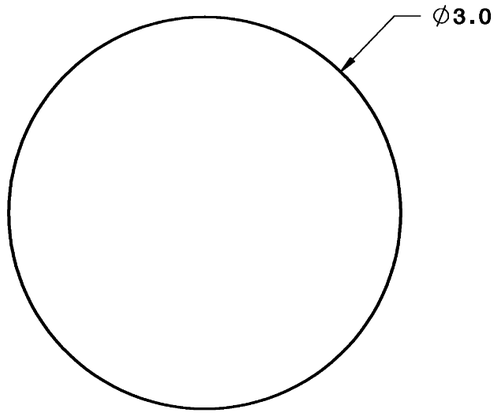

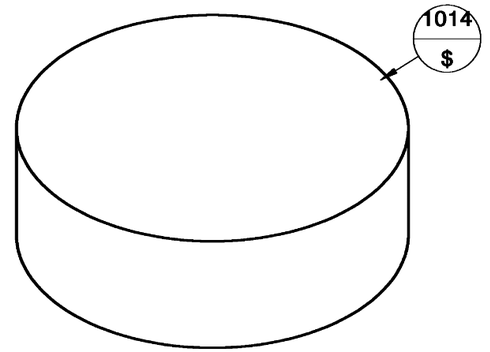

BOM on Drawing For Reference Only

ITM	QTY	DESCRIPTION	MFR
1014	1	POLYURETHANE FOAM, SHEET 1" X 24" X 24", LEVEL 3 FIRMNESS RA...	8643K727 MCMASTER-CARR

Material	Finish	Heat Treat	QTY.	TOTAL
USE ITEM #1014	NONE	NONE	50	50

Drawn By
R.M.ROWE
Date
Sep 16, 2009

Unless Otherwise Specified

Machining Tolerances .000 ± .005; .00 ± .010; Angle ± .5° .0 ± .030

Weldment/Fabrication Tolerances

Mat'l Thickness (1" or less)	0 - 12	± .030
	>12 - 36	± .060
Length (inches)	>36 - 80	± .125
Mat'l Thickness (> 1")	0 - 12	± .060
	>12 - 36	± .125
Length (inches)	>36 - 80	± .250

Unless Otherwise Specified
-Dimensions Apply After Finish
-Break All Sharp Corners to Min .005, Max .015
-Do not Machine Stock Sizes
-All Machined Surfaces to be 125 √ (Ra) or better

3rd Angle Projection
-Do Not Scale Drawing
-Dimensions are in inches

DDM-S-IN-B.slddrt Rev. - North America

AUTOMATION TOOLING SYSTEMS INC.
250 ROYAL OAK ROAD, CAMBRIDGE, ONT. N3H 5M2

ATOMIC ENERGY OF CANADA
VRS
RETRIEVAL TOOLS
SPONGE DISC

Drawing No. B-12995-1254-0008
Rev. A

Scale 1:1
Job No.
Sheet 1 of 1

Plot Date: JUL 29 2010 Agnes Roy

AECL EACL

☐ ACCEPTED AS NOTED ☒ ACCEPTED ☐ NOT ACCEPTED

Signature	Representing	Date
J. Enns	gen	2010.09.17

"The use and meaning of "ACCEPTED" is governed by the terms and conditions of the P.O. AECL Ref. No: 87630-223000 and in any event its use does not relieve the supplier of any of its obligations to AECL and/or its Client."

ASSIGNED AECL NUMBER
RT-87630-71254-1008-1-DD-B Rev.1

PDF Conversion Date: 2010/09/21-09:30:7