
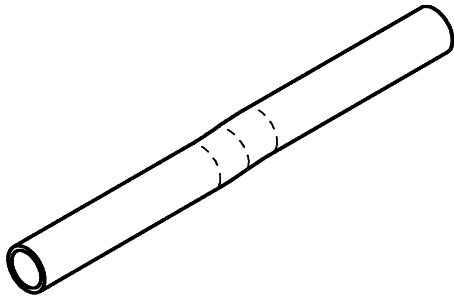



LET.	REVISION	DRN. BY	DATE
A	THIS PART WAS "VACUUM NOZZLE HOSE ADAPTER" WHICH IS NOW OBSOLETE.	JASHWORTH	7/14/2010
B	JOB DESCRIPTION CHANGE. PROJECT QUANTITY CHANGED FROM 3 TO 1.	JASHWORTH	7/27/2010



☐ ACCEPTED AS NOTED ☒ ACCEPTED ☐ NOT ACCEPTED		
Signature	Representing	Date
J. Enns	gen	2010.09.17
"The use and meaning of "ACCEPTED" is governed by the terms and conditions of the P.O. AECL Ref. No: 87630-223000 and in any event its use does not relieve the supplier of any of its obligations to AECL and/or its client."		

ASSIGNED AECL NUMBER
RT-87630-71254-1025-1-DD-B Rev.0

MAKE FROM ITEM 1009 POLYURETHANE FLEX TUBING.
CUT TO REQUIRED LENGTH OF APPROX 14" AT ASSY

Material USE ITEM #1009		Finish NONE	Heat Treat NONE	QTY. 1	TOTAL 1
Drawn By JAMES ASHWORTH		AUTOMATION TOOLING SYSTEMS INC. 250 ROYAL OAK ROAD, CAMBRIDGE, ONT. N3H 5M2			
Date JUL 14 2010					
Unless Otherwise Specified Machining Tolerances .000 ± .005 .00 ± .010 .0 ± .030 Angle ± .5° Weldment/Fabrication Tolerances Mat'l Thickness 0 - 12 ± .030 (1" or less) >12 - 36 ± .060 Length (inches) >36 - 80 ± .125 Mat'l Thickness 0 - 12 ± .060 (> 1") >12 - 36 ± .125 Length (inches) >36 - 80 ± .250		ATOMIC ENERGY OF CANADA VRS RETRIEVAL TOOLS FLEX TUBE-FILTER TO REDUCER			
Unless Otherwise Specified -Dimensions Apply After Finish -Break All Sharp Corners to Min .005, Max .015 -Do not Machine Stock Sizes -All Machined Surfaces to be 125/ (Ra) or better		Drawing No. B-12995-1254-0025			Rev. B
	-Do Not Scale Drawing -Dimensions are in inches	Scale 1:2	Job No.	Sheet 1	of 1

DDW-3-IN-B.sldprt Rev. - North America

Plot Date: JUL 29 2010 Agnes Roy