



Crimp Specification

Parflex Division

donderdag, september 10, 2026

*All units in millimeters


English ▼

Crimper:	Hose Style:	Coupling Style:	Hose	Non Conductive Hose
Adjustable	518D	56	Description	Meets or exceeds SAE 100R7

Size	Crimper Die	Crimp Diameter	Crimp Length	Approx Setting	Hose Insertion	Drawing
Standard Straight Dies						
-2	8mm / 10mm	10.24	13.59	-	16	VHY
-3	10mm / 12mm	12.45	FULL	-	16	VFull
-4	12mm / 13mm	13.84	FULL	-	24	VFull
-5	12mm / 14mm	16.00	FULL	-	26	VFull
-6	14mm / 16mm	17.40	FULL	-	25	VFull
-8	20mm / 21mm	21.59	FULL	-	28	VFull
-10	23mm / 25mm	25.65	FULL	-	31	VFull
-12	23mm / 25mm	28.19	FULL	-	34	VFull
-16	32mm / 34mm	34.42	FULL	-	49	VFull

Comments
PFD: Crimp diameter is measured at a minimum of three places, 45 degrees apart, at the top, then middle and bottom of the crimp.
PFD: Pertains to steel & stainless steel fittings. Refer to Parflex Catalog 4660 for hose assembly instructions. (www.parker.com/parflex).
PFD: Crimp diameter tolerance on all Adjustable Crimpers is $\pm 0.005"$ ($\pm 0.13\text{mm}$). Crimp length tolerance is $\pm 0.030"$ ($\pm 0.76\text{mm}$).
PFD: Crimp diameter tolerance for size -2 hose is $\pm 0.007"$ ($\pm 0.18\text{mm}$). Crimp length tolerance is $\pm 0.030"$ ($\pm 0.76\text{mm}$).
PFD: Align measurement caliper or micrometer on the center of crimp impressions avoiding the crimp ribs.
PFD: Crimp acceptance is based on the middle measurement average with a maximum taper of 0.010" (0.25 mm) between the top and bottom crimp averages.
PFD: Reference Parker Fluid Connector Group (FCG) Safety Bulletin 4400-B.1 (www.parker.com/safety)
PFD: inspect insertion depth mark at fitting ends. Insertion mark must be visible but not exceed 1/8" from end of crimped fitting shell

VHY

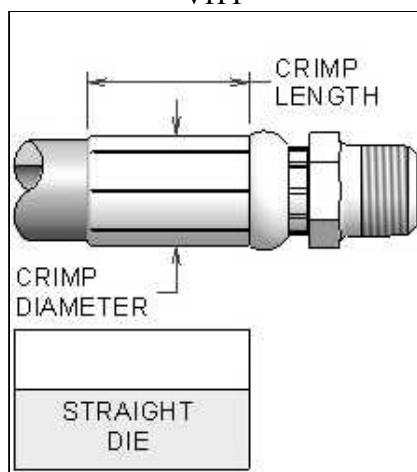

VFull

