

(10) **Patent No.:** US 11,102,578 B1  
(45) **Date of Patent:** Aug. 24, 2021

- USPC ..... 381/17, 309, 310  
See application file for complete search history.

- (56)
- References Cited**

- U.S. PATENT DOCUMENTS

- 6,961,439 B2 11/2005 Ballas  
9,584,653 B1\* 2/2017 Lyren ..... H04S 7/304  
(Continued)

- ## OTHER PUBLICATIONS

- Aki Ha Rma—Augmented Reality Audio for Mobile and Wearable Appliances; J. Audio Eng. Soc. vol. 52, No. 6; 2004; 22 Pages.

- (Continued)

### Related U.S. Application Data

- Primary Examiner — Vivian C Chin  
Assistant Examiner — Friedrich Fahnert

- (74) *Attorney, Agent, or Firm* — Womble Bond Dickinson  
(US) LLP

(57) **ABSTRACT**


(Continued)

- (52) U.S. Cl.

CPC ..... ***H04R 3/12*** (2013.01); ***G06F 3/0482***  
(2013.01); ***G06F 3/04817*** (2013.01); ***G06T***  
***13/00*** (2013.01); ***H04R 5/02*** (2013.01); ***H04R***  
***5/033*** (2013.01); ***H04R 5/04*** (2013.01); ***H04S***  
***1/002*** (2013.01); ***H04S 7/304*** (2013.01); ***H04S***  
***2420/01*** (2013.01)

- (58) **Field of Classification Search**

CPC . H04R 3/12; H04R 5/02; H04R 5/033; H04R  
5/04; G06F 3/04817; G06F 3/0482; G06T  
13/00; H04S 1/002; H04S 7/304; H04S  
2420/01

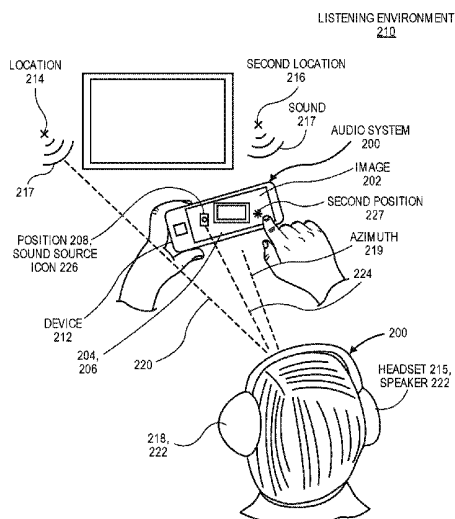

- (51) **Int. Cl.**  
**G06F 3/0481** (2013.01)  
**H04S 7/00** (2006.01)

(56) **References Cited**


U.S. PATENT DOCUMENTS


9,794,722	B2	10/2017	Petrov	
2015/0156599	A1	6/2015	Romigh	
2019/0052986	A1 *	2/2019	Lee .....	H04S 1/002
2019/0116452	A1 *	4/2019	Shi .....	G06F 3/167
2020/0077222	A1 *	3/2020	Nguyen .....	H04R 5/033


OTHER PUBLICATIONS

Tapio Lokki—Subjective Evaluation of Auralization of Physics-Based Room Acoustics Modeling; Proceedings of the 2001 International Conference on Auditory Display, Espoo, Finland, Jul. 29-Aug. 1, 2001; 6 Pages.


\* cited by examiner

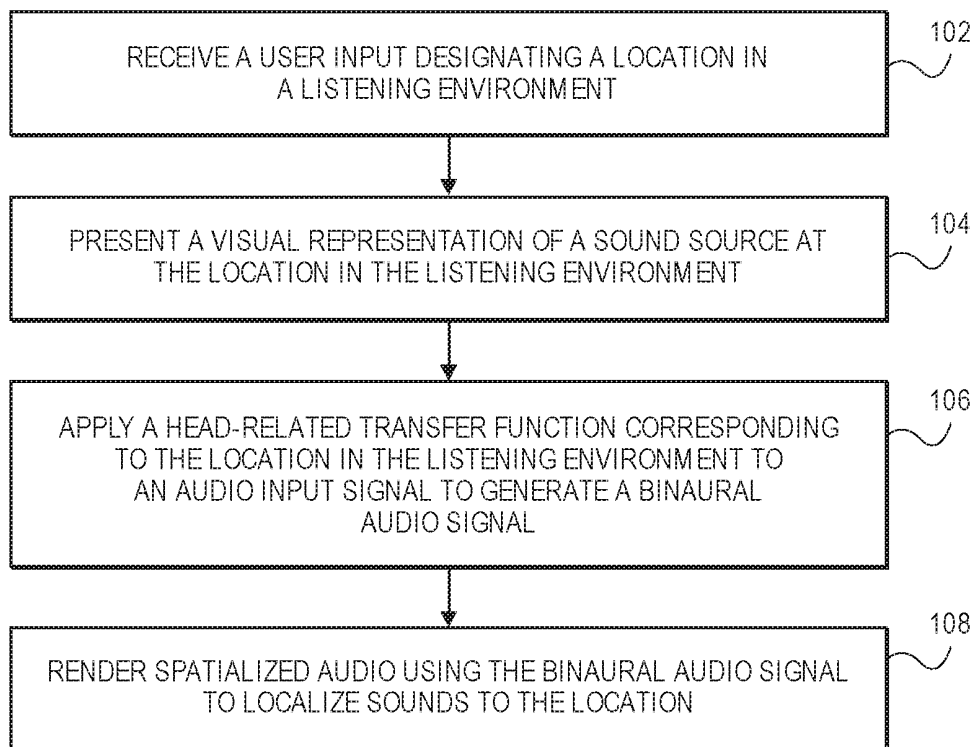**FIG. 1**

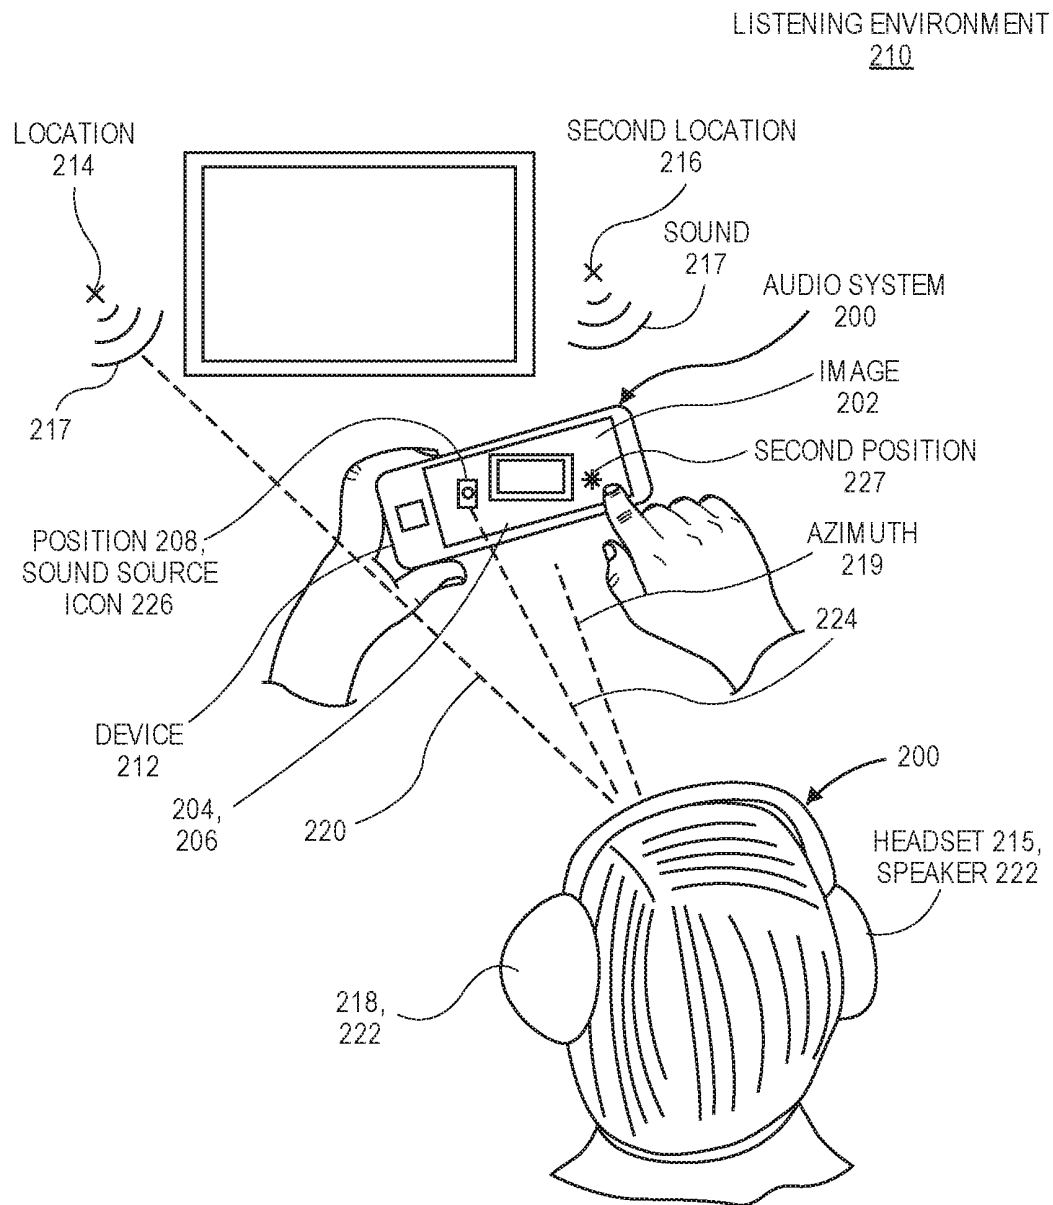**FIG. 2**

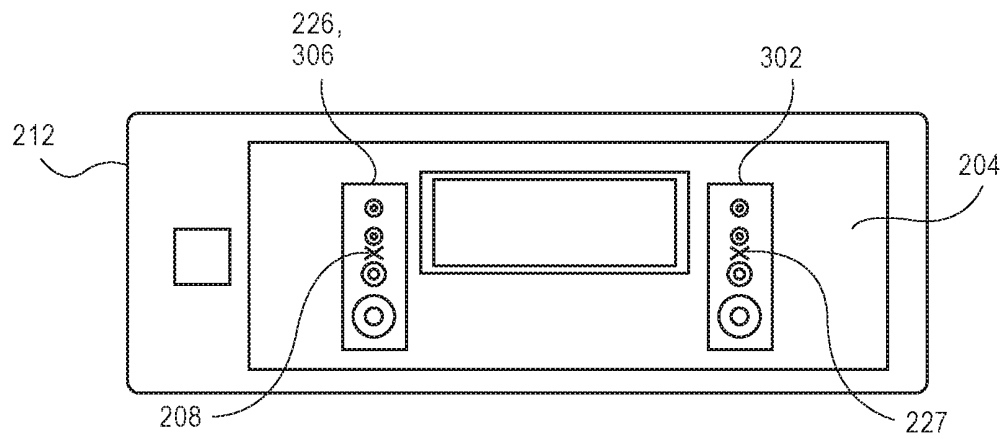

**FIG. 3**

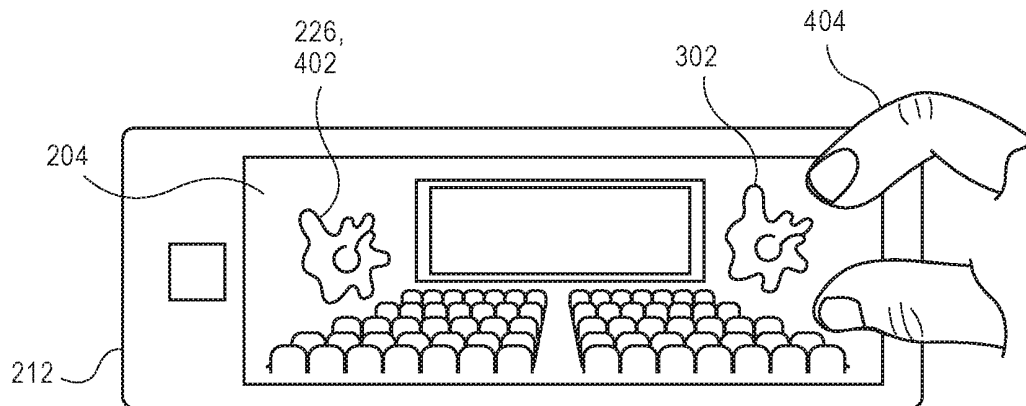

**FIG. 4**

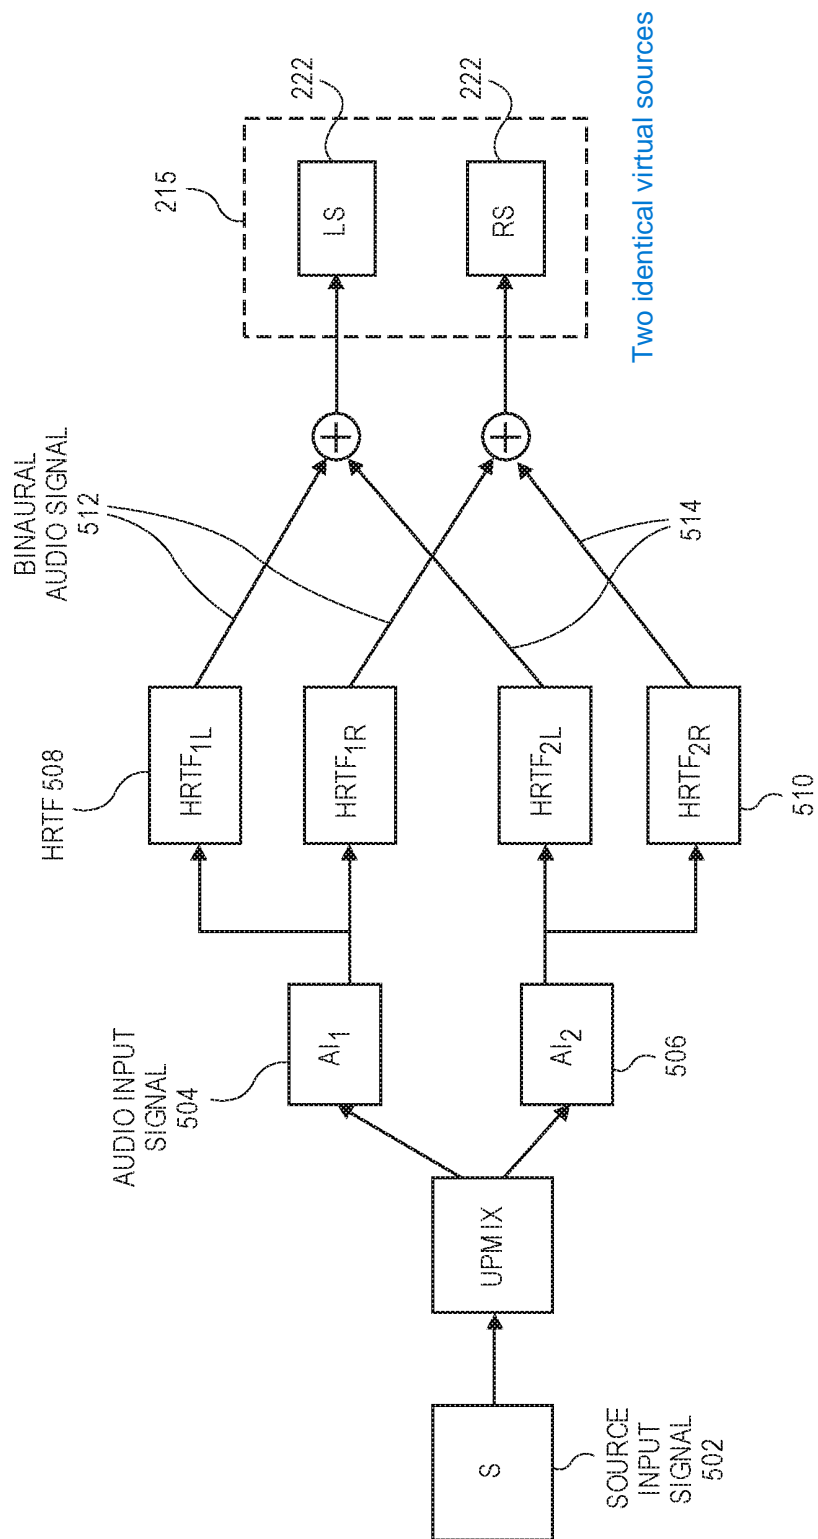


FIG. 5

1

## AUDIO SYSTEM AND METHOD OF AUGMENTING SPATIAL AUDIO RENDITION

This application claims the benefit of priority of U.S. Provisional Patent Application No. 62/737,658, filed on Sep. 27, 2018 and incorporates herein by reference that provisional patent application.

### BACKGROUND

#### Field

Aspects related to audio systems are disclosed. More particularly, aspects related to audio systems used to render spatial audio are disclosed.

#### Background Information

Headphones typically play music by rendering a stereo audio image that is perceived by the listener as internalized sound coming from within the listener's head. Headphones can also be used to render spatial audio to create a more natural experience, e.g., to simulate externalized sound coming from a location outside of the listener's head. An effective spatial sound reproduction is perceived just as the user would experience the sounds in the real world. Creating such a spatial sound reproduction, however, is a challenging and ongoing endeavor.

### SUMMARY

The factors contributing to effective spatial audio rendition (accurate head-related transfer functions (HRTF)s, environment-related transfer functions (ERTF)s, and head tracking) are difficult to achieve and integrate, and have not been perfected. For example, personalizing HRTFs to individual listeners involves complex measurements of the interaction between multi-spectral audio and the listener anatomy, and has only been performed well under strict laboratory controls. Similarly, although good approximations of ERTFs and head tracking can be achieved using existing technologies, the approximations are imperfect and can accumulate into a total error that undermines the spatial audio illusion. More particularly, inaccuracies in one or more of the HRTFs, ERTFs, or head tracking information can cause the illusion to collapse, quite literally, such that the audio that is initially perceived as externalized sound outside of the listener's head moves inward and becomes perceived as internalized sound within the listener's head.

An audio system and methods of using the audio system to augment spatial audio rendition are described. In addition to implementing HRTF, ERTF, and head tracking algorithms to render spatial audio, the audio system provides a visual reference associated with the spatial audio. The visual reference can be a sound source icon displayed in an augmented reality view at a position corresponding to a virtual sound location in a listening environment. The visual reference augments the spatial audio rendition by causing a listener to perceive the virtual sound as coming from the location even when the listener stops looking at the augmented reality view. It is hypothesized that the visual representation of the virtual sound source, when viewed on a display of the audio system, convinces the listener's brain to reference the spatial audio to the location in the actual listening environment that corresponds to the position of the icon on the display. This psychoacoustic effect, which is predicated on viewing the visual cue (even if only tempo-

2

rarily) can make the spatial audio experience more durable. More particularly, the experience can last longer before the illusion collapses. The psychoacoustic effect works even when the HRTF, ERTF, and head tracking information is imperfect.

In an aspect, the audio system includes an input device configured to receive a user input designating positions on a displayed image of a listening environment, e.g., in an augmented reality view of the listening environment. In response to the user designations, a display of the audio system overlays sound source icons, which are visual representations of sound sources, on the image at the designated positions on the display. The sound sources can be virtual sound sources at locations within the actual (not the augmented reality view of) listening environment. For example, a sound source icon can be a three-dimensional visual model of a loudspeaker rendered at a right speaker location in the actual listening environment. One or more processors of the audio system can apply HRTFs to audio input signals corresponding to the virtual sound sources. For example, the processor(s) can apply an HRTF to the audio input signal for the right speaker (e.g., a right channel) to generate a binaural audio signal that represents sounds coming from the right speaker location. The audio system can render, through one or more speakers, spatialized audio using the binaural audio signal to localize sound to the locations in the actual listening environment. For example, a headset can play the binaural audio signal to create the illusion that there is a right speaker generating sounds from the right speaker location external to the user's head. The user may discontinue presentation of the image on the display, e.g., by setting the phone down, and the headset can continue rendition of the spatialized audio. Despite the lack of a continued visual aid, the user may continue to perceive the localized sounds as coming from the locations in the actual listening environment because the previously presented visual cues can calibrate the mind of the user to believe that the virtual sound sources are actually at those locations. Accordingly, the psychoacoustic effect of presenting visual cues associated with a spatial audio rendition is a more durable spatial audio experience.

The above summary does not include an exhaustive list of all aspects of the present invention. It is contemplated that the invention includes all systems and methods that can be practiced from all suitable combinations of the various aspects summarized above, as well as those disclosed in the Detailed Description below and particularly pointed out in the claims filed with the application. Such combinations have particular advantages not specifically recited in the above summary.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a flowchart of a method of augmenting spatial audio rendition, in accordance with an aspect.

FIG. 2 is a pictorial view of a user handling an audio system, in accordance with an aspect.

FIG. 3 is a pictorial view of a sound source icon overlaid on one or more images of an actual listening environment, in accordance with an aspect.

FIG. 4 is a pictorial view of a sound source icon overlaid on one or more images of a simulated listening environment, in accordance with an aspect.

FIG. 5 is a schematic view of spatial audio processing by an audio system, in accordance with an aspect.

### DETAILED DESCRIPTION

Aspects describe an audio system and method of using the audio system to augment spatial audio rendition. The audio

system can include a device and a headset. In an aspect, the device can be a smartphone and the headset can be circum-aural headphones. The headset can include other types of headphones, such as earbuds or supra-aural headphones, to name only a few possible applications. In other aspects, the device can be another device for rendering media including audio to a user, such as a tablet, a desktop computer, a laptop computer, an augmented reality/virtual reality headset, etc. In other aspects, the device and headset can be integrated into a single device.

In various aspects, description is made with reference to the figures. However, certain aspects may be practiced without one or more of these specific details, or in combination with other known methods and configurations. In the following description, numerous specific details are set forth, such as specific configurations, dimensions, and processes, in order to provide a thorough understanding of the aspects. In other instances, well-known processes and manufacturing techniques have not been described in particular detail in order to not unnecessarily obscure the description. Reference throughout this specification to “one aspect,” “an aspect,” or the like, means that a particular feature, structure, configuration, or characteristic described is included in at least one aspect. Thus, the appearance of the phrase “one aspect,” “an aspect,” or the like, in various places throughout this specification are not necessarily referring to the same aspect. Furthermore, the particular features, structures, configurations, or characteristics may be combined in any suitable manner in one or more aspects.

The use of relative terms throughout the description may denote a relative position or direction. For example, “in front of” may indicate a location in a first direction away from a reference point. Similarly, “behind” may indicate a location in a second direction away from the reference point and opposite to the first direction. Such terms are provided to establish relative frames of reference, however, and are not intended to limit the use or orientation of an audio system or components thereof to a specific configuration described in the various aspects below.

Several components contribute to an effective spatial sound rendition that creates the illusion of an externalized virtual sound source. First, an accurate head-related transfer function (HRTF) personalized to the listener contributes to effective spatial audio. An HRTF is a model of a filter that contains all of the acoustic information required to describe how sound reflects or diffracts around a listener’s head, torso, and outer ear before entering their auditory system. The HRTF matches the reproduced audio to the user anatomy to make the audio sound as if it is actually interacting with the user anatomy along an acoustic path from the external location to an ear entrance. Second, an environment-related transfer function (ERTF) specific to a listening environment contributes to effective spatial audio. An ERTF is a model of a filter containing acoustic information required to describe how sound reflects and reverberates within the listening environment. The ERTF matches the reproduced audio to the listening environment to make the audio sound as if it is actually coming from within the listening environment. Third, head tracking of the listener’s head during audio reproduction contributes to effective spatial audio. Head tracking involves tracking a position and/or orientation of the listener’s head and using the tracking information to shift the virtual sound source accordingly. Shifting the virtual sound source opposite to movement of the listener’s head can cause the listener to perceive virtual sound as coming from a fixed location within the listening environment as the user moves his head or body. In

scenarios where personalized HRTFs and ERTFs cannot be obtained, however, a system can use other representations to provide visual cues to a user regarding the presence of virtual sound sources.

In an aspect, an audio system provides a visual reference corresponding to a virtual sound source. For example, the audio system can receive a user input on a display of a device to designate one or more positions within an augmented reality view of a listening environment. The positions can correspond to one or more sound source locations within the listening environment. A corresponding sound source icon, e.g., an image of a loudspeaker, can be displayed at the position on the display to be viewed by a listener. The audio system can reproduce a binaural audio signal, e.g., using a headset, to render spatial audio including a sound coming from the sound source location within the listening environment. The listener can listen to the spatial audio, which may be music or a movie soundtrack, even after setting down or turning off the display of the device. The experience of creating and/or viewing the sound source icon on the display before or during the spatial audio rendition can cause a durable spatial audio experience that is less likely to collapse into the head of the listener.

Referring to FIG. 1, a flowchart of a method of augmenting spatial audio rendition is shown in accordance with an aspect. The operations of the method of FIG. 1 relate to aspects shown in FIGS. 2-5, and accordingly, FIGS. 1-5 are described in combination below.

Referring to FIG. 2, a pictorial view of a user handling an audio system is shown in accordance with an aspect. At operation 102, an audio system 200 receives a user input designating a location in a listening environment. For example, the user input can designate one or more positions on one or more images 202 of the listening environment 210. The user can perform a set up process to place one or more sound source icons, e.g., visual representations of speakers, at specified positions in an augmented reality view on a display 204.

In an aspect, the user can open an audio application executing on mobile device 212. The audio application can be a music application or a movie application that renders spatial audio to the user. More particularly, the spatial audio rendition can be music or a movie soundtrack. The user can perform operations within the audio application to initiate an augmented reality view.

The augmented reality view can include the presentation of one or more images 202 of listening environment 210. For example, the one or more images 202 of listening environment 210 can be frames of a video of listening environment 210. Listening environment 210 can be the actual environment in which audio system 200 is being used by the user, e.g., a car, a living room, etc. Alternatively, as described below, listening environment 210 can be a simulated space that the user wishes to emulate in the spatial audio rendition, e.g., a concert hall, a movie theater, etc. In any case, image(s) 202 of listening environment 210 can be presented to the user on display 204.

The user can view images 202 of listening environment 210 to find positions 208 in the augmented reality view where sound sources are to be placed. For example, the user can move mobile device 212 to view, in images captured by a camera of mobile device 212, a location 214 within listening environment 210. Location 214 can be, for example, a point to the left of a television display, a computer monitor, etc. Location 214 can be a place where a left speaker of a surround sound system would normally be located.



5

In an aspect, when location **214** is identified, the user can enter a user input to designate location **214** in the listening environment **210**. The user input can designate position **208** on image **202** corresponding to location **214** in listening environment **210**. An input device **206** of audio system **200** receives the user input designating position **208** on the one or more images **202** of listening environment **210**. Input device **206** can be, for example, a touchscreen of a device, e.g., a mobile device **212**. For example, the user input can include a tap on display **204** at position **208** to designate position **208** on image **202**.

It will be appreciated that location **214** in listening environment **210** corresponds to position **208** on image **202**, however, location **214** with respect to the listening environment **210** may be different than position **208** with respect to the augmented reality view of the listening environment **210**. More particularly, location **214** may be at a first point in space adjacent to the television display **204** within the actual listening environment **210**, and position **208** may be a second point in space on display **204** (where the user tapped display **204**) adjacent to the graphical representation of television display in the augmented reality view of listening environment **210**. Given that the camera of mobile device **212** may utilize a wide-angle lens, a field of view of image **202** may be different than a field of view seen by the user. Accordingly, position **208** on the one or more images (or frames of video) of the augmented reality view of listening environment **210** may have a different relative direction from the user then location **214** in listening environment **210**.

Audio system **200** includes a headset **215**, e.g., headphones, to be worn by the user during a spatial audio rendition. Headset **215** can be configured to render spatialized audio including sound **217** localized to location(s) in listening environment **210**, as described below. In an aspect, headset **215** include a head tracking system to track a direction of headset **215** relative to an azimuth **219**. Azimuth **219** can be a reference direction that is predetermined, e.g., due north, or selected during operation, e.g., as a calibration direction that is entered into audio system **200**. In an aspect, a first direction **220** from the user and/or a speaker **222** of headset **215** to location **214** in a listening environment **210** can be different than a second direction **224** from the user and/or speaker **222** to position **208** on the one or more images **202** (or frames of video) of listening environment **210**. Accordingly, position **208** and location **214** can have different relative directions from azimuth **219** and/or headset **215**.

Additional positions for virtual sound sources can be designated by the user through interactions with input device **206**. For example, the user can designate another sound source position, e.g., for a right speaker of a surround sound system. The designated position can be entered in the augmented reality view by tapping on image **202** at a second position **227** of the touchscreen. Input device **206** can receive the tap as a second user input designating second position **227** for a second sound source to be rendered within listening environment **210**. Second position **227** in the augmented reality view of listening environment **210** can correspond to, but be different than, a second location **216** within the actual listening environment **210** at which the second sound source is to be located.

The user can continue to designate positions for sound sources by moving mobile device **212** to view different locations within listening environment **210** and tapping or otherwise entering a command to set the positions where sound sources are to be located. For example, if the user

6

wishes to simulate a surround sound system having virtual sound sources at center, front, and rear locations, the user can view and tap on images **202** of the center, front, and rear locations within the augmented reality view.

At operation **104**, as the location is designated by the user, a visual representation of a sound source at the location can be presented in the listening environment. For example, as positions are designated by the user, audio system **200** can present sound source icons overlaid on the one or more images **202** at the positions. A sound source icon **226** can be presented at position **208** on display **204** of audio system **200** in response to the user input designating position **208** to the left of the television screen in the augmented reality view. In an aspect, sound source icon **226** at position **208** is a visual representation of a sound source at the corresponding location **214** in the actual listening environment **210**. In other words, sound source icon **226** is a visual cue to the user, which associates the location **214** (where sounds will be localized to) with a sound source (that the user will psychologically perceive as creating the localized sound). The visual cue creates a psychoacoustic effect of convincing the user that a sound source is actually generating the spatialized sound **217** even when the user has stopped viewing sound source icon **226** in the images **202** on display **204**.

Referring to FIG. 3, a pictorial view of a sound source icon overlaid on one or more images of an actual listening environment is shown in accordance with an aspect. One or more sound source icons can be visible on display **204** at a time. For example, display **204** can present sound source icon **226** corresponding to location **214**, and a second sound source icon **302** corresponding to second location **216**. The sound source icons can be overlaid on the one or more images **202** at position **208** and a second position **227**, e.g., to the left and right of the television display, within the augmented reality view. Accordingly, as the user views the sound source icons on display **204**, the illusion of sound sources within the listening environment **210**, which the icons visually represent, is reinforced.

In an aspect, input device **206** can receive user selections of listening environment **210** from several listening environment options. The user selections can be made as user inputs to input device **206**, e.g., selecting a listening environment option from a predetermined list of options. As described above, listening environment **210** can be the actual listening environment that audio system **200** is used within. For example, listening environment **210** can be a living room where the user is currently using audio system **200**. In such case, the user can enter a command within the audio application, e.g., tap on a listening environment option that is presented on display **204** and titled "Local Environment," to enter the augmented reality view in which the camera of mobile device **212** captures images **202** of the surrounding environment for presentation on display **204** (FIG. 3). Alternatively, listening environment **210** can be a simulated listening space. In such case, the user can enter a command within the audio application, e.g., tap on a listening environment option that is presented on display **204** and titled "Famous Movie Theater," to enter the augmented (or virtual) reality view in which an augmented (or virtual) reality scene of a predetermined well-known movie theater is presented on display **204** (FIG. 4).

Audio system **200** can employ an ERTF corresponding to the selected listening environment option when rendering spatial audio. For example, in the case of the listening environment option being a listening space within which the user is presently situated, audio system **200** can use impulse response measurements based on audio signals output by a

speaker of mobile device **212** and audio inputs received by a microphone of mobile device **212** to determine the acoustic characteristics of listening environment **210**, e.g., reflection characteristics, reverberation characteristics, etc. In the case of the listening environment option being a predetermined listening space simulation, such acoustic characteristics can be stored in a memory of mobile device **212** as part of the simulation model (visual and acoustic information) for the selected listening scene. The acoustic information can be applied to an audio input signal when rendering spatial audio to cause the rendered audio to sound as if the virtual sound sources are playing within the selected listening environment **210**.

In an aspect, input device **206** can receive user selections of sound sources from several sound source options. The user selections can be made as user inputs to input device **206**, e.g., selecting a sound source option from a predetermined list of options. The selected sound source options can be customized to each designated position on display **204**. For example, the user may enter a command to designate the sound source visually represented by sound source icon **226** as being a loudspeaker **306** having a predetermined acoustic performance. More particularly, loudspeaker **306** can be a high-end audio speaker of a predetermined model from a predetermined manufacturer. The acoustic performance of loudspeaker **306**, e.g., the acoustic output of the combined driver and cabinet system, can be measured and a corresponding model can be stored in the memory of mobile device **212**. Similarly, the user may enter a command to designate the second sound source visually represented by second sound source icon **302** as another loudspeaker of a low fidelity type. The lo-fi speaker can have a predetermined model from a predetermined manufacturer, and an acoustic model of the speaker can be stored in the memory of mobile device **212**. Accordingly, audio filters for the predetermined sound sources can be applied to an audio input signal during spatial audio rendering to create the illusion that the user is listening to a particular model of speaker. Furthermore, the selected sound generating source can be visually represented by sound source icons that visually replicate the chosen loudspeaker models. More particularly, sound source icons can be three-dimensional animated renderings of the chosen loudspeakers. Accordingly, the spatial audio illusion is reinforced by visually presenting imagery of the sound source to the user.

In an aspect, the sound sources can be set as objects other than loudspeakers. For example, the user may select a musical instrument, such as a cello, from a list of sound source options when listening to a live recording of a cello performance. In another aspect, sound source icons **226**, **302** can be more generic in nature. For example, sound source icon **226** can be a visual aid, including a dot, a sound meter, or any other visual cue located at position **208** corresponding to location **214** of the sound source. In any case, sound source icon **226** can visually reinforce the acoustic illusion of the sound source when spatial audio is rendered by mobile device **212**.

Referring to FIG. 4, a pictorial view of a sound source icon overlaid on one or more images of a simulated listening environment is shown in accordance with an aspect. Sound source icons **226**, **302** can be animated representations **402** of respective sound sources. For example, in the case where sound source icon **226** is a three-dimensional visual model of loudspeaker **306**, the diaphragms of loudspeaker **306** can visibly vibrate within the augmented reality view. In an aspect, sound source icon **226** includes a dot or an orb that is animated to give a visual sense that the icon is generating

sound. The graphical effects can provide realism and visual interest to entice the user to spend more time looking at the visual reference, thereby enhancing the durability of the psychoacoustic effect.

In an aspect, animated representation **402** of the sound source can include an animation parameter corresponding to a sound parameter of an audio input signal. More particularly, headset **215** can generate sound **217** based on the audio input signal, which includes sound parameters such as level, tone, etc. Similarly, animated representation **402** can have animation parameters, such as a color of the sound source icon, a dimension of the sound source icon, or other characteristics that define the icon. The animation parameter may be proportional to the sound parameter. For example, sound source icon **226** can be a pulsing orb having an aura that visibly changes color or moves in time with music coming from location **214**. In such case, a diameter of the aura can increase as a level of sound **217** increases, and vice versa. By moving in sync with sound **217**, sound source icon **226** is a visual tie-in to help the user believe that sound **217** is coming from the external location **214**.

Referring to FIG. 5, a schematic view of spatial audio processing by an audio system is shown in accordance with an aspect. A component of audio system **200**, e.g., one or more of device or headset **215**, can include one or more processors to execute instructions to carry out the different functions and capabilities described herein. Instructions executed by the processor(s) may be retrieved from a memory, e.g., in device **212** and/or headset **215**, which may include a non-transitory machine readable medium. The instructions may be in the form of an operating system program having device drivers and/or an audio rendering engine for rendering music playback, binaural audio playback, etc., according to the methods described herein. The processor(s) can retrieve data from the memory for various uses. For example, the processor(s) can retrieve data to render spatial audio corresponding to a source input signal **502**, e.g., audio data corresponding to music, a movie soundtrack, or another audio signal stored in the memory.

The user may wish to experience the sounds encoded within source input signal **502** as if the sounds are generated at the various locations within listening environment **210** as defined through the audio application. For example, the user may have designated sound source icons to visually represent a surround sound system within a living room. Source input signal **502**, however, may be a mono signal or a stereo signal, and thus, may have fewer channels than the number of sound sources that are being simulated within listening environment **210**. For example, the user may have designated two sound sources to be localized to location **214** and second location **216**. Source input signal **502** may, however, have only a single channel. In an aspect, one or more processors of audio system **200** can upmix source input signal **502** to generate audio input signals corresponding to each the sound source. For example, source input signal **502** can be upmixed to an audio input signal **504** corresponding to the sound source at location **214** and a second audio input signal **506** corresponding to the sound source at second location **216**. More particularly, source input signal **502** can be upmixed to a number of channels equal to the number of sound source icons placed at respective positions **208** in the displayed augmented reality listening environment.

At operation **106**, one or more processors of audio system **200** can apply head-related transfer functions (HRTFs) to the generated audio input signals. The HRTFs can correspond to the locations within listening environment **210** at which the sound sources for the audio input signals are set. For

example, audio system **200** can apply a first HRTF **508** to audio input signal **504** corresponding to the sound source at location **214**, and a second HRTF **510** to second audio input signal **506** corresponding to the second sound source at second location **216**. Each HRTF **508/510** can include information for a different speaker **222** of headset **215**. For example, HRTF **508** can have left speaker information (left channel information) and right speaker information (right channel information), and HRTF **510** can have left speaker information (left channel information) and right speaker information (right channel information). Accordingly, application of the HRTFs to the respective audio input signals can generate a respective binaural audio signal for each sound source. More particularly, the one or more processors can generate a binaural audio signal **512** corresponding to the sound source at location **214**, and a second binaural audio signal **514** corresponding to the sound source at second location **216**.

At operation **108**, audio system **200** renders spatialized audio using the binaural audio signals to localize sounds to the respective locations within listening environment **210**. For example, one or more speakers **222** of headset **215**, e.g., a left speaker and a right speaker, can receive the binaural audio signals for playback. All of the generated binaural audio signals can be combined by the one or more processors of audio system **200**. The combined binaural audio signal can have a left channel for playback by the left speaker **222** of headset **215** and a right channel for playback by the right speaker **222** of headset **215**. Playback of the combined binaural audio signal by headset **215** can generate spatialized audio including sounds localized to the locations within the spatial audio soundscape. For example, playback can include playback of binaural audio signal **512** to localize sound **217** to location **214**, and playback of second binaural audio signal **514** to localize sound **217** to second location **216**. Accordingly, audio system **200** can render a spatial audio soundscape around the user with sounds coming from locations that correspond to sound source icons shown at various positions on display **204**.

The audio application executing on audio system **200** may allow for additional controls and visual cues that enforce the spatial audio illusion. In an aspect, the user can interact with the audio application to place one or more control icons within the augmented reality view. For example, input device **206** can receive user selections of audio mixing controls from a predetermined list, and one or more user inputs designating positions on display **204** where the mixing controls can be placed. For example, the user can place a virtual knob on images of a desk in front of the user. In response to the user selection and designation, audio system **200** may present an augmented reality control panel on the surface for the user to view and control. More particularly, the user can press, turn, slide, or otherwise interact with the controls on the touchscreen to cause corresponding adjustments to the audio input signals. By way of example, the user can turn a virtual knob on display **204** to adjust a bass level of a sound source generating sound **217** at location **214**. The combination of visual cues representing the sound sources and the ability to virtually control the sounds coming from the sound sources can further enhance the spatial audio illusion and make the illusion more durable.

In an aspect, rendered sounds come from the locations within the actual listening environment **210** where the sound sources are set. As described above, the locations may be at different relative directions from the user (or headset **215**) than the positions of the corresponding sound source icons on display **204**. It will be appreciated that this difference in

relative direction may contrast with, for example, a virtual reality environment in which sounds are rendered to come from the exact position on the virtual reality display that is being viewed by the user. Similarly, this contrasts with a system that renders sounds as coming from animated characters displayed on a screen. More particularly, the icons presented on display **204** act as visual representations of sound sources located at other locations (at different distances or angles from the user than the icons) to reinforce the perception that sounds are coming from another location, rather than being animations that are the sound sources in the illusion.

As a function of the above-noted contrast, the user may stop viewing the simulated listening environment on display **204**, and the spatial audio may continue to be perceived as including sounds externalized to the locations in the actual listening environment **210**. For example, the user may set down mobile device **212**, place display **204** in a sleep mode, etc., after the spatial audio rendition begins. While the spatial audio rendition continues, the user may therefore not be viewing the sound source icons. More particularly, the speaker(s) **222** of headset **215** can continue rendition of the spatialized audio after display **204** discontinues presentation of the one or more images **202**. Despite the lack of a visual representation of the sound source, the user may continue to perceive the spatialized sounds **217** as coming from the locations within listening environment **210**. The illusion can continue for a prolonged period of time even when the HRTF, ERTF, or head tracking used for audio rendering is imperfect. That is, the illusion may not collapse after the user stops viewing the visual cues. It will be appreciated that this psychoacoustic effect—a continued spatial audio experience and/or a more durable spatial audio experience—can contrast with the effect of discontinuing display of animations within a virtual reality environment. In the virtual reality environment, if the user stops viewing the virtual reality display, the virtual audio illusion may collapse immediately or quickly into a non-spatial internalized audio experience.

In an aspect, the audio system **200** can be a head-mounted display (HMD). The HMD can integrate both the device **212** and the headset **215** into a single device. The HMD can be a display device that incorporates the display **204** used to present the visual representation of the sound source at the location, and the headset **215** used to render spatialized audio to localize sounds to the locations. The HMD can be worn on a head of the user to allow the user to see images presented on the display **204** and hear sounds played by the headset **215**.

Display **204** of an HMD can be an opaque display or a transparent display. An opaque display can be a miniaturized display, e.g., a liquid-crystal display or an organic light-emitting diode display, that displays images captured by a camera. The opaque display may not allow a user to view the real world directly through the display. By contrast, a transparent display, also known as an optical head-mounted display, can display both computer-generated imagery and real world imagery. The computer-generated imagery can be projected onto transparent lenses and superimposed on the real world imagery that is viewable by the user through the transparent lenses of the display.

When audio system **200** includes an HMD, user inputs, e.g., to designate the location in the listening environment, may be made in various manners. More particularly, the HMD may be connected to a controller, or may include a controller, that serves the function of the input device of the device **212**. The input device can have input features to

11

allow the user to select positions within a displayed image to represent the locations in the listening environment. For example, the controller can be a joystick-type device having buttons to receive the user inputs. Alternatively, the controller can be a mobile device having a touchpad to receive the user inputs. Inputs may also be detected through speech recognition, gesture recognition, eye tracking, etc., as will be appreciated by one skilled in the art. Accordingly, the user can select the positions for the sound source icons using the controller of the HMD audio system.

As described above, visual representations, e.g., sound source icons, can be displayed on the HMD at the selected positions to represent sound sources at the locations within the listening environment. HRTFs can be applied to audio input signals as described above, and spatialized audio can be rendered to the user through speakers of the HMD to localize sounds to the locations. Accordingly, although the audio system 200 has been primarily described in relation to a system including a device 212 and a headset 215, one skilled in the art will understand that the audio system 200 and its functionality may be embodied in an HMD.

In an aspect, the user can enter commands to move or remove sound source icons after the icons are initially placed. For example, the user can drag and drop the sound source icons to different positions within the simulated listening environment, and corresponding adjustments to the spatial audio can be made to render sounds from a correspondingly moved location within the actual listening environment 210. The audio application can also allow the user to remove sound source icons to discontinue spatial audio playback of sounds from corresponding locations. For example, referring to FIG. 4, input device 206 can receive a user interaction 404 with one or more sound source icons to remove the sounds 217 sources from the spatial soundscape. In an aspect, user interaction 404 can be a pinching gesture or another suitable gesture (e.g., a swipe across the position of an icon). More particularly, the user can perform a pinching gesture on the touchscreen over the second position 227 of second sound source icon 302, and in response to the user input, the icon can be removed from the display and the one or more processors can make appropriate adjustments to the spatial audio rendition. For example, the one or more processors can downmix source input signal 502 to maintain parity between the number of binaural audio signals combined for playback by headset 215 and the number of sound source icons in the simulated listening environment. Accordingly, removal of the sound source icon can discontinue, in response to user interaction 404, rendition of spatialized audio from the corresponding sound source.

To aid the Patent Office and any readers of any patent issued on this application in interpreting the claims appended hereto, applicants wish to note that they do not intend any of the appended claims or claim elements to invoke 35 U.S.C. 112(f) unless the words “means for” or “step for” are explicitly used in the particular claim.

In the foregoing specification, the invention has been described with reference to specific exemplary aspects thereof. It will be evident that various modifications may be made thereto without departing from the broader spirit and scope of the invention as set forth in the following claims. The specification and drawings are, accordingly, to be regarded in an illustrative sense rather than a restrictive sense.

What is claimed is:

1. A method of augmenting spatial audio rendition, comprising:

12

receiving, by an input device, a user input designating a location in a listening environment, wherein the user input designates a position on one or more images of the listening environment;

presenting, by a display in response to the user input, a three-dimensional visual representation of an audio speaker overlaid on the one or more images at the designated position;

applying, by one or more processors, a head-related transfer function (HRTF) to an audio input signal to generate a binaural audio signal, wherein the HRTF corresponds to the location in the listening environment;

rendering, by one or more speakers, spatialized audio using the binaural audio signal, wherein the spatialized audio includes sounds localized to the location; and

continuing, by the one or more speakers, rendition of the spatialized audio after the display discontinues presentation of the one or more images.

2. The method of claim 1, wherein the three-dimensional visual representation of the audio speaker is a sound source icon overlaid on the one or more images at the position.

3. The method of claim 2, wherein the location in the listening environment is different than the position on the one or more images.

4. The method of claim 3, wherein the one or more images are frames of a video of the listening environment, and wherein the position on the frames of the video has a different relative direction from the one or more speakers than the location in the listening environment.

5. The method of claim 3, wherein the user input includes a tap on the display at the position.

6. The method of claim 3 further comprising receiving, by the input device, a user selection of the listening environment from a plurality of listening environment options.

7. The method of claim 3 further comprising receiving, by the input device, a user selection of the audio speaker from a plurality of sound source options.

8. The method of claim 7, wherein the sound source icon is an animated representation of the audio speaker, and wherein the animated representation includes an animation parameter corresponding to a sound parameter of the audio input signal.

9. The method of claim 7, wherein the audio speaker has a predetermined acoustic performance.

10. The method of claim 3 further comprising:

receiving, by the input device, a second user input designating a second location in the listening environment;

presenting, by the display in response to the second user input, a visual representation of a second audio speaker at the second location in the listening environment;

upmixing, by the one or more processors, a source input signal to generate the audio input signal and a second audio input signal; and

applying, by the one or more processors, a second HRTF to the second audio input signal to generate a second binaural audio signal, wherein the second HRTF corresponds to the second location in the listening environment.

11. The method of claim 3 further comprising:

receiving, by the input device, a user interaction with the three-dimensional visual representation of the audio speaker; and

discontinuing, in response to the user interaction, rendition of the spatialized audio.

12. An audio system, comprising:  
a device including

13

an input device configured to receive a user input designating a position on one or more images of a listening environment,

a display configured to present, in response to the user input, a sound source icon overlaid on the one or more images at the designated position, wherein the sound source icon is a three-dimensional visual representation of an audio speaker at a location in the listening environment, and

one or more processors configured to apply a head-related transfer function (HRTF) to an audio input signal to generate a binaural audio signal, wherein the HRTF corresponds to the location in the listening environment; and

a headset configured to render spatialized audio using the binaural audio signal, wherein the spatialized audio includes sounds localized to the location, and wherein the location in the listening environment is different than the position on the one or more images, wherein the headset is configured to continue rendition of the spatialized audio after the display discontinues presentation of the one or more images.

13. The audio system of claim 12, wherein the one or more images are frames of a video of the listening environment in which the audio system is being used, wherein the headset includes a head tracking system to track a direction of the headset relative to an azimuth, and wherein the position on the frames of the video has a different relative direction from the azimuth than the location in the listening environment.

14. The audio system of claim 12, wherein the sound source icon is an animated representation of the audio speaker, and wherein the animated representation includes an animation parameter corresponding to a sound parameter of the audio input signal.

15. The audio system of claim 12, wherein the audio speaker has a predetermined acoustic performance.

16. A non-transitory machine readable medium storing instructions executable by one or more processors of an audio system to cause the audio system to perform a method comprising:

14

receiving, by an input device of an audio system, a user input designating a position on one or more images of a listening environment;

presenting, by a display of the audio system in response to the user input, a sound source icon overlaid on the one or more images at the designated position, wherein the sound source icon is a three-dimensional visual representation of an audio speaker at a location in the listening environment;

applying, by one or more processors of the audio system, a head-related transfer function (HRTF) to an audio input signal to generate a binaural audio signal, wherein the HRTF corresponds to the location in the listening environment;

rendering, by one or more speakers of the audio system, spatialized audio using the binaural audio signal, wherein the spatialized audio includes sounds localized to the location, and wherein the location in the listening environment is different than the position on the one or more images; and

continuing, by the one or more speakers, rendition of the spatialized audio after the display discontinues presentation of the one or more images.

17. The non-transitory machine readable medium of claim 16, wherein the one or more images are frames of a video of the listening environment in which the audio system is being used, and wherein the position on the frames of the video has a different relative direction from the one or more speakers than the location in the listening environment.

18. The non-transitory machine readable medium of claim 16, wherein the sound source icon is an animated representation of the audio speaker, and wherein the animated representation includes an animation parameter corresponding to a sound parameter of the audio input signal.

19. The non-transitory machine readable medium of claim 16, wherein the audio speaker has a predetermined acoustic performance.

\* \* \* \* \*