Exp 11b

Aim: Simulate Static Routing Configuration using Cisco packet tracer.

Router	Available networks on local interface	Networks available on other routers interface
Router 0	10.0.0.0/8, 20.0.0.0/8, 40.0.0.0/8	30.0.0.0/8, 50.0.0.0/8
Router 1	20.0.0.0/8, 30.0.0.0/8, 50.0.0.0/8,	10.0.0.0/8, 40.0.0.0/8
Router 2	40.0.0.0/8, 50.0.0.0/8	10.0.0.0/8, 20.0.0.0/8, 30.0.0.0/8

Router 0 Requirements.

1. Create two routes for network 30.0.0.0/8 and Configure the first route (via Router 1) as the backup route.
2. Create two routes for the host 30.0.0.100/8 and Configure the first route (via Router 2) as the main route & the second route as backup route
3. Create two router for network 10.0.0.0/8 & Configure the first route (via Router 2) as the main route & second route as backup route.
4. Verify the router adds only main routes to the routing table

Router 0 Configuration.

Router > enable
Router # Configure
terminal
Enter Configuration Commands, one per line End with
CNTL/Z


Router(config)# ip route 30.0.0.0 255.0.0.0 20.0.0.
Router(config)# ip route 30.0.0.0 255.0.0.0 40.0.0.2
Router(config)# ip route 30.0.0.0 100.255.255.255
Router(config)# ip route 50.0.0.0 255.0.0.0 20.0.0.2
Router(config)# exit
Router(config)# do show ip route static.

Access the CLI prompt of Router 0 & run the following commands

Similar to Router 0 Configure Router 1 & Router 2

verifying static routing:

The tracert command sends ping requests to destination host and tracks the path they take to reach destination.

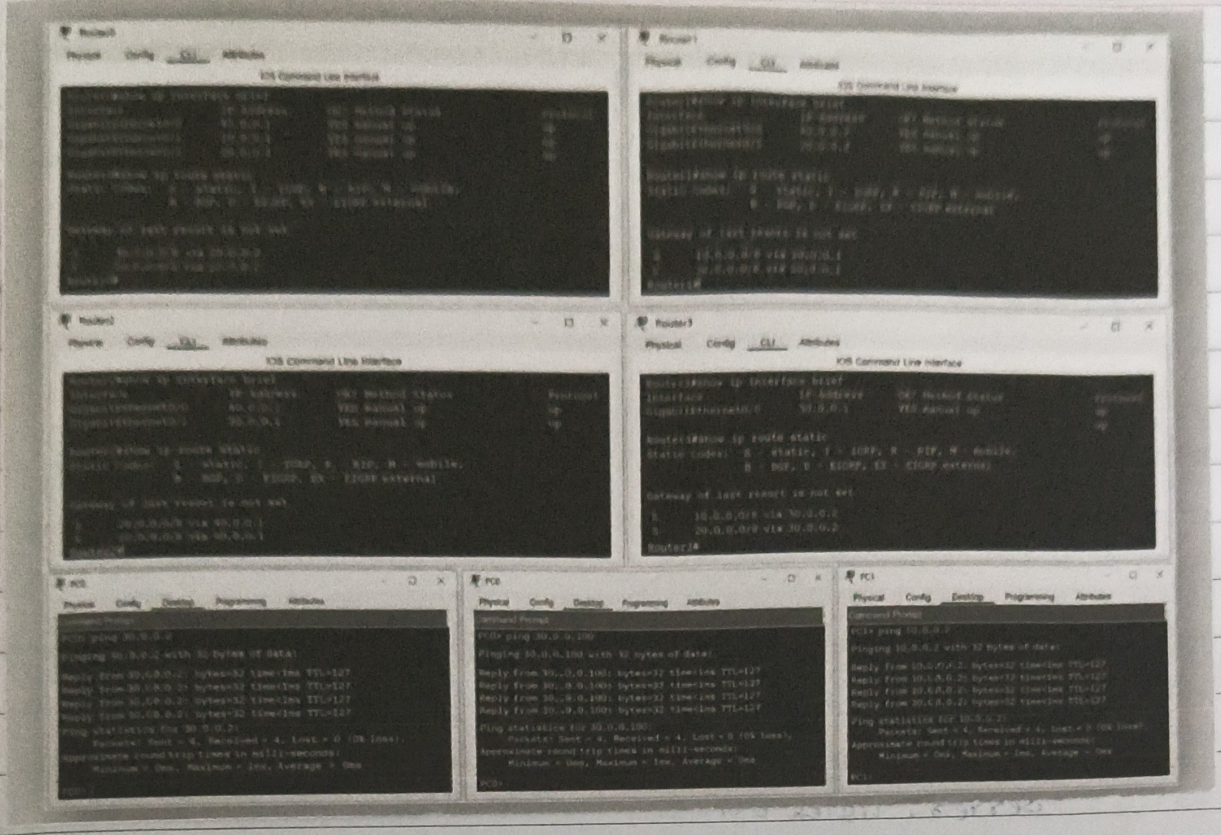

Result:

Therefore Simulation of static Routing using Cisco packet tracer has been executed successfully.