Exp - 10

Simulate RIP using cisco packet tracer

Initial IP configuration

Device	Interface	IP Configuration	Connected with
PC0	Fast Ethernet	10.0.0.2/8	Router's Fa0/1
Router0	Fa0/1	10.0.0.1/8	PC0's Fast Ethernet
Router1	S0/1/1	192.168.1.253/30	Router2's S0/1/1
Router2	S0/1/0	192.168.1.254/30	Router1's S0/1/1
PC1	Fast Ethernet	20.0.0.2/8	Router2's Fa0/1

Assign IP address to PC1

Double click PC → Desktop → IP configuration

Assign the IP address

Double click the Router 0

Following commands assign one per line end with CNTL Z

Following commands assign IP address as Fast Ethernet 0/0

Router (config) # interface loopback Ethernet 0/0

Router (config-if) # ip address 10.0.0.1

Router (config-if) # exit

Router (config) #

interface fastEthernet 0/0 command is used to enter interface

Router:

Router # enable

Router # configure terminal

Enter configuration commands one per line end with Router (config)


Router (config-if) # no shut down


Router (config-if) # exit


Router (config-if) # bandwidth 64

Router (config - if) # no shutdown
exit
Receiver 2 stop
Enable RIP Routing protocol from global configuration mode
Tell RIP routing protocol from global configuration mode / you want to advertise
Router rip - tell router to enable routing protocol.

network - Specifies network which we want to advertise.
Router 0:
Router 0 (config) # router rip
Router (config - router) # network 10.0.0.0
Router (config - Router) # network 192.168.1.252
Router 1:
Router 1 (config) # Router ip
Router 1 (config - router) # network 192.168.12.244
Router 1 (config) # network 192.168.1.248
Router 2
Router 2 (config) # router rip
Router 2 (config - router) # network 2n - n

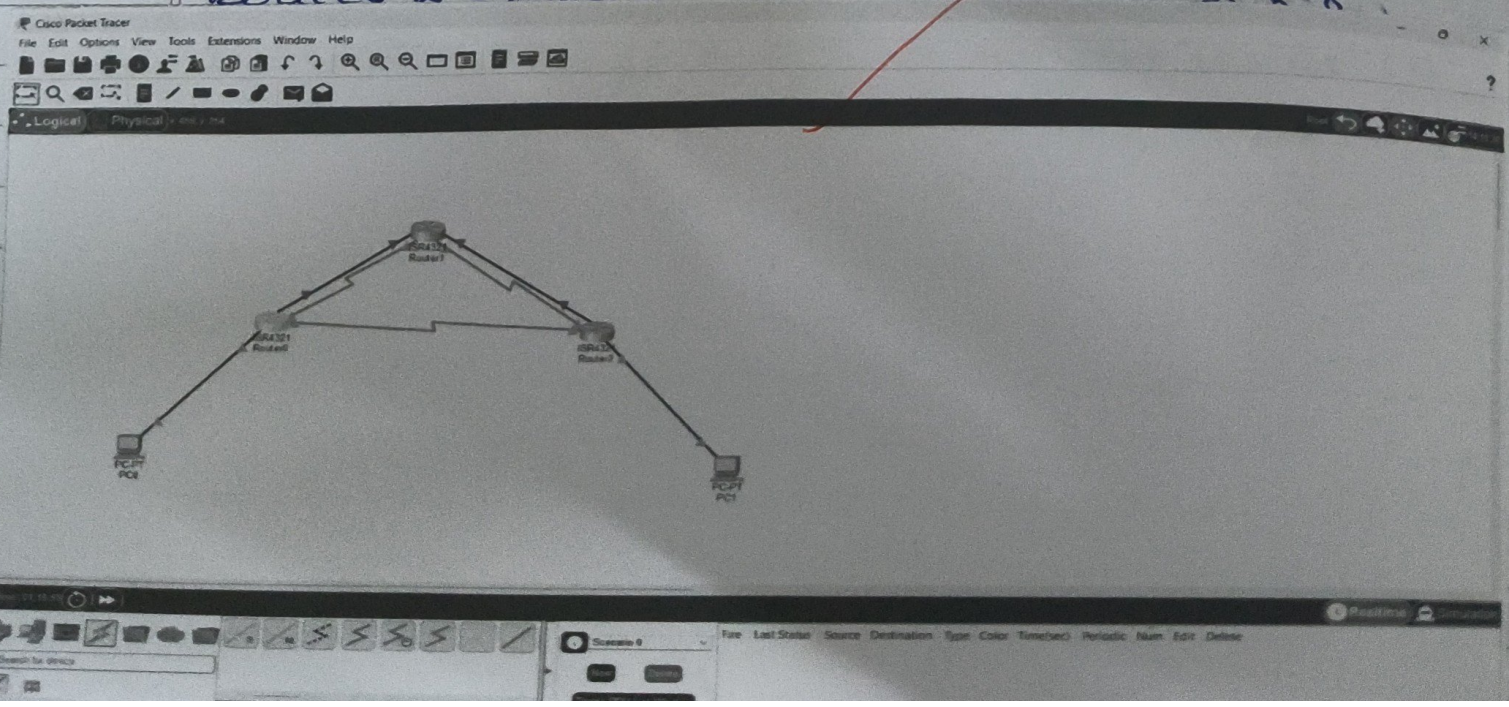

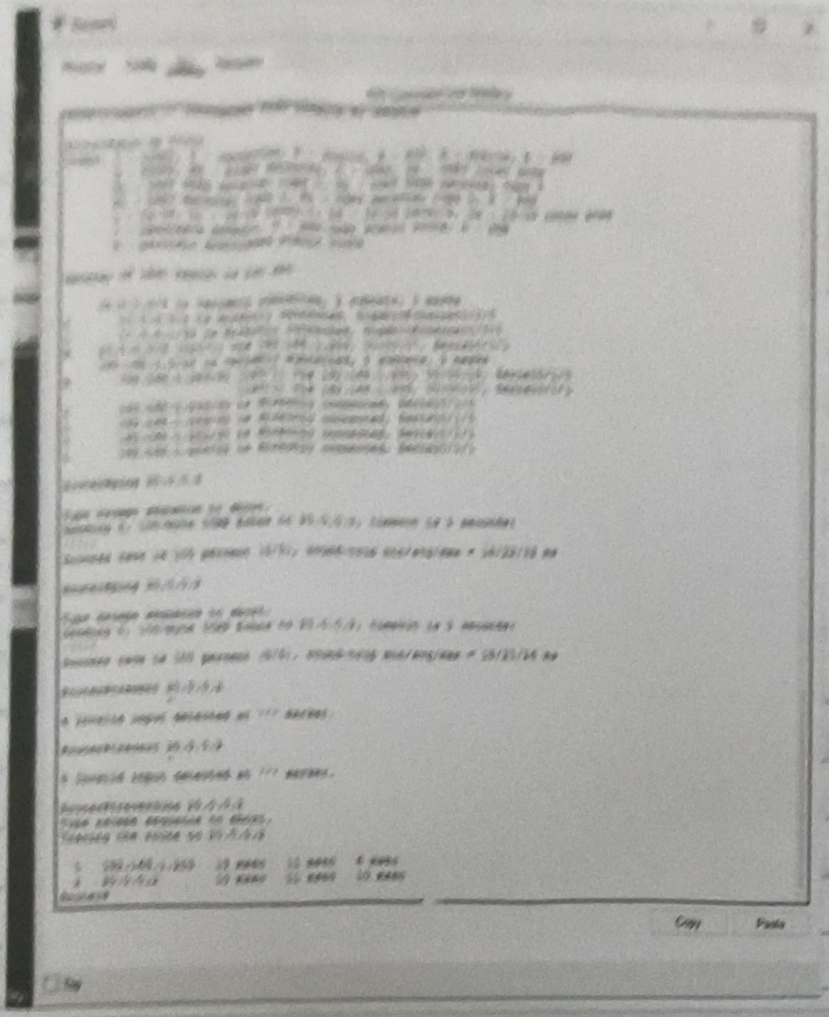

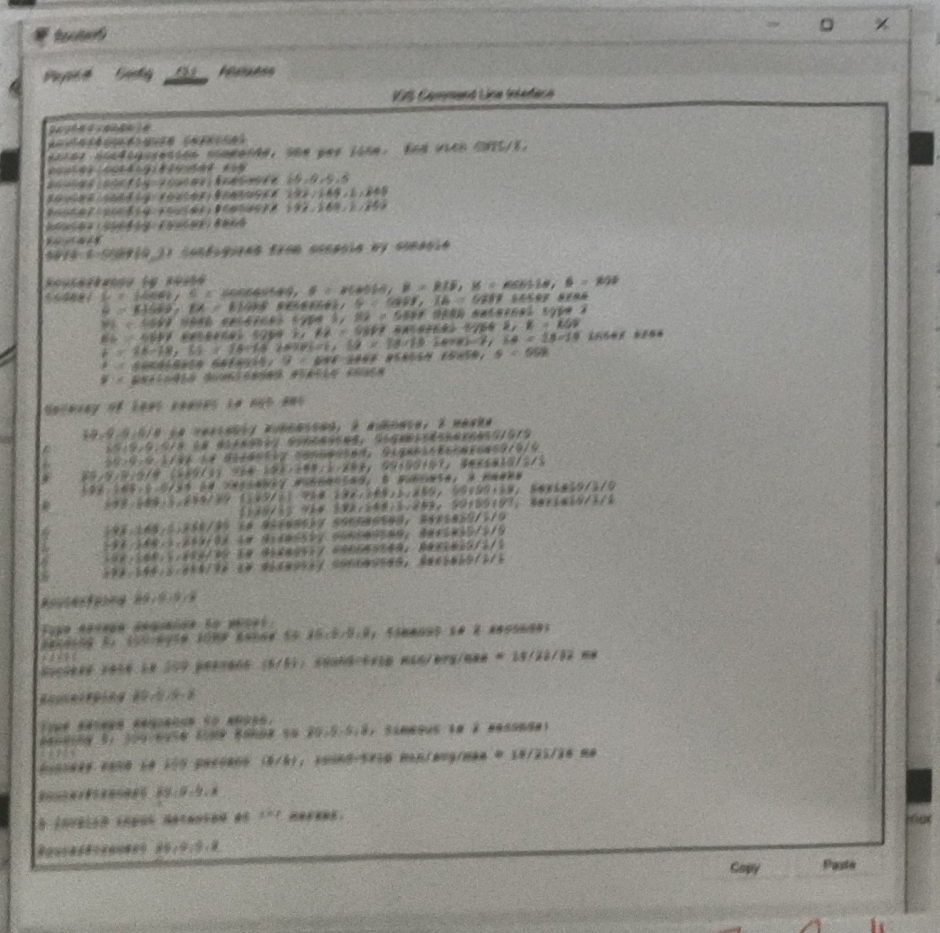

Result:

Therefore to Simulate RIP using Cisco packet tracer executed successfully.