


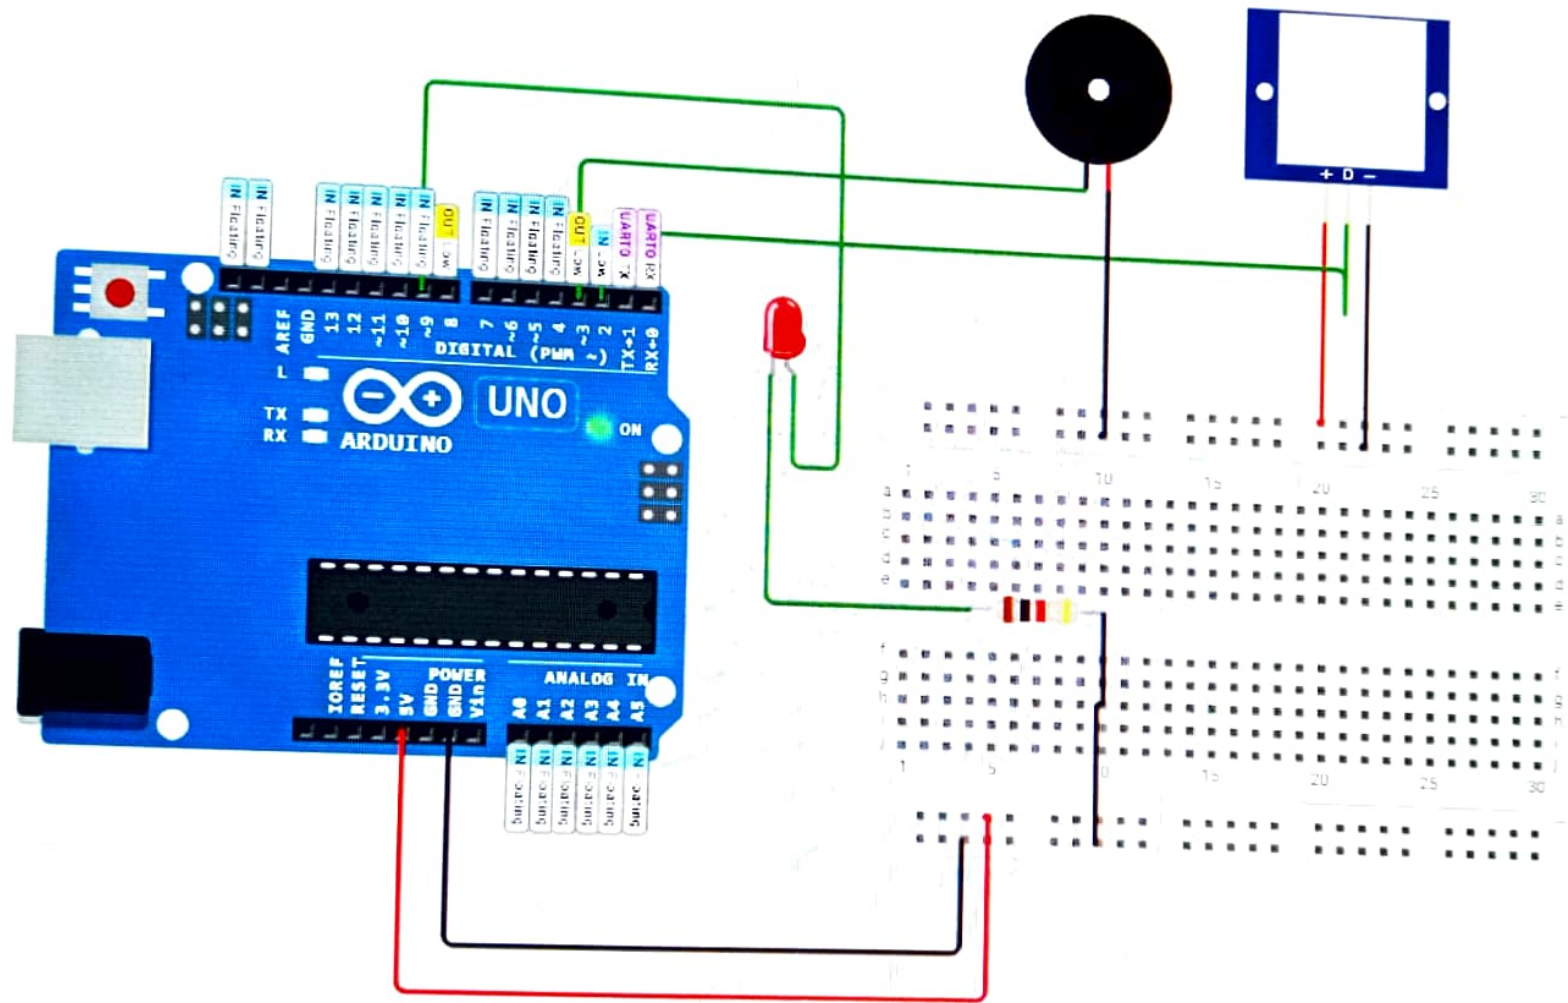

```
1  int pirPin = 2;           // PIR sensor output
2  int ledPin = 8;           // LED
3  int buzzerPin = 3;        // Buzzer
4
5  void setup() {
6      pinMode(pirPin, INPUT);
7      pinMode(ledPin, OUTPUT);
8      pinMode(buzzerPin, OUTPUT);
9      Serial.begin(9600);
10     Serial.println("Security System Starting...");
11     delay(2000); // PIR calibration time
12     Serial.println("System Ready");
13 }
14
15 void loop() {
16     int motion = digitalRead(pirPin);
17
18     if (motion == HIGH) {
19         digitalWrite(ledPin, HIGH); // LED ON
20         digitalWrite(buzzerPin, HIGH); // Buzzer ON
21         Serial.println("INTRUDER ALERT! Motion Detected");
22         delay(1000); // Keep alarm on for 1 sec
23     }
24     else {
25         digitalWrite(ledPin, LOW); // LED OFF
26         digitalWrite(buzzerPin, LOW); // Buzzer OFF
27         Serial.println("Area Secure - No Motion");
28     }
29     delay(100);
30 }
```

Security System Starting...

System Ready

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

Area Secure - No Motion

INTRUDER ALERT! Motion Detected

INTRUDER ALERT! Motion Detected

INTRUDER ALERT! Motion Detected

INTRUDER ALERT! Motion Detected

INTRUDER ALERT! Motion Detected