


Program 1

Aim: Create a topology and simulate sending a simple PDU from source to destination using hub and switch as connecting devices and demonstrate ping messages.

Experiment - 1 ③

1. PC to Server

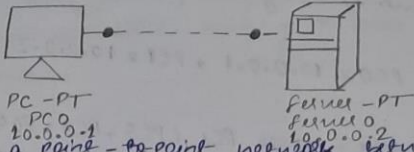

The diagram shows a PC on the left and a server on the right, connected by a dashed line representing a network cable. Below the PC is the label "PC-PT PC0 10.0.0.1". Below the server is the label "Server-PT Server0 10.0.0.2".


Aim: To set up a point-to-point network between a PC & a server, facilitating direct communication to observe data exchange.

Topology: A PC (PC0) is connected to a server (Server0) using a crossover ethernet cable.

IP address of PC0 : 10.0.0.1
IP address of Server0 : 10.0.0.2

Observation: The direct connections allow PC0 to communicate with Server0, which is typical in small networks for tasks such as file sharing, sending service requests or testing server responses to client queries.

2. Hub and Switch

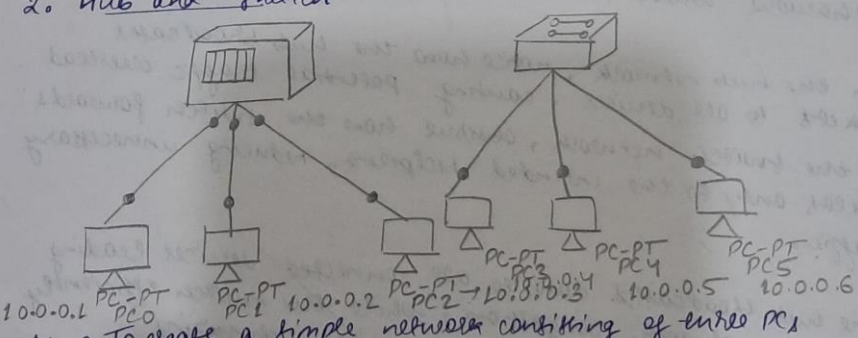

The diagram shows two central devices at the top: a hub on the left and a switch on the right. The hub is connected to three PCs below it, labeled "PC-PT PC0 10.0.0.1", "PC-PT PC1 10.0.0.2", and "PC-PT PC2 10.0.0.3". The switch is connected to three PCs below it, labeled "PC-PT PC3 10.0.0.4", "PC-PT PC4 10.0.0.5", and "PC-PT PC5 10.0.0.6".

Aim: To create a simple network consisting of three PCs connected to a central hub and another network with three PCs connected to a switch. This configuration will help observe the behaviour of data transmission using hub & switch devices.

Topology:

1. Hub Network: Three PCs (PC0, PC1, PC2) are connected to a hub (Hub 0) using straight-through Ethernet cables.

IP addresses: PC0 = 10.0.0.1, PC1 = 10.0.0.2, PC2 = 10.0.0.3.

2. Switch Network: Three PCs (PC3, PC4, PC5) are connected to a switch (Switch 0) using straight-through Ethernet cables.

IP addresses: PC3 = 10.0.0.4, PC4 = 10.0.0.5, PC5 = 10.0.0.6.

Procedure:

1. Add 1 hub, 1 switch and 6 PCs (PC0, PC1, PC2 for the hub; PC3, PC4, PC5 for the switch) to the Cisco Packet Tracer workspace.
2. Use copper straight-through cables to connect PC0, PC1, and PC2 to Hub 0. Use the same type of cables to connect PC3, PC4 & PC5 to Switch 0.
3. Assign IP addresses to each PC & obtain subnet mask.
4. Switch to simulation mode to observe data traffic behaviour when packets are sent between the devices.
5. In the hub network, notice how the hub broadcasts packets to all devices, causing potential traffic overload. In the switch network, observe how the switch forwards packets only to the intended recipient, reducing unnecessary traffic.
6. The hub broadcasts data to all connected devices leading to more network congestion, while the switch efficiently sends data only to the correct device, optimizing performance.

Observation:

1. The hub broadcasts packets to all devices, which may cause unnecessary traffic. (5)
2. The switch forwards packets only to the appropriate device by learning MAC addresses, making it more efficient in reducing traffic.


Difference between Hubs and Switches.

<u>Hubs</u>	<u>Switches</u>
1. Hub broadcast data to all devices	1. Switches send it only to the destination.
2. Hubs create more traffic	2. Switches reduce traffic by directing data.
3. Hubs work at physical layer.	3. Switches operate at the data link layer.
4. Hubs are slower due to shared bandwidth	4. Switches are faster with dedicated bandwidth.
5. Hubs are cheaper.	5. Switches are more expensive but more efficient.

LAB-21.

Aim To connect 2 PCs with 2 different routers using Router. (7)

Topology

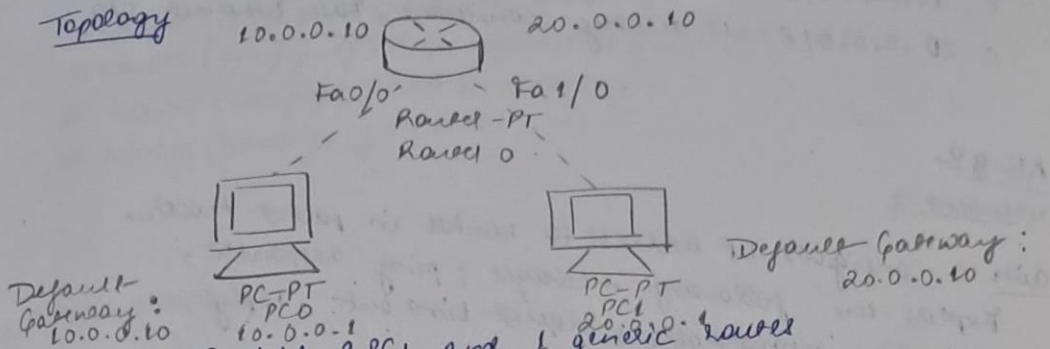

- Procedure:
- Add 2 PCs and 1 generic router
 - Connect PC to router using cross-over wire
 - Set up IP addresses, gateway, subnet mask of both the PCs (in fast ethernet & settings (gateways))
 - In router set up its IP address (both board & on 1/0, 0/0)

(v) open CLI of router and type:

continue with configuration dialog? n

Router # enable

Router # config terminal

Router (config) # interface Fast Ethernet 0/0

Router (config-if) # ip address 10.0.0.10 255.0.0.0

Router (config) # no shutdown

exit

do the same for the other Fast Ethernet 1/0

- (vi) Click on PC → PC0 → Desktop → Command Prompt
Type ping 20.0.0.1 (this sends packet from PC0 to PC1)

Observation:

This sends 32 bytes of data
(sent = 4, lost = 1)

In router CLI

Screen Shots:

