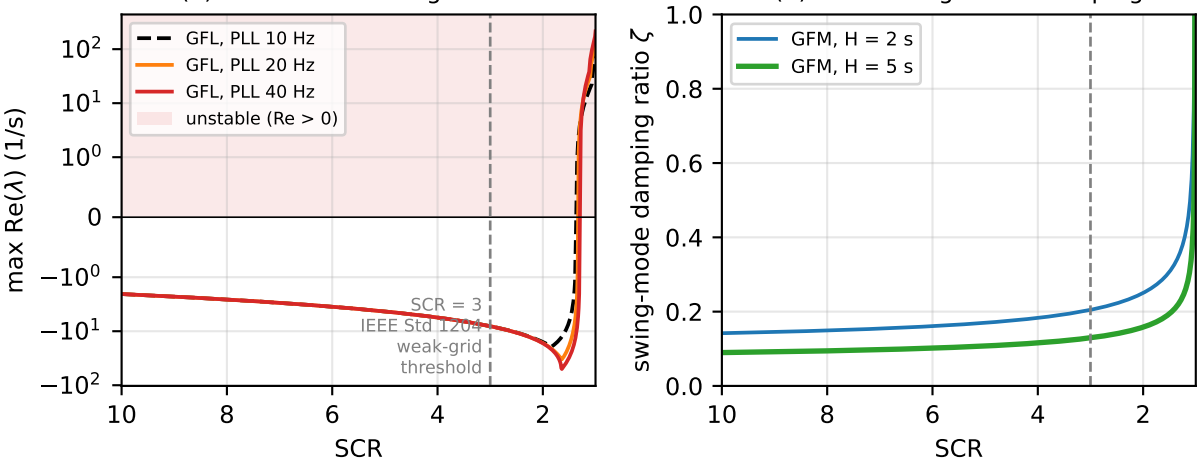
(a) GFL: dominant eigenvalue
GFL, PLL 10 Hz
GFL, PLL 20 Hz
GFL, PLL 40 Hz
unstable (Re > 0)
SCR = 3
IEEE Std 1204
weak-grid
threshold
max Re(λ) (1/s)
SCR
(b) GFM: swing-mode damping
GFM, H = 2 s
GFM, H = 5 s
swing-mode damping ratio ζ
SCR