

62768 system board — placement guide (double-sided, SRM-20 mill)

Regions


Motor power (high current)

Motor feedback

MPPT buck (switching)

Boost (switching)

C2000 feedback (analog)

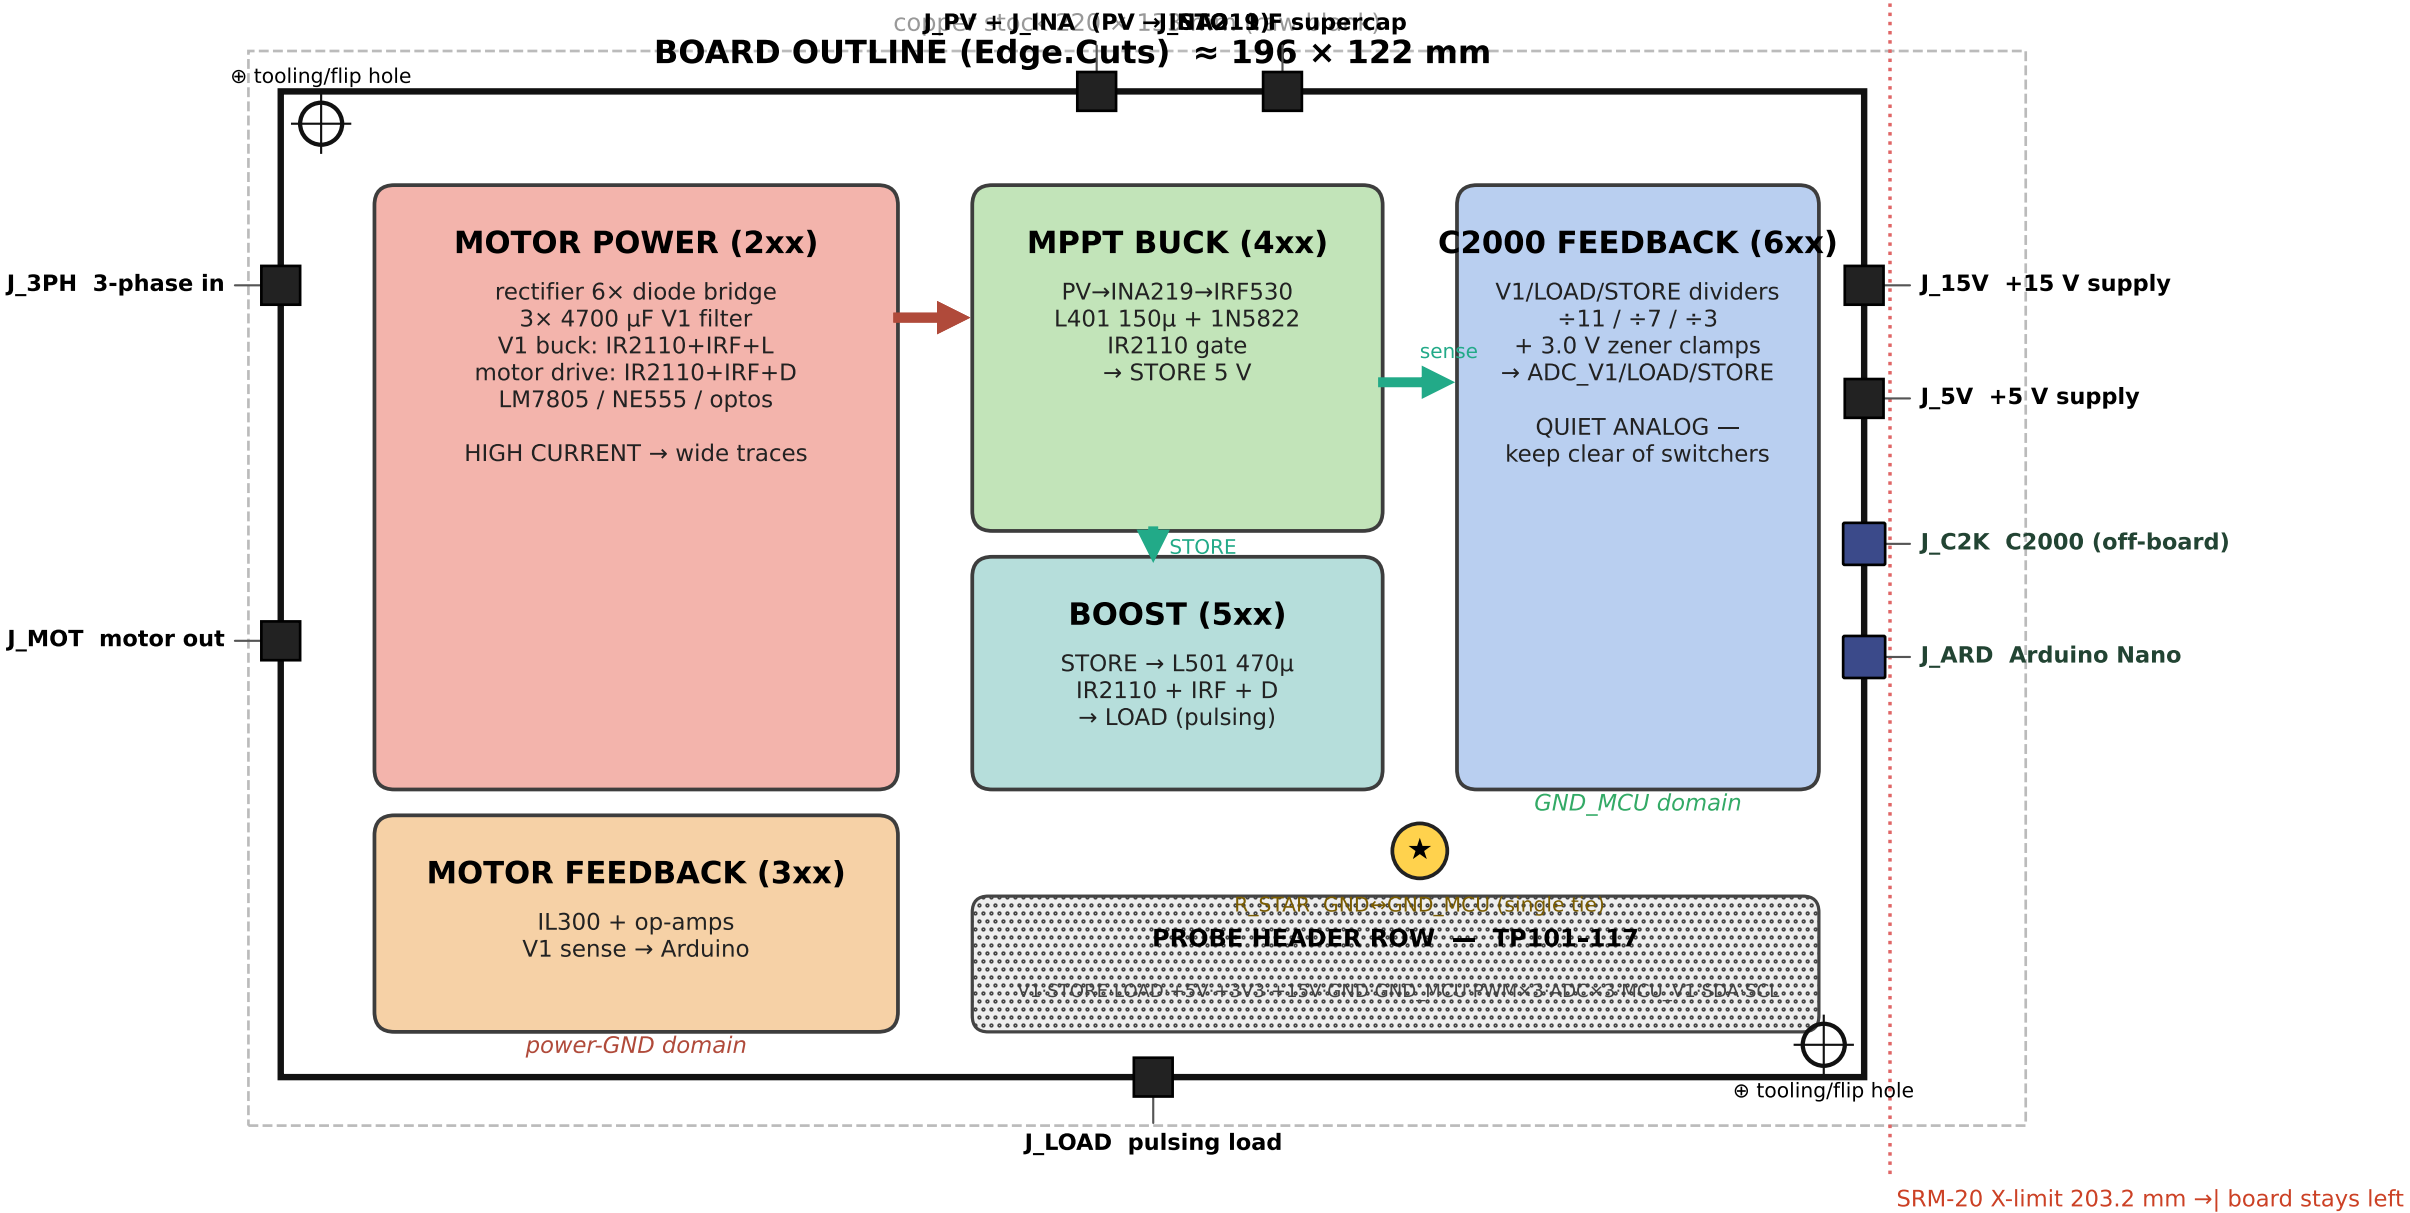

RULES track ≥ 1.0 mm · clearance 0.9–1.0 mm (0.8 mm bit) · hand-stitched vias (GND free, signal vias rare) · pour GND on BOTH layers.
SEPARATION keep MPPT/BOOST/motor switching nodes (L401, L501, IR2110 outputs) away from the C2000 dividers and the MCU headers.
CONNECTORS one per interface (shown). All board-level I/O connectors are deleted — inter-board nets (V1, STORE, +15V, PWM, ADC...) become copper traces.