


Mic in + plug-in power

Stage A $\times 100$ $(1 + 100k/1.01k)$

Stage B $\times 5.6$ $(1 + 46.4k/10k)$


Anti-alias RC + Uno header

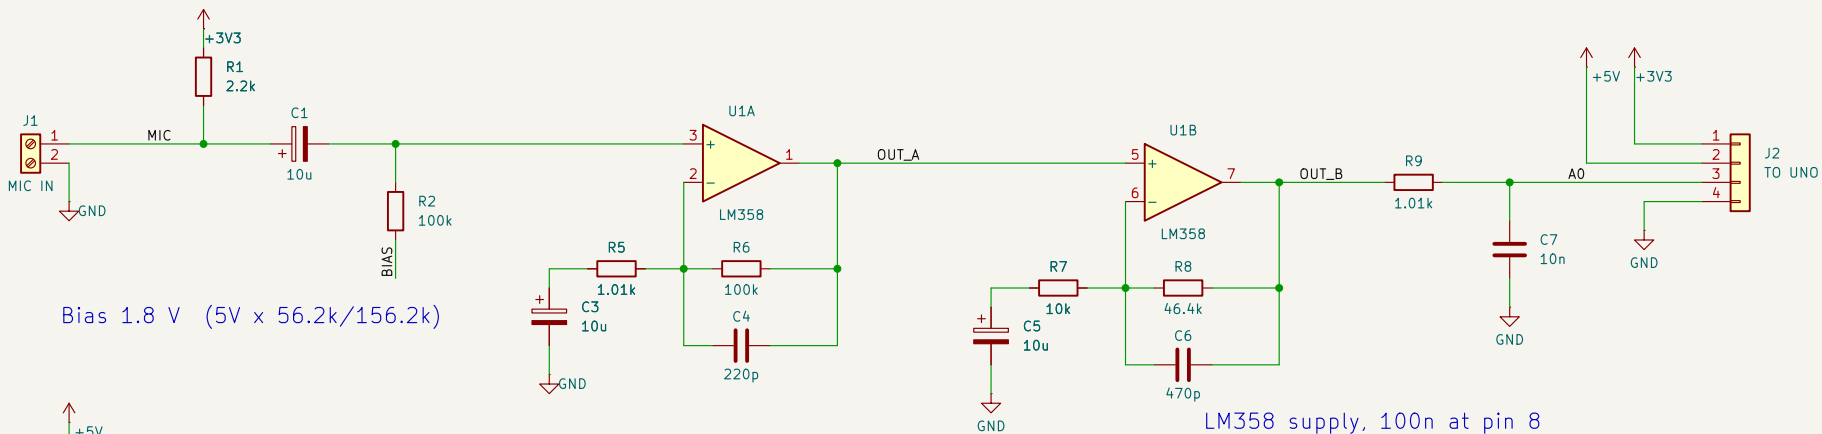

Bias 1.8 V $(5V \times 56.2k/156.2k)$

LM358 supply, 100n at pin 8

Rails come in on J2



Sheet: /		
File: rode-preamp.kicad_sch		
Title: RØDE VideoMic GO preamp for Arduino Uno A0		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.6		Id: 1/1