




A POWER IN +15 V -> LM7812 -> +12 V

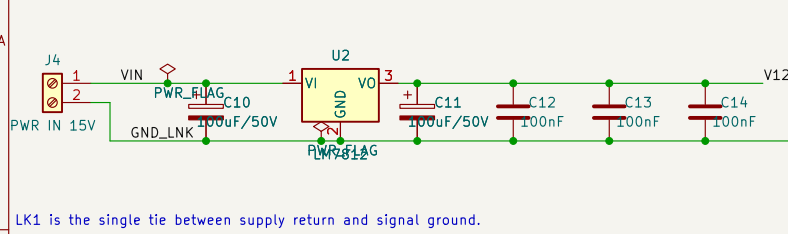

B STATUS LEDS

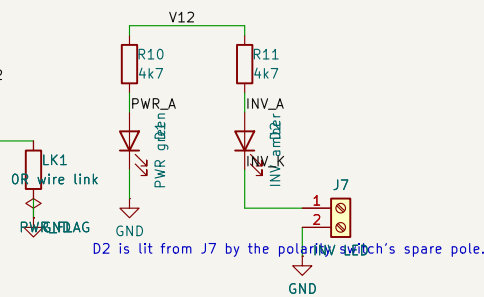


C VIRTUAL GROUND +6 V, buffered

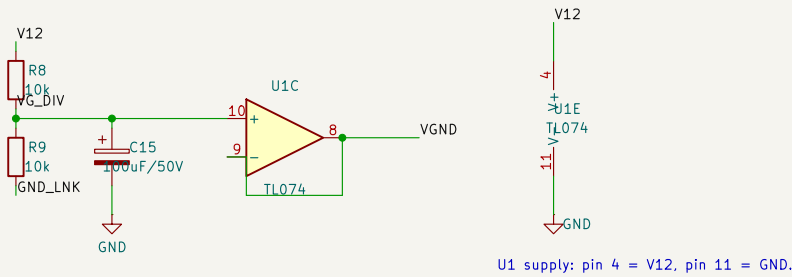

D INPUTS L + R, DC-blocked, summed

E SALLEN-KEY LOW-PASS 2nd order


F POLARITY INVERTER unity gain -1

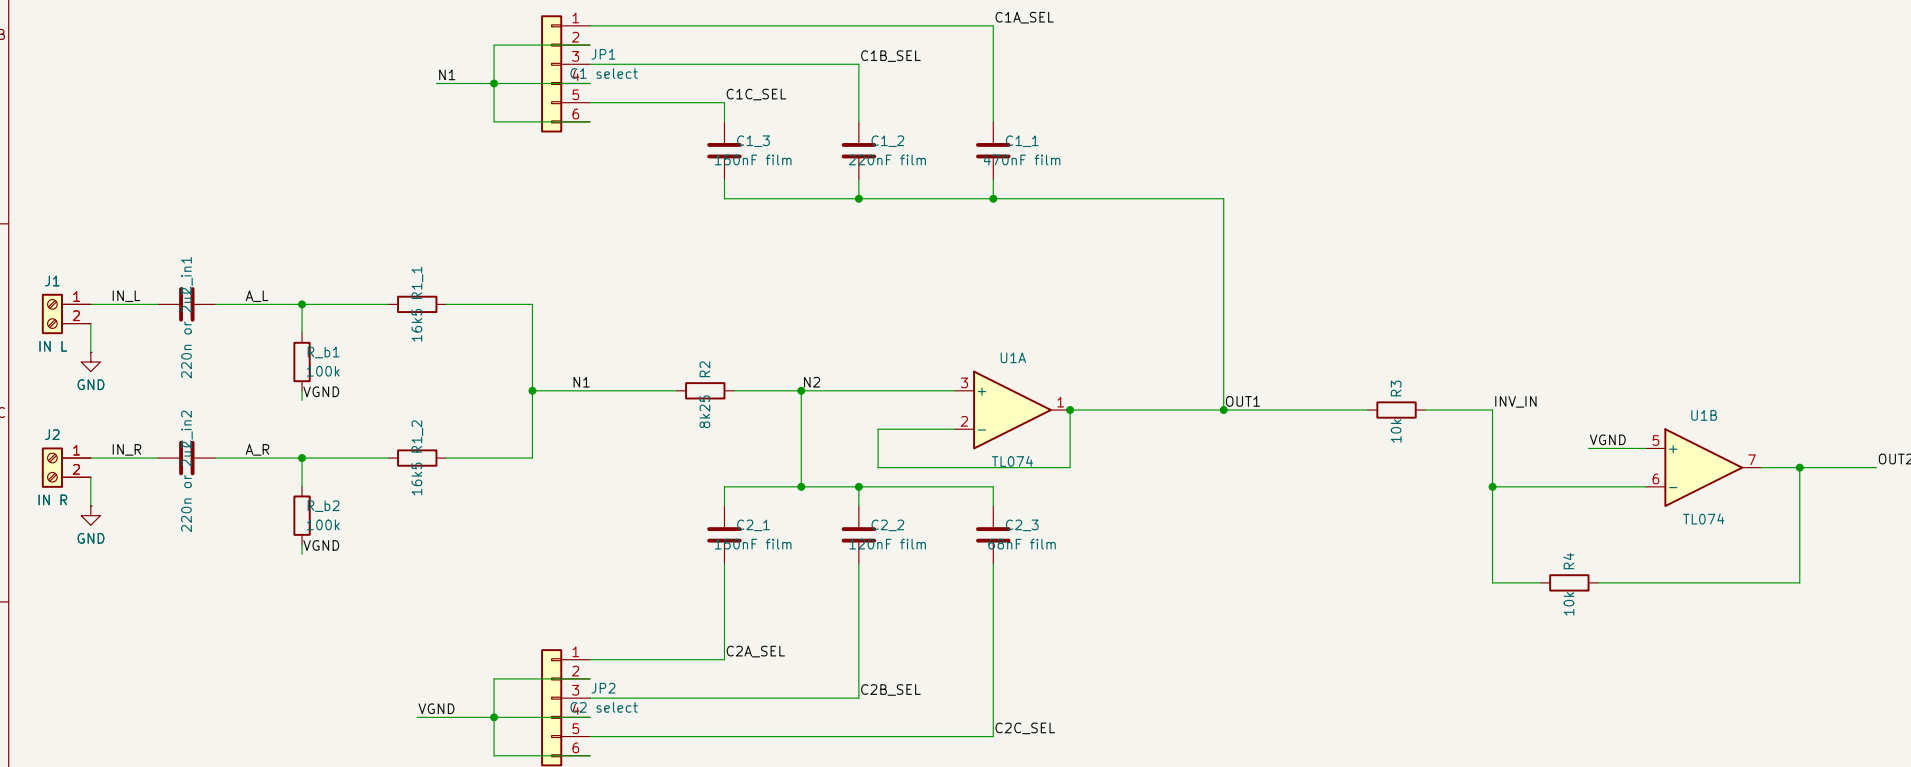

R_b1/R_b2 are the only DC path to U1A's + input -- without them the amp drifts to a rail.


JP1/JP2 select C1 and C2 independently -- nine corners, not three.

G OUTPUT polarity select -> level -> jack

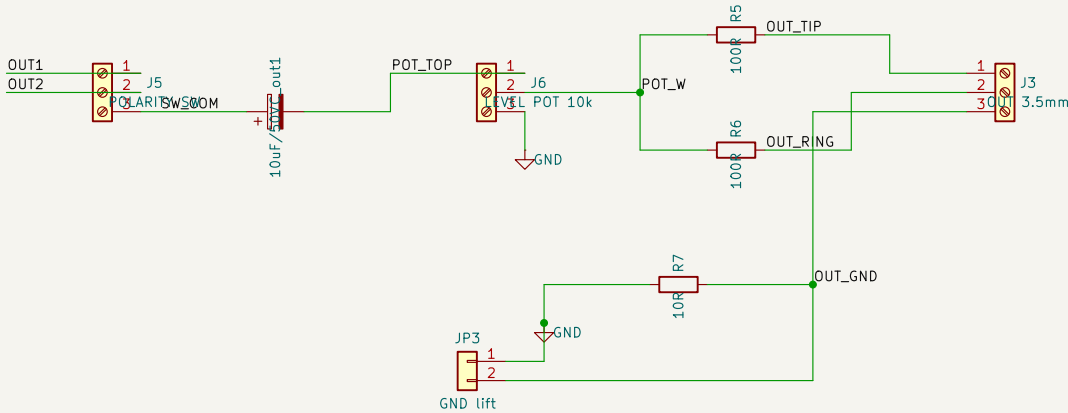

R7 + JP3 let the output shield be damped or lifted at the jack.

H SPARE SECTION tied off, not floating



An unterminated spare section oscillates and couples into its neighbours through the shared supply.