

nice!nano

ADS1220

P1.06

P0.20

P0.17

P0.08

3V3

GND

14

15

16

1

2

3

13

4

5

DRDY

MISO

MOSI

SCLK

CS

CLK

DVDD

DGND

AGND

AIN0

AIN1

AIN2

AIN3

REFN0

REFP0

AVDD

AGND

11

10

7

6

8

9

12

5

x

y

a/2

n/c — leave float

b (to GND)

a (IDAC1 in)


3V3

C_1 100 nF


C_2 100 nF

pin order as on the module; AGND = AVSS (pin 5), one net, drawn on both sides; MISO = DOUT (15), MOSI = DIN (16).
 SPI mode 1; CS and CLK tied to GND (internal oscillator, no `cs-gpios` in devicetree); $C_1/C_2 = 100$ nF on 3V3;
 sensor-side nets (x, y, a/2, a, b) in figure 2

ADS1220

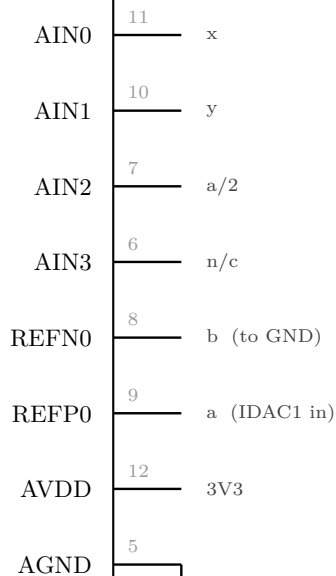

TrackPoint (4-wire)

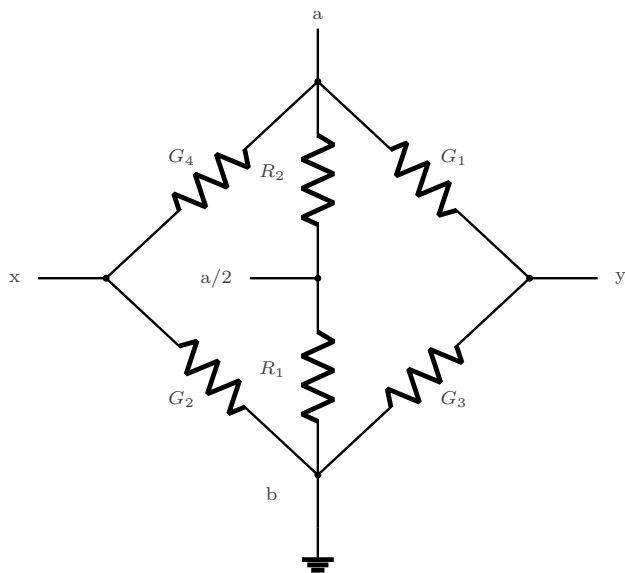

right-side pins in module order; left column in figure 1. Symbols join by matching labels.
 Two half-bridges share a/b; x, y = taps; AIN3 must float. Excitation IDAC1 enters at a, returns via b to GND.
 $R_1 = R_2 = 10\text{ k}$ matched $\Rightarrow$ AIN2 = a/2 $\Rightarrow$ differential input ≈ 0 at rest.