

PC0

Physical Config Desktop Programming Attributes

Command Prompt


```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.10.10.3

Pinging 10.10.10.3 with 32 bytes of data:

Reply from 10.10.10.3: bytes=32 time<1ms TTL=128
Reply from 10.10.10.3: bytes=32 time<1ms TTL=128
Reply from 10.10.10.3: bytes=32 time<1ms TTL=128
Reply from 10.10.10.3: bytes=32 time<1ms TTL=128

Ping statistics for 10.10.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

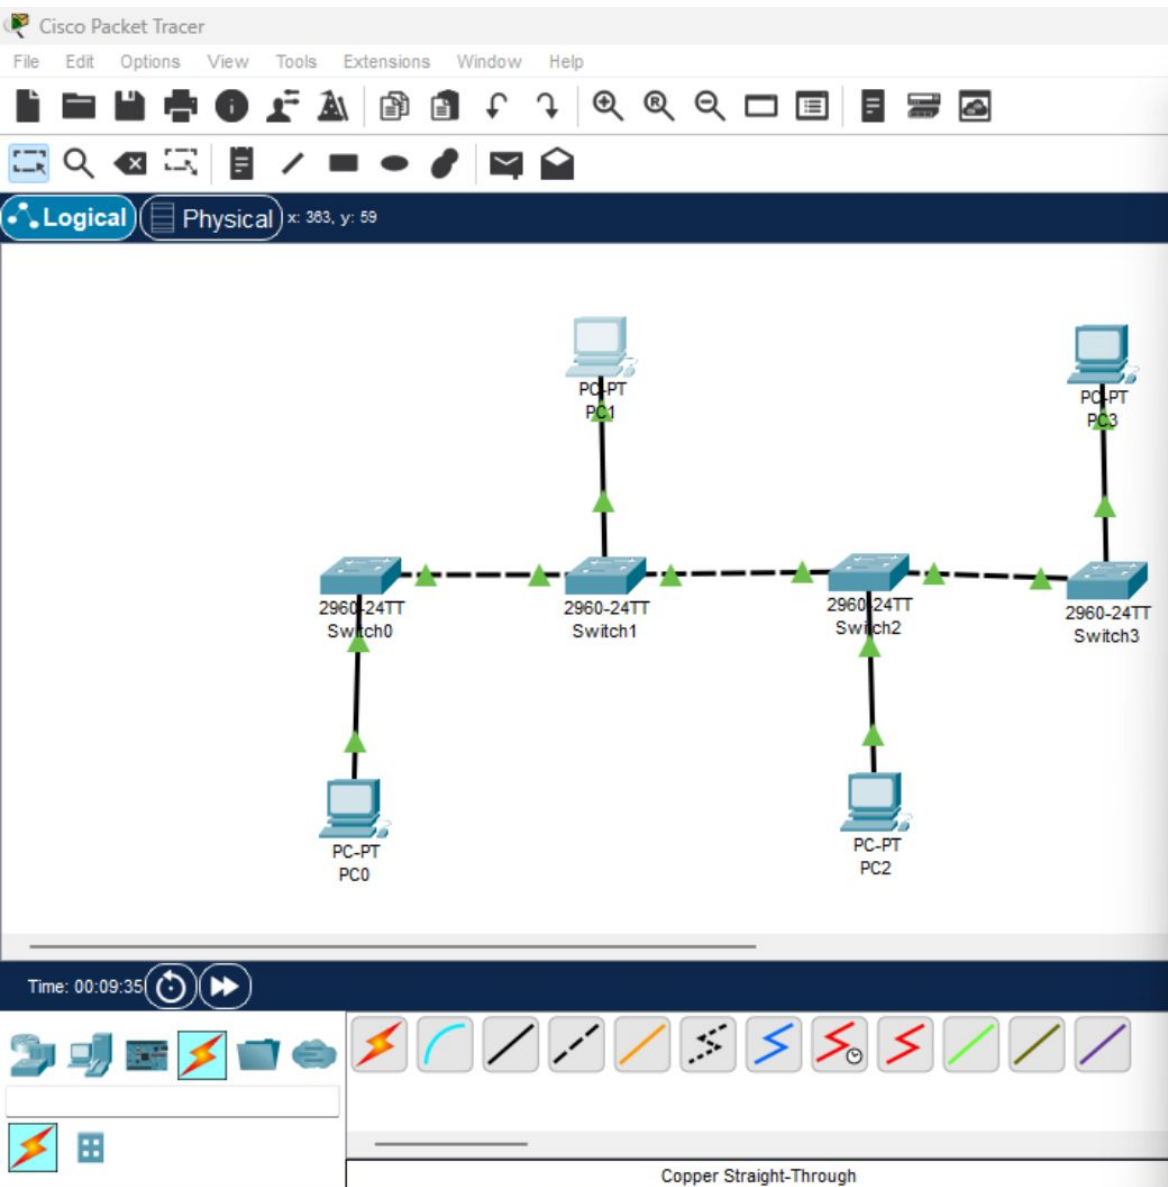

PC1

Physical Config Desktop Programming Attributes

Command Prompt


```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.10.10.1

Pinging 10.10.10.1 with 32 bytes of data:

Reply from 10.10.10.1: bytes=32 time<1ms TTL=128
Reply from 10.10.10.1: bytes=32 time<1ms TTL=128
Reply from 10.10.10.1: bytes=32 time<1ms TTL=128
Reply from 10.10.10.1: bytes=32 time<1ms TTL=128

Ping statistics for 10.10.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

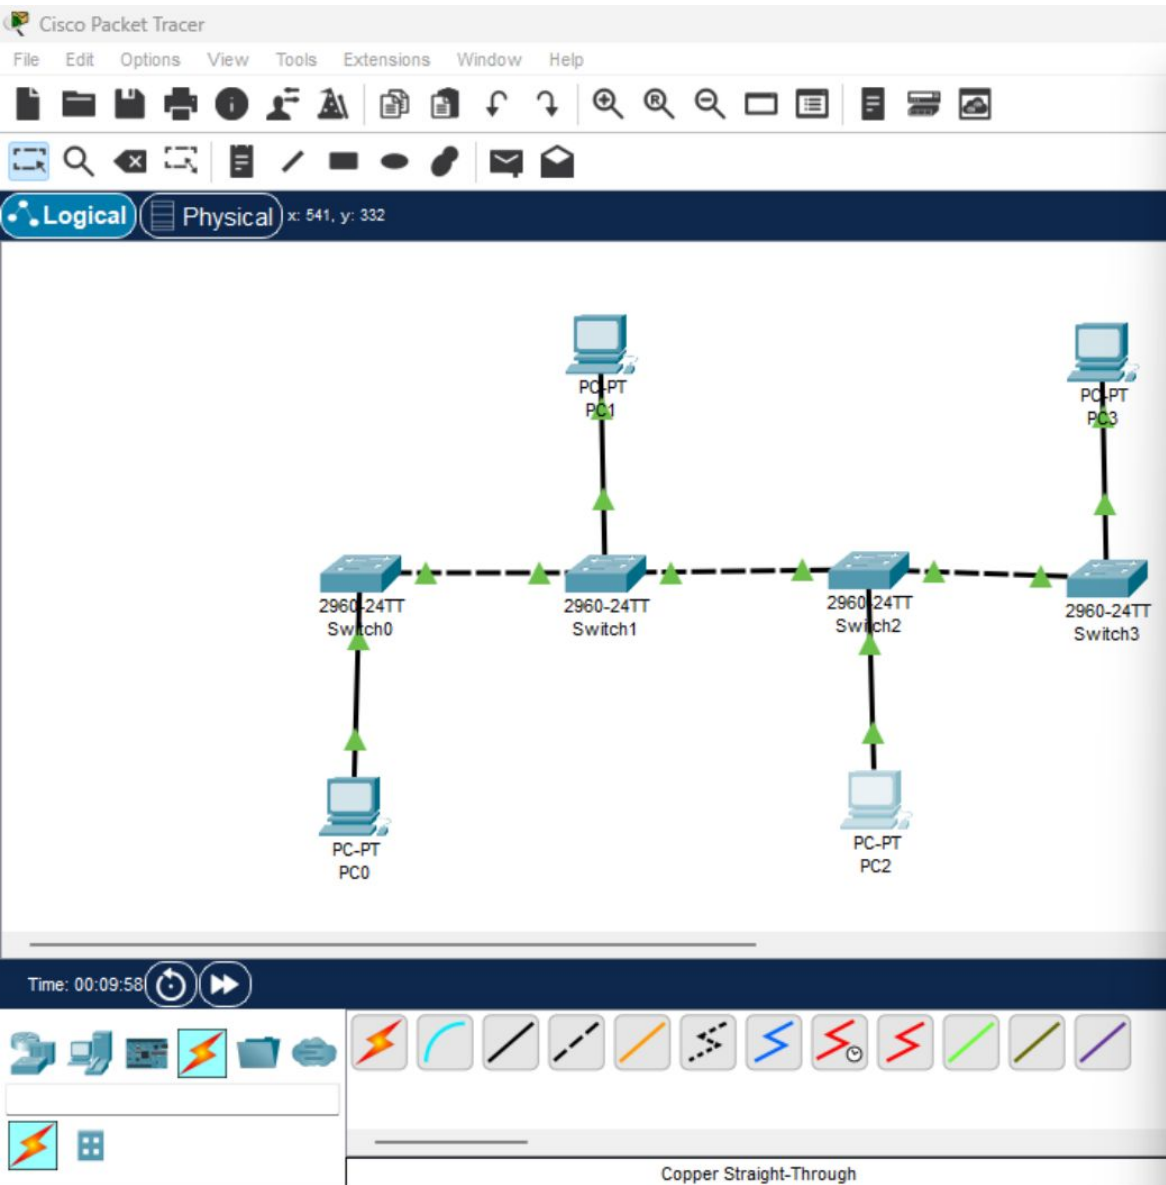

PC2

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.10.10.2

Pinging 10.10.10.2 with 32 bytes of data:

Reply from 10.10.10.2: bytes=32 time<1ms TTL=128
Reply from 10.10.10.2: bytes=32 time<1ms TTL=128
Reply from 10.10.10.2: bytes=32 time<1ms TTL=128
Reply from 10.10.10.2: bytes=32 time=1ms TTL=128

Ping statistics for 10.10.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

