

Experiment-7

Aim

To design and configure **2 subnets** from the given network 192.168.10.0/25.

Procedure

1. Network: 192.168.10.0/25 → split into 2 subnets
2. New subnet mask: /26 (255.255.255.192)


Subnet 1

- Network ID: 192.168.10.0/26
- Usable IPs: 192.168.10.1 – 192.168.10.62

Subnet 2

- Network ID: 192.168.10.64/26
- Usable IPs: 192.168.10.65 – 192.168.10.126
- Assign at least 3 IPs per subnet
- Configure IP & subnet mask on each device
- Connect using router/switch
- Test with ping (PDU)

Output

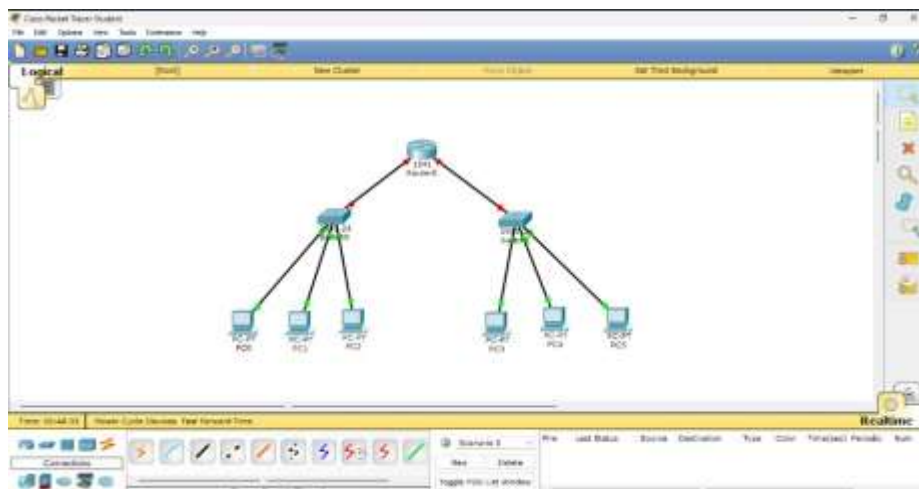

Observation

1. Network split into two equal subnets
2. Each subnet supports 3+ devices
3. Same-subnet communication is direct
4. Inter-subnet communication needs routing
5. PDU (ping) confirms successful transmission

Result

Thus, Subnets are successfully created and configured.