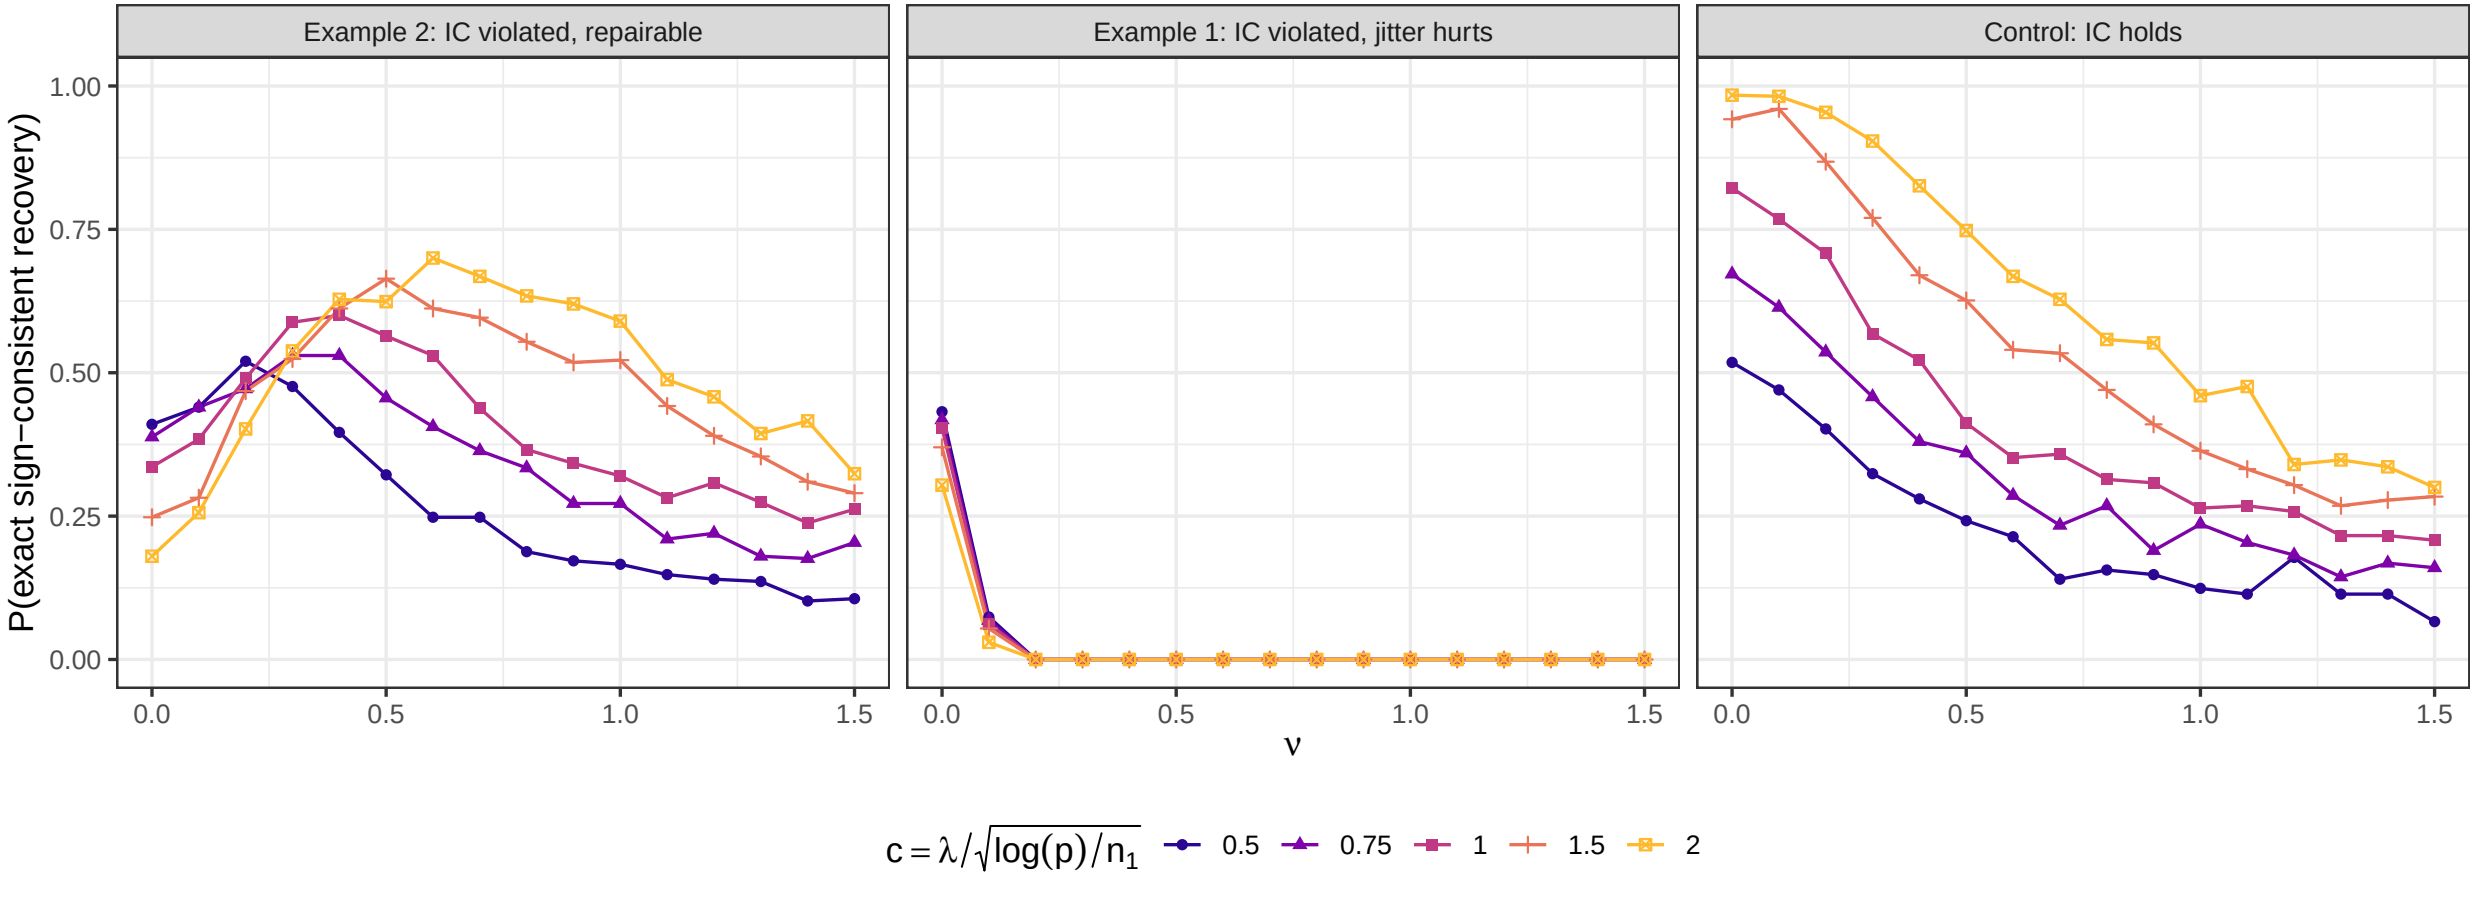
Example 2: IC violated, repairable
Example 1: IC violated, jitter hurts
Control: IC holds
P(exact sign−consistent recovery)
1.00
0.75
0.50
0.25
0.00
0.0
0.5
1.0
1.5
ν
$c = \lambda/\sqrt{\log(p)/n_1}$
0.5
0.75
1
1.5
2