WAFER PROBE TEST REPORT

Final electrical sort - Product family LX-40 Low-Dropout Regulator

Lot ID L-5521-A
Wafer ID W-13
Product LX-40-33
Test Program ..... LX40_FS_v7.tp
Probe Card PC-0871
Tester ..... T-2000 #4

Operator op-117
Test Temp. ..... 85 °C
Start Time 03/22/2025 14:05
End Time 03/22/2025 15:51
Diameter ..... 200 mm
Notch ..... 270°

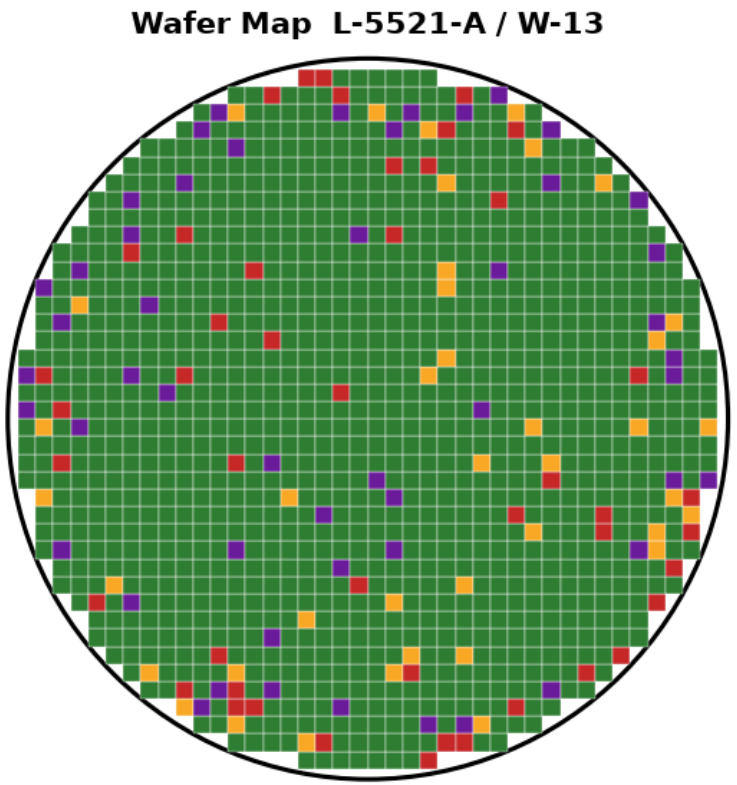

Yield: 91.3 % Good die: 1,204 / 1,319 Edge exclusion: 3 mm

Bin Summary

Bin	Description	Count	%
1	Pass - all parameters	1204	91.28
7	Fail - VOUT out of range	52	3.94
9	Fail - Dropout voltage	31	2.35
12	Fail - Quiescent current	19	1.44
15	Fail - Open/short	13	0.99
	Total tested	**1319**	**100.00**

Disposition

Wafer released to assembly. Bins 7 and 9 clustered at wafer edge (see map), consistent with known implant non-uniformity. No action required. Inked die: 0 (electronic map only).

Parametric Results by Test Site (sample of 30 die)

Die X	Die Y	Site	VOUT [V]	VDROP [mV]	IQ [µA]	Line Reg. [%/V]	Load Reg. [%]	PSRR [dB]	Bin
10	13	1	3.303	217	41.9	0.014	0.38	67.4	1
15	10	2	3.299	210	42.1	0.008	0.42	66.8	1
1	11	3	3.308	205	39.0	0.024	0.31	68.1	1
10	-16	4	3.296	191	40.6	0.024	0.32	69.5	1
-14	7	1	3.290	190	39.9	0.030	0.38	67.7	1
-9	-3	2	3.315	209	39.7	0.030	0.29	68.4	1
10	-14	3	3.306	218	44.5	0.032	0.39	67.0	1
5	-15	4	3.304	196	39.4	0.015	0.24	68.7	1
14	8	1	3.306	200	41.9	0.027	0.37	67.8	1
11	-3	2	3.300	226	42.1	0.034	0.47	69.1	1
4	13	3	3.297	226	40.7	0.016	0.35	72.0	1
-6	5	4	3.277	214	43.0	0.025	0.35	68.5	1
-9	-13	1	3.312	210	43.3	0.016	0.42	68.4	1
-10	6	2	3.301	197	40.5	0.025	0.38	69.3	1
4	-16	3	3.297	211	46.7	0.019	0.27	68.0	1
-7	-4	4	3.299	210	39.4	0.022	0.34	68.9	1
-15	-11	1	3.288	204	46.0	0.009	0.40	67.9	1
17	10	2	3.295	214	42.8	0.032	0.34	68.3	1
17	-7	3	3.303	200	41.6	0.022	0.38	66.6	1
-17	12	4	3.313	203	42.3	0.018	0.27	67.8	1
-3	-4	1	3.321	187	40.5	0.023	0.32	64.7	1
-9	7	2	3.301	199	39.4	0.016	0.36	67.6	1
-10	-12	3	3.303	222	40.3	0.029	0.35	68.8	1
-9	10	4	3.305	212	36.2	0.014	0.39	66.3	1
4	-18	1	3.280	202	45.6	0.021	0.30	66.9	1
9	17	2	3.304	206	43.5	0.024	0.33	66.4	1
9	-11	3	3.294	209	45.1	0.014	0.37	66.2	1
-3	-10	4	3.308	214	40.3	0.015	0.40	67.5	1
-12	-17	1	3.286	238	46.2	0.022	0.45	68.5	1
17	14	2	3.305	226	39.0	0.027	0.40	70.1	1
		Limits	*3.267-3.333*	*<= 250*	*<= 50*	*<= 0.05*	*<= 0.6*	*>= 60*	