WAFER PROBE TEST REPORT

Final electrical sort - Product family LX-40 Low-Dropout Regulator

Lot ID L-5521-A
Wafer ID W-14
Product LX-40-33
Test Program ..... LX40_FS_v7.tp
Probe Card PC-0871
Tester ..... T-2000 #4

Operator op-117
Test Temp. ..... 85 °C
Start Time 03/22/2025 16:12
End Time 03/22/2025 17:58
Diameter ..... 200 mm
Notch ..... 270°

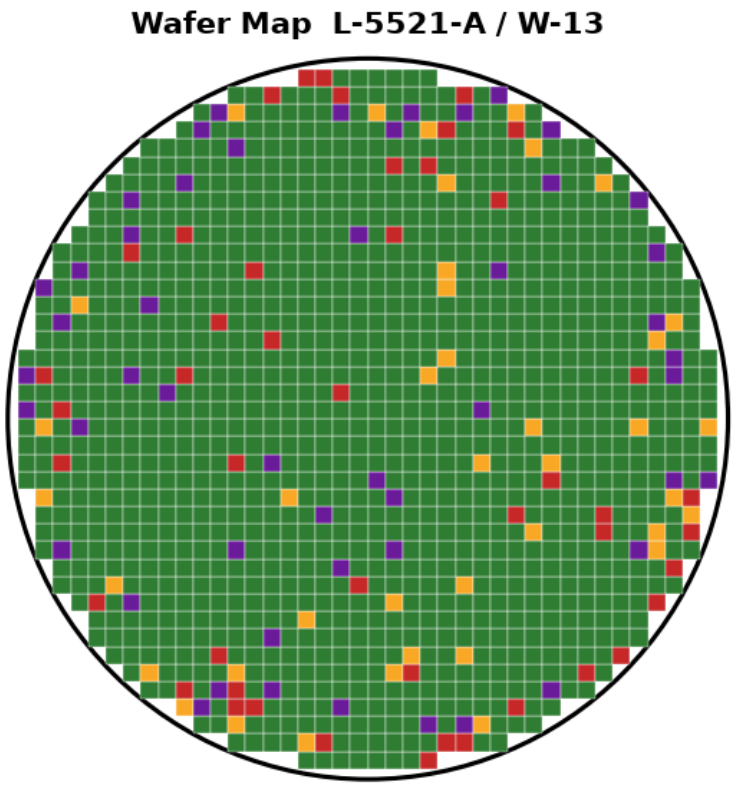

Yield: 91.3 % Good die: 1,204 / 1,319 Edge exclusion: 3 mm

Bin Summary

Bin	Description	Count	%
1	Pass - all parameters	1205	91.77
7	Fail - VOUT out of range	48	3.66
9	Fail - Dropout voltage	27	2.06
12	Fail - Quiescent current	22	1.68
15	Fail - Open/short	11	0.84
	Total tested	**1313**	**100.00**

Disposition

Wafer released to assembly. Bins 7 and 9 clustered at wafer edge (see map), consistent with known implant non-uniformity. No action required. Inked die: 0 (electronic map only).

Parametric Results by Test Site (sample of 30 die)

Die X	Die Y	Site	VOUT [V]	VDROP [mV]	IQ [µA]	Line Reg. [%/V]	Load Reg. [%]	PSRR [dB]	Bin
10	13	1	3.289	219	47.2	0.016	0.47	66.0	1
15	10	2	3.290	232	36.9	0.022	0.33	67.7	1
1	11	3	3.306	193	39.1	0.018	0.35	70.4	1
10	-16	4	3.294	209	45.6	0.028	0.40	65.2	1
-14	7	1	3.287	196	36.1	0.010	0.27	68.7	1
-9	-3	2	3.296	187	37.0	0.014	0.36	67.2	1
10	-14	3	3.310	224	37.1	0.028	0.45	71.0	1
5	-15	4	3.299	223	43.0	0.028	0.35	65.4	1
14	8	1	3.315	218	44.0	0.016	0.38	68.9	1
11	-3	2	3.310	217	45.5	0.024	0.32	64.8	1
4	13	3	3.302	203	37.4	0.013	0.47	67.3	1
-6	5	4	3.296	229	42.3	0.010	0.37	67.8	1
-9	-13	1	3.296	215	39.7	0.022	0.37	67.3	1
-10	6	2	3.290	238	37.1	0.023	0.36	65.9	1
4	-16	3	3.314	190	42.8	0.023	0.46	66.1	1
-7	-4	4	3.284	214	36.2	0.030	0.36	71.5	1
-15	-11	1	3.293	222	40.4	0.023	0.32	66.8	1
17	10	2	3.304	219	38.2	0.028	0.41	67.7	1
17	-7	3	3.300	188	38.3	0.008	0.24	68.6	1
-17	12	4	3.309	204	42.2	0.033	0.35	71.8	1
-3	-4	1	3.317	235	38.4	0.015	0.32	70.9	1
-9	7	2	3.315	202	38.2	0.014	0.43	69.4	1
-10	-12	3	3.293	209	36.4	0.027	0.47	71.4	1
-9	10	4	3.313	234	37.9	0.028	0.30	66.9	1
4	-18	1	3.283	220	42.6	0.018	0.39	71.2	1
9	17	2	3.315	225	36.4	0.028	0.37	67.7	1
9	-11	3	3.296	192	37.5	0.009	0.46	71.3	1
-3	-10	4	3.306	199	39.1	0.022	0.28	68.3	1
-12	-17	1	3.288	202	44.4	0.025	0.37	67.3	1
17	14	2	3.311	214	38.6	0.012	0.47	65.4	1
		Limits	*3.267-3.333*	*<= 250*	*<= 50*	*<= 0.05*	*<= 0.6*	*>= 60*	