WAFER PROBE TEST REPORT

Final electrical sort - Product family LX-40 Low-Dropout Regulator

Lot ID L-5534-B
Wafer ID W-03
Product LX-40-50
Test Program ..... LX40_FS_v7.tp
Probe Card PC-0904
Tester ..... T-2000 #2

Operator op-117
Test Temp. ..... 25 °C
Start Time 04/02/2025 11:52
End Time 04/02/2025 13:40
Diameter ..... 200 mm
Notch ..... 270°

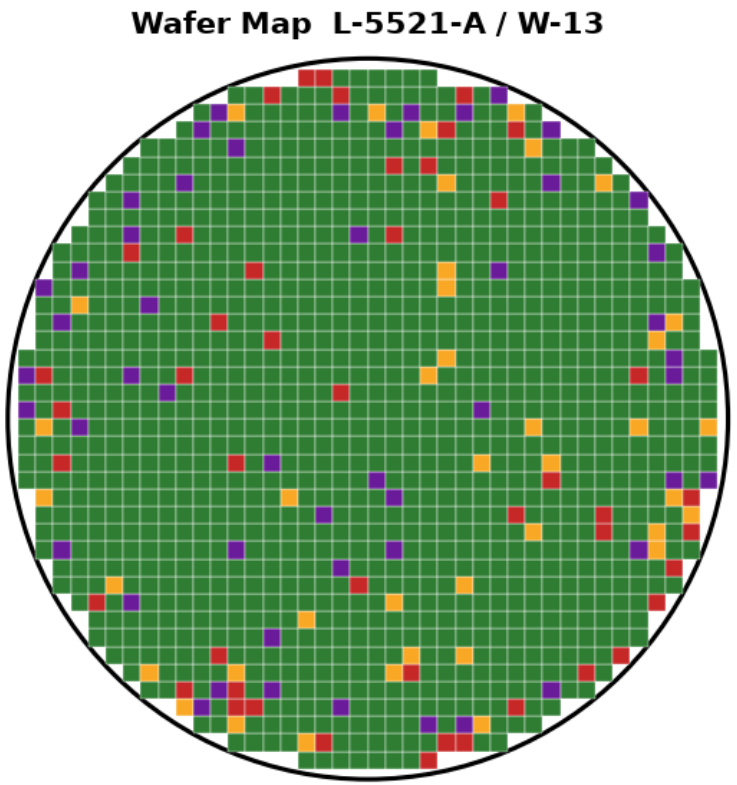

Yield: 91.3 % Good die: 1,204 / 1,319 Edge exclusion: 3 mm

Bin Summary

Bin	Description	Count	%
1	Pass - all parameters	1217	92.41
7	Fail - VOUT out of range	44	3.34
9	Fail - Dropout voltage	19	1.44
12	Fail - Quiescent current	21	1.59
15	Fail - Open/short	16	1.21
	Total tested	**1317**	**100.00**

Disposition

Wafer released to assembly. Bins 7 and 9 clustered at wafer edge (see map), consistent with known implant non-uniformity. No action required. Inked die: 0 (electronic map only).

Parametric Results by Test Site (sample of 30 die)

Die X	Die Y	Site	VOUT [V]	VDROP [mV]	IQ [µA]	Line Reg. [%/V]	Load Reg. [%]	PSRR [dB]	Bin
10	13	1	4.996	224	41.6	0.026	0.26	68.8	1
15	10	2	4.997	239	41.6	0.025	0.31	65.5	1
1	11	3	4.998	221	41.7	0.028	0.28	65.8	1
10	-16	4	4.989	195	46.3	0.024	0.36	69.9	1
-14	7	1	4.998	234	47.4	0.009	0.33	70.2	1
-9	-3	2	4.997	238	46.3	0.023	0.43	69.7	1
10	-14	3	5.010	213	40.7	0.033	0.42	67.5	1
5	-15	4	4.990	194	46.5	0.011	0.25	65.1	1
14	8	1	5.005	213	45.3	0.017	0.37	68.0	1
11	-3	2	5.023	210	42.8	0.025	0.42	67.2	1
4	13	3	5.001	187	46.2	0.027	0.45	69.5	1
-6	5	4	5.008	230	46.2	0.025	0.42	68.5	1
-9	-13	1	4.999	239	47.8	0.016	0.33	65.0	1
-10	6	2	4.994	216	46.2	0.023	0.26	66.7	1
4	-16	3	5.018	187	39.5	0.032	0.37	70.9	1
-7	-4	4	5.008	188	43.2	0.032	0.25	67.0	1
-15	-11	1	4.990	203	42.0	0.009	0.33	64.1	1
17	10	2	4.994	192	43.1	0.009	0.30	71.7	1
17	-7	3	4.998	230	36.5	0.018	0.34	66.8	1
-17	12	4	5.007	194	46.7	0.020	0.36	67.6	1
-3	-4	1	4.987	224	44.1	0.011	0.43	71.7	1
-9	7	2	4.998	237	42.0	0.021	0.44	69.7	1
-10	-12	3	5.001	202	42.2	0.025	0.34	64.1	1
-9	10	4	5.008	212	47.8	0.018	0.24	67.0	1
4	-18	1	4.996	226	43.5	0.022	0.35	69.4	1
9	17	2	4.997	208	43.2	0.016	0.47	67.9	1
9	-11	3	4.981	187	47.5	0.016	0.44	67.6	1
-3	-10	4	4.988	223	43.2	0.013	0.35	65.5	1
-12	-17	1	5.001	202	39.6	0.020	0.27	70.1	1
17	14	2	4.983	187	47.6	0.029	0.47	65.0	1
		Limits	*4.950-5.050*	*<= 250*	*<= 50*	*<= 0.05*	*<= 0.6*	*>= 60*	