
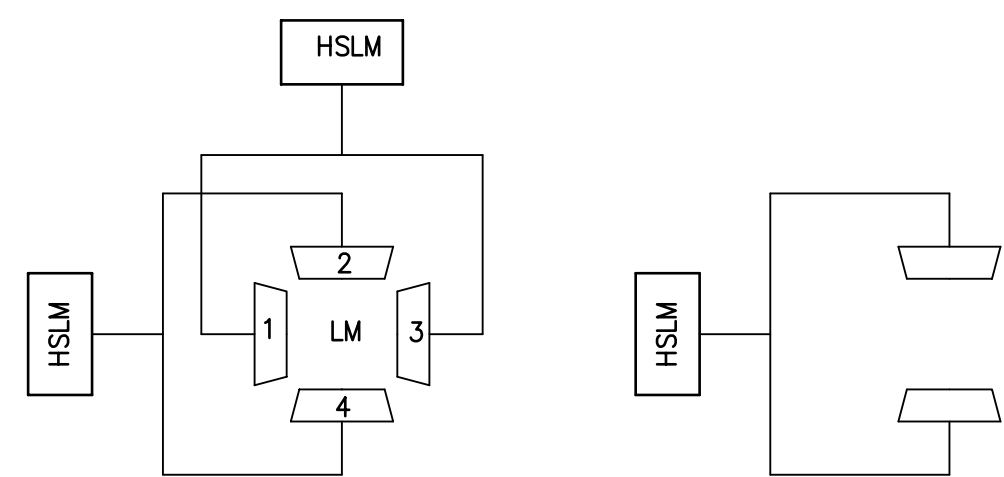


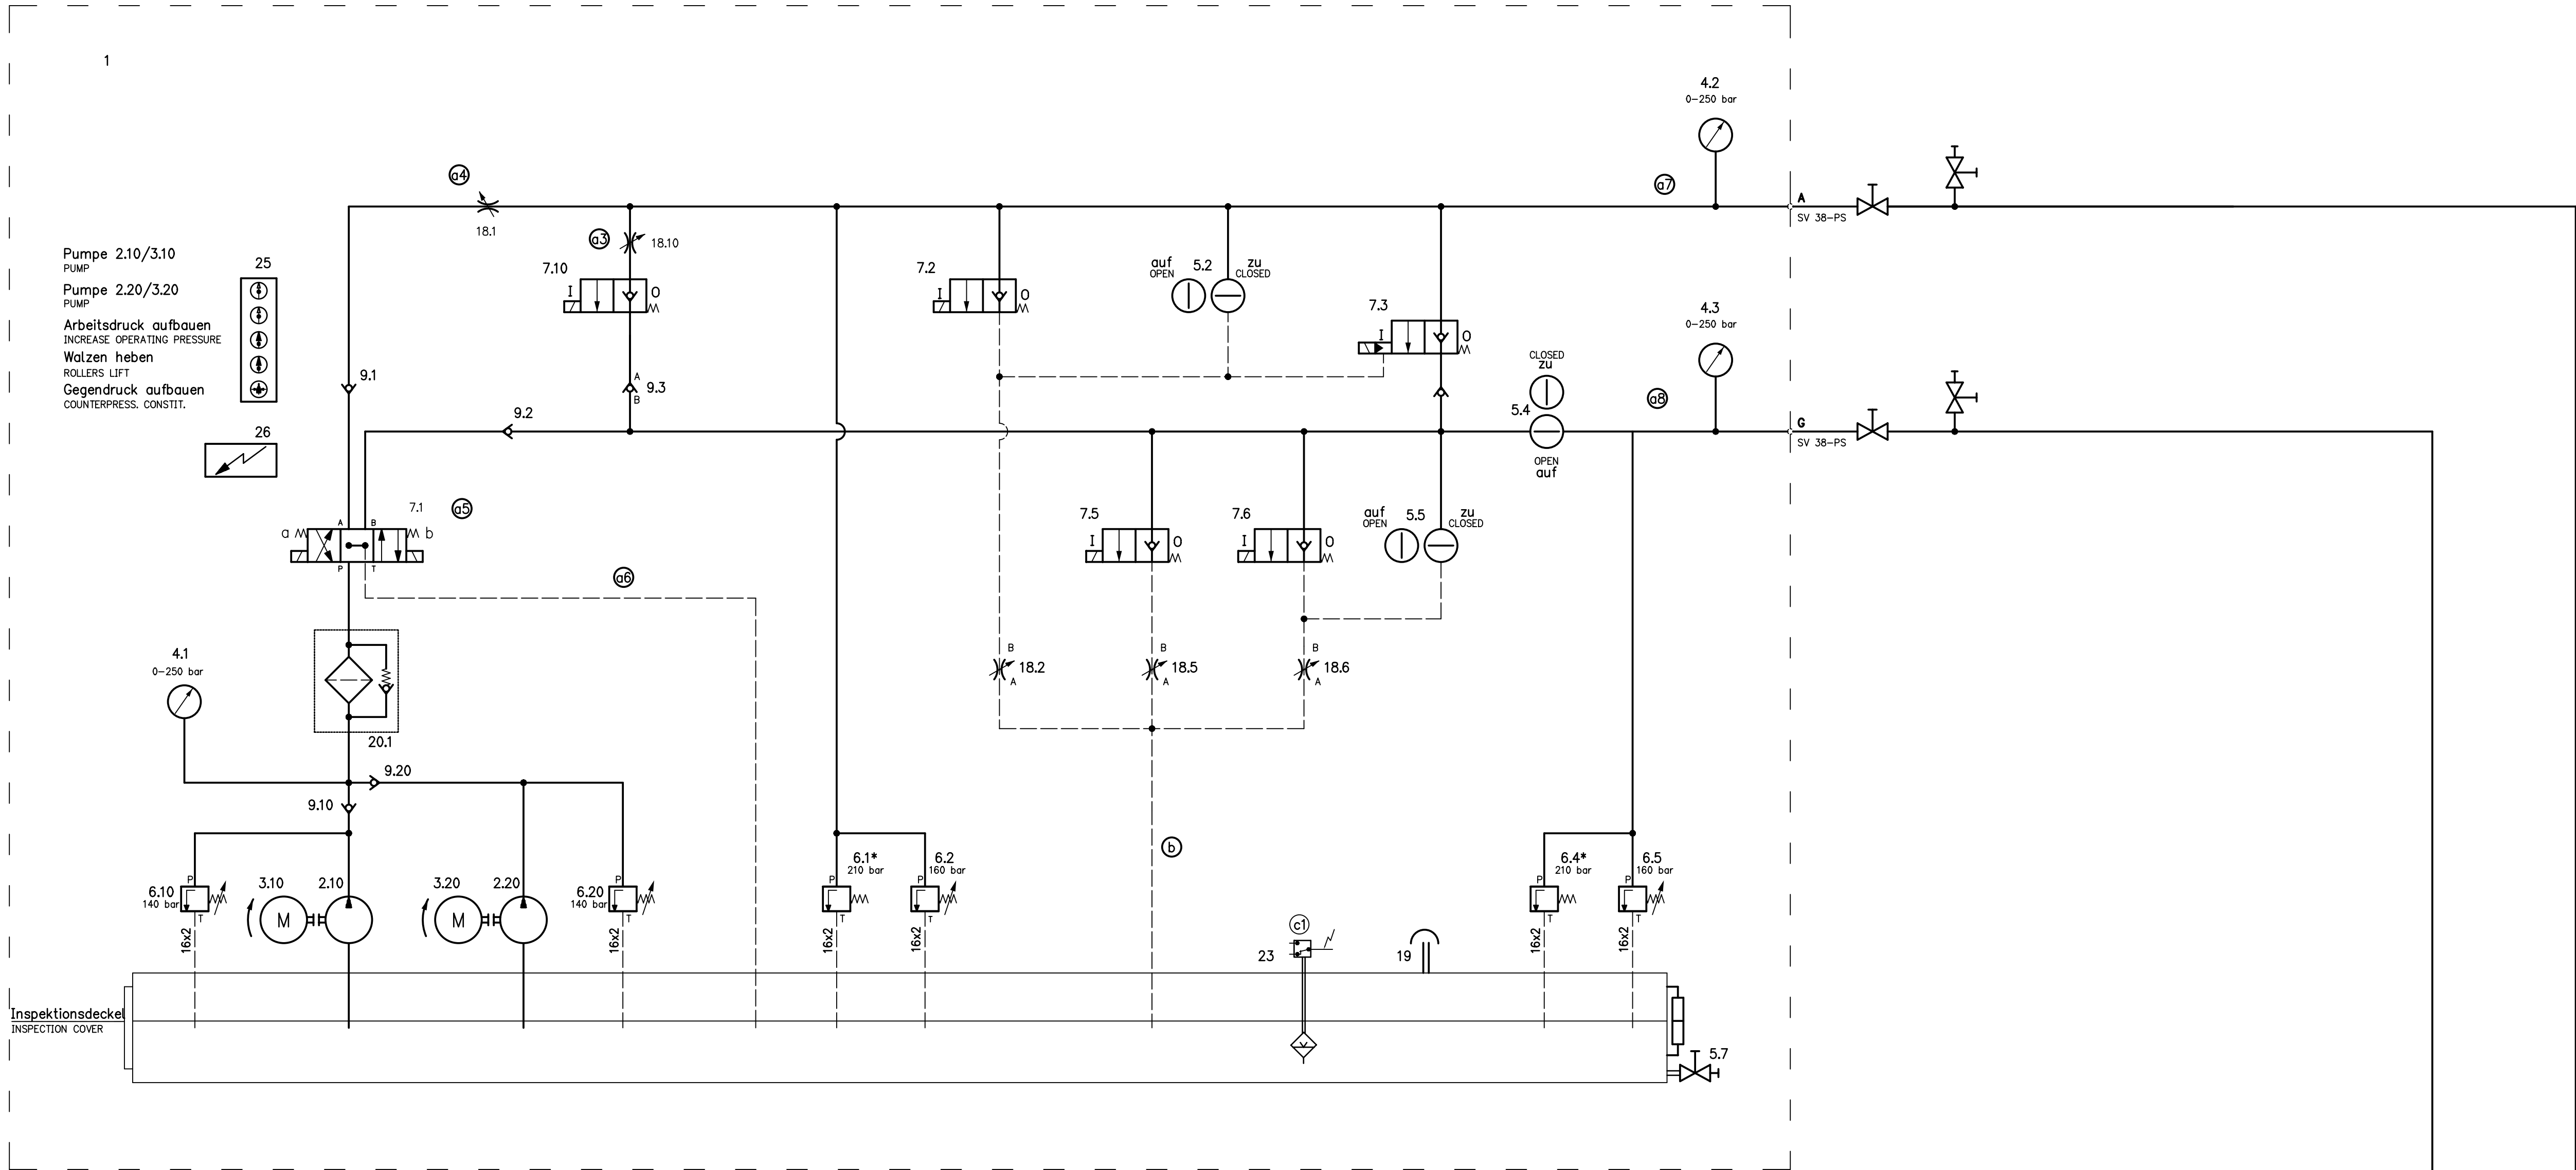

Funktionstabelle	FUNCTION TABLE	Pumpenmotor PUMP MOTOR		Absperrorgan CLOSURE DEVICE			Magnetventile SOLENOID CONTROL VALVES						
		210	220	5.2	5.4	5.5	7.1	7.2	7.3	7.5	7.6	7.10	QS
Normalbetrieb	MILL. IN OPERATION	ON	ON	OPEN	OPEN	OPEN	0	0	0	0	0	0	
Arbeitsdruck steigern	INCREASE OPERATING PRESSURE	RUNNING	ON	CLOSED	OPEN	CLOSED	0	0	0	0	0	0	
Arbeitsdruck mindern	REDUCE OPERATING PRESSURE	ON	ON	CLOSED	OPEN	CLOSED	0	1	0	0	0	0	
		ON	ON	CLOSED	OPEN	CLOSED							
Walzen heben	RAISING ROLLERS	RUNNING	ON	CLOSED	OPEN	CLOSED	a	0	1*	0	0	0	
Walzen oben halten	KEEP ROLLERS IN TOP POSITION	ON	ON	CLOSED	OPEN	CLOSED	0	0	0	0	0	0	
Walzen senken	LOWERING ROLLERS	ON	ON	CLOSED	OPEN	CLOSED	0	0	0	1	1	0	
		ON	ON	CLOSED	OPEN	CLOSED							
Gegendruck steigern	INCREASE COUNTERPRESSURE	ON	ON	CLOSED	OPEN	CLOSED	0	0	0	0	0	1	
Gegendruck mindern	REDUCE COUNTERPRESSURE	ON	ON	CLOSED	OPEN	CLOSED	0	0	0	1	0	0	
		ON	ON	CLOSED	OPEN	CLOSED							
Nebenstromfilter	PARTIAL FLOW FILTER	ON	RUNNING	CLOSED	OPEN	CLOSED		0	0	0	0	0	
Servicebetrieb	SERVICE												
Fülldruckprüfung im Speicher	NITROGEN PRESSURE TEST IN ACCUMUL.	ON	ON	CLOSED	CLOSED	CLOSED	0	0	0	0	0	0	
Walzen oben halten b. Service.	KEEP ROLLERS IN TOP POS. FOR SERVICE	ON	ON	CLOSED	CLOSED	CLOSED	0	0	0	0	0	0	
		ON	ON	CLOSED	CLOSED	CLOSED							

31			
30			
29			
28			
27			
26	Klemmenkasten	TERMINAL BOX	
25	Drucktasterkombination	PUSH-BUTTON COMBINATION	
24			
23	Niveauschalter	LEVEL SWITCH	
22			
21			
20	Filter	FILTER	
19	Entlüftungslutzen mit Entlüftung	FILTER WITH AIR VENT	
18	Drosselventil	THROTTLE VALVE	
17			
16			
15			
14			
13			
12			
11	Meßumformer (mit integrierter Drossel)	MEASURING TRANSMITTER (WITH THROTTLE)	
10			
9	Rückschlagventil	CHECK VALVE	
8			
7	Magnetsteuerventil	SOLENOID CONTROL VALVE	
6	Sicherheitsventil (* baumustergepr./plombiert)	SAFETY VALVE (* LICENSE/LEAD SEALED)	
5	Absperrrorgan	CLOSURE DEVICE	
4	Manometer	PRESSURE GAUGE	
3	Elektromotor	ELECTRIC MOTOR	
2	Hydraulikpumpe	HYDRAULIC OIL PUMP	
1	Hydraulikschrank mit Ölstandanzeige	HYDRAULIC OIL CABINET WITH OIL LEVEL IND.	
Allgemeine Toleranzen nach GENERAL TOLERANCES ACC TO Bremschritte nach ISO 1218 ACC TO Flansche nach ISO 9013 - 332 ACC TO Schweißkonstruktion nach WELDED CONSTRUCTION ACC TO EN 13920 - B EN 29692 / DIN 2559 DDE PREPARATION FOR WELDING ACC TO Schweißverbindungen nach FUSION WELDED ACC TO ISO 5817 - C			
Werkstückkonten nach COMPONENT EDGES ACC TO ISO 1302 Ra = [µm]		Made IN DIMENSIONS IN mm	Darstellungsmethode PROJECTION METHOD 
Maßstab SCALE 1:1		Gezeichnet DRAWN 07.02.2000 Geprüft CHECKED 15.02.2000	Name / NAME FER GR
SCHAEM:HYDRAULIK HSHEM-1000-1400-/ SCHHE:HYDRAULIC		917665-00-0	
Total / TOTAL BL. / SHEET: 1/1		917665-00-0	