C07 MATLAB schematic transfer
Layout and connectivity extracted independently.
Nearby connections use wires; distant connections use global labels.
Footprints and 3D models are not fabrication–qualified.
Original MATLAB identifiers are stored in component properties.

電源の補足：小さな旗は各供給点へ移設済み

ERC power declarations: verified sources via passive paths.
BAT_AUX: BT1 –> F4 –> F1; VSYS_5V: U11 –> U12 –> D3.
GND: common battery return. Flags are not extra supplies.

Sheet: /
File: C07_Solar.kicad_sch
Title:
Size: A0
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 1/3

WSL3637: I1/I2 = current; E1/E2 = dedicated Kelvin sense.
Do not merge sense traces into the load−current copper.
I/E names follow datasheet p2; footprint mapping is pending.

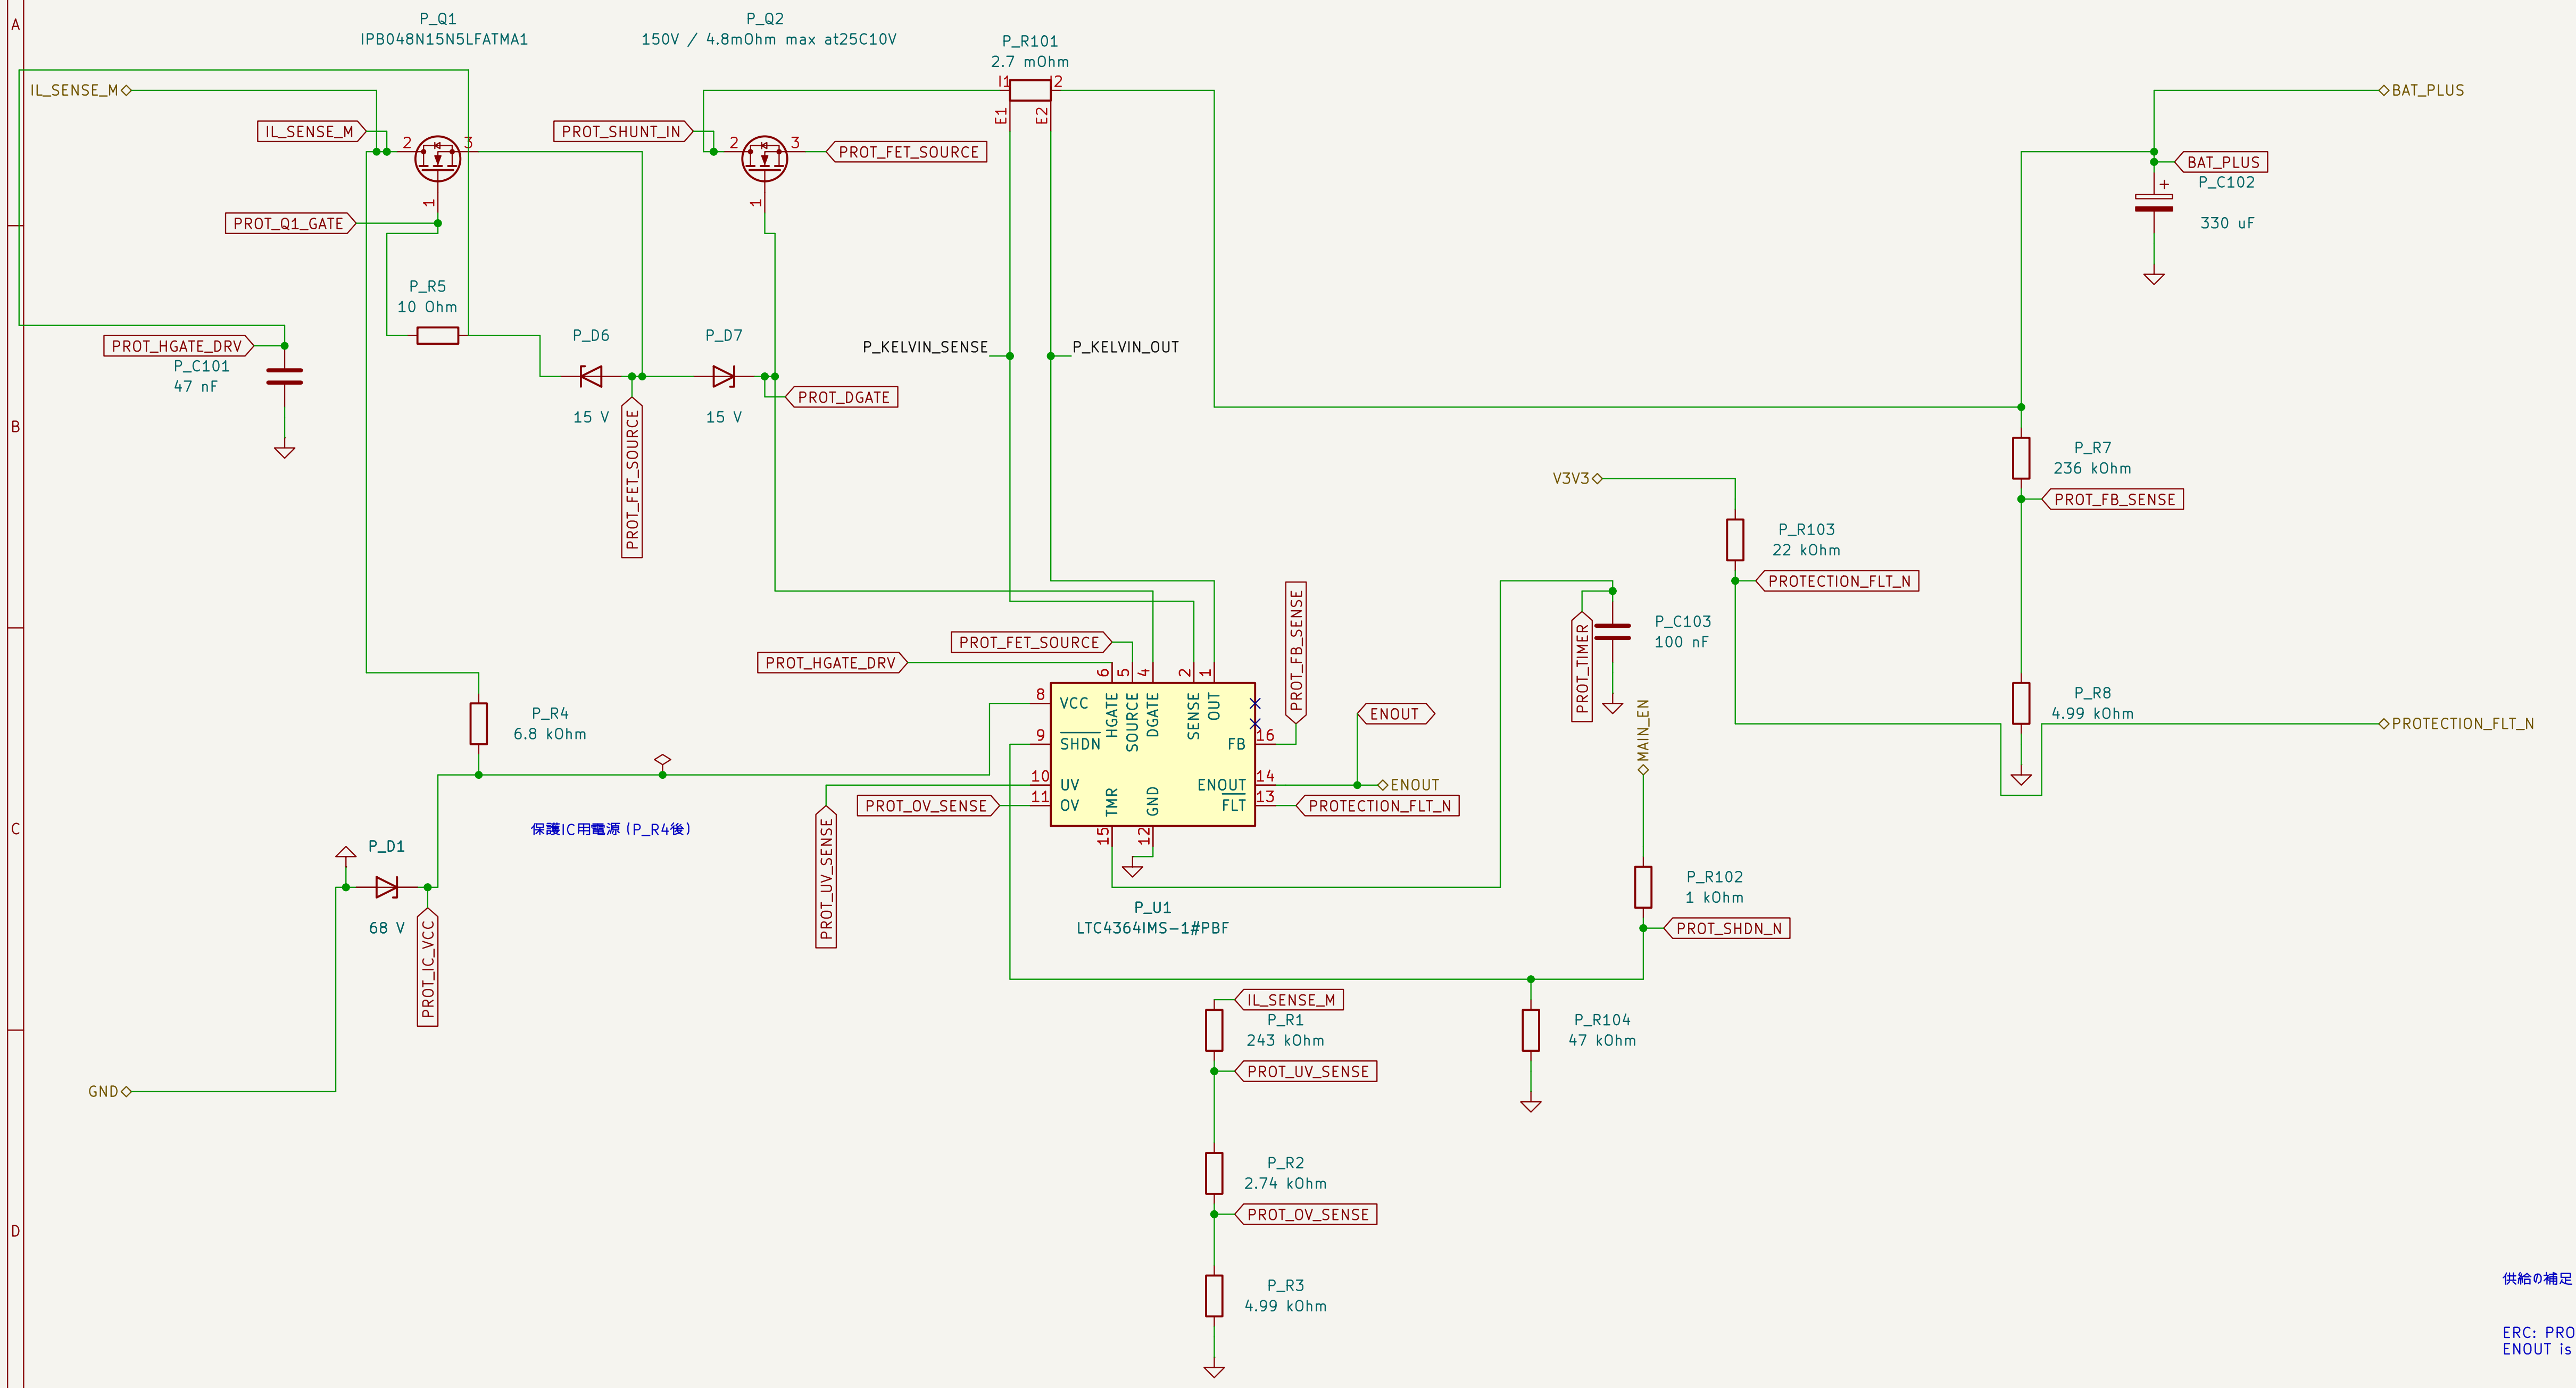

供給の補足：旗はP_R4後の配線上へ移設済み

ERC: PROT_IC_VCC supplied from VIN via P_R4.
ENOUT is unused (LTC4364 datasheet p9).

旧原本についての説明（下記）／現図は4端子へ修正済み
現在のP_R101：I1・I2は主電流、E1・E2は専用検出線。
フットプリントは未確定。ENOUTは未使用。

SOURCE MODEL VIEW − WSL3637 (P_R101) is a two−terminal representation.
Physical part has four terminals; Kelvin wiring and footprint remain unqualified.
ENOUT is left open in the source model.

Sheet: /LTC4364_Protection/
File: LTC4364_Protection.kicad_sch
Title:
Size: A3
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 2/3

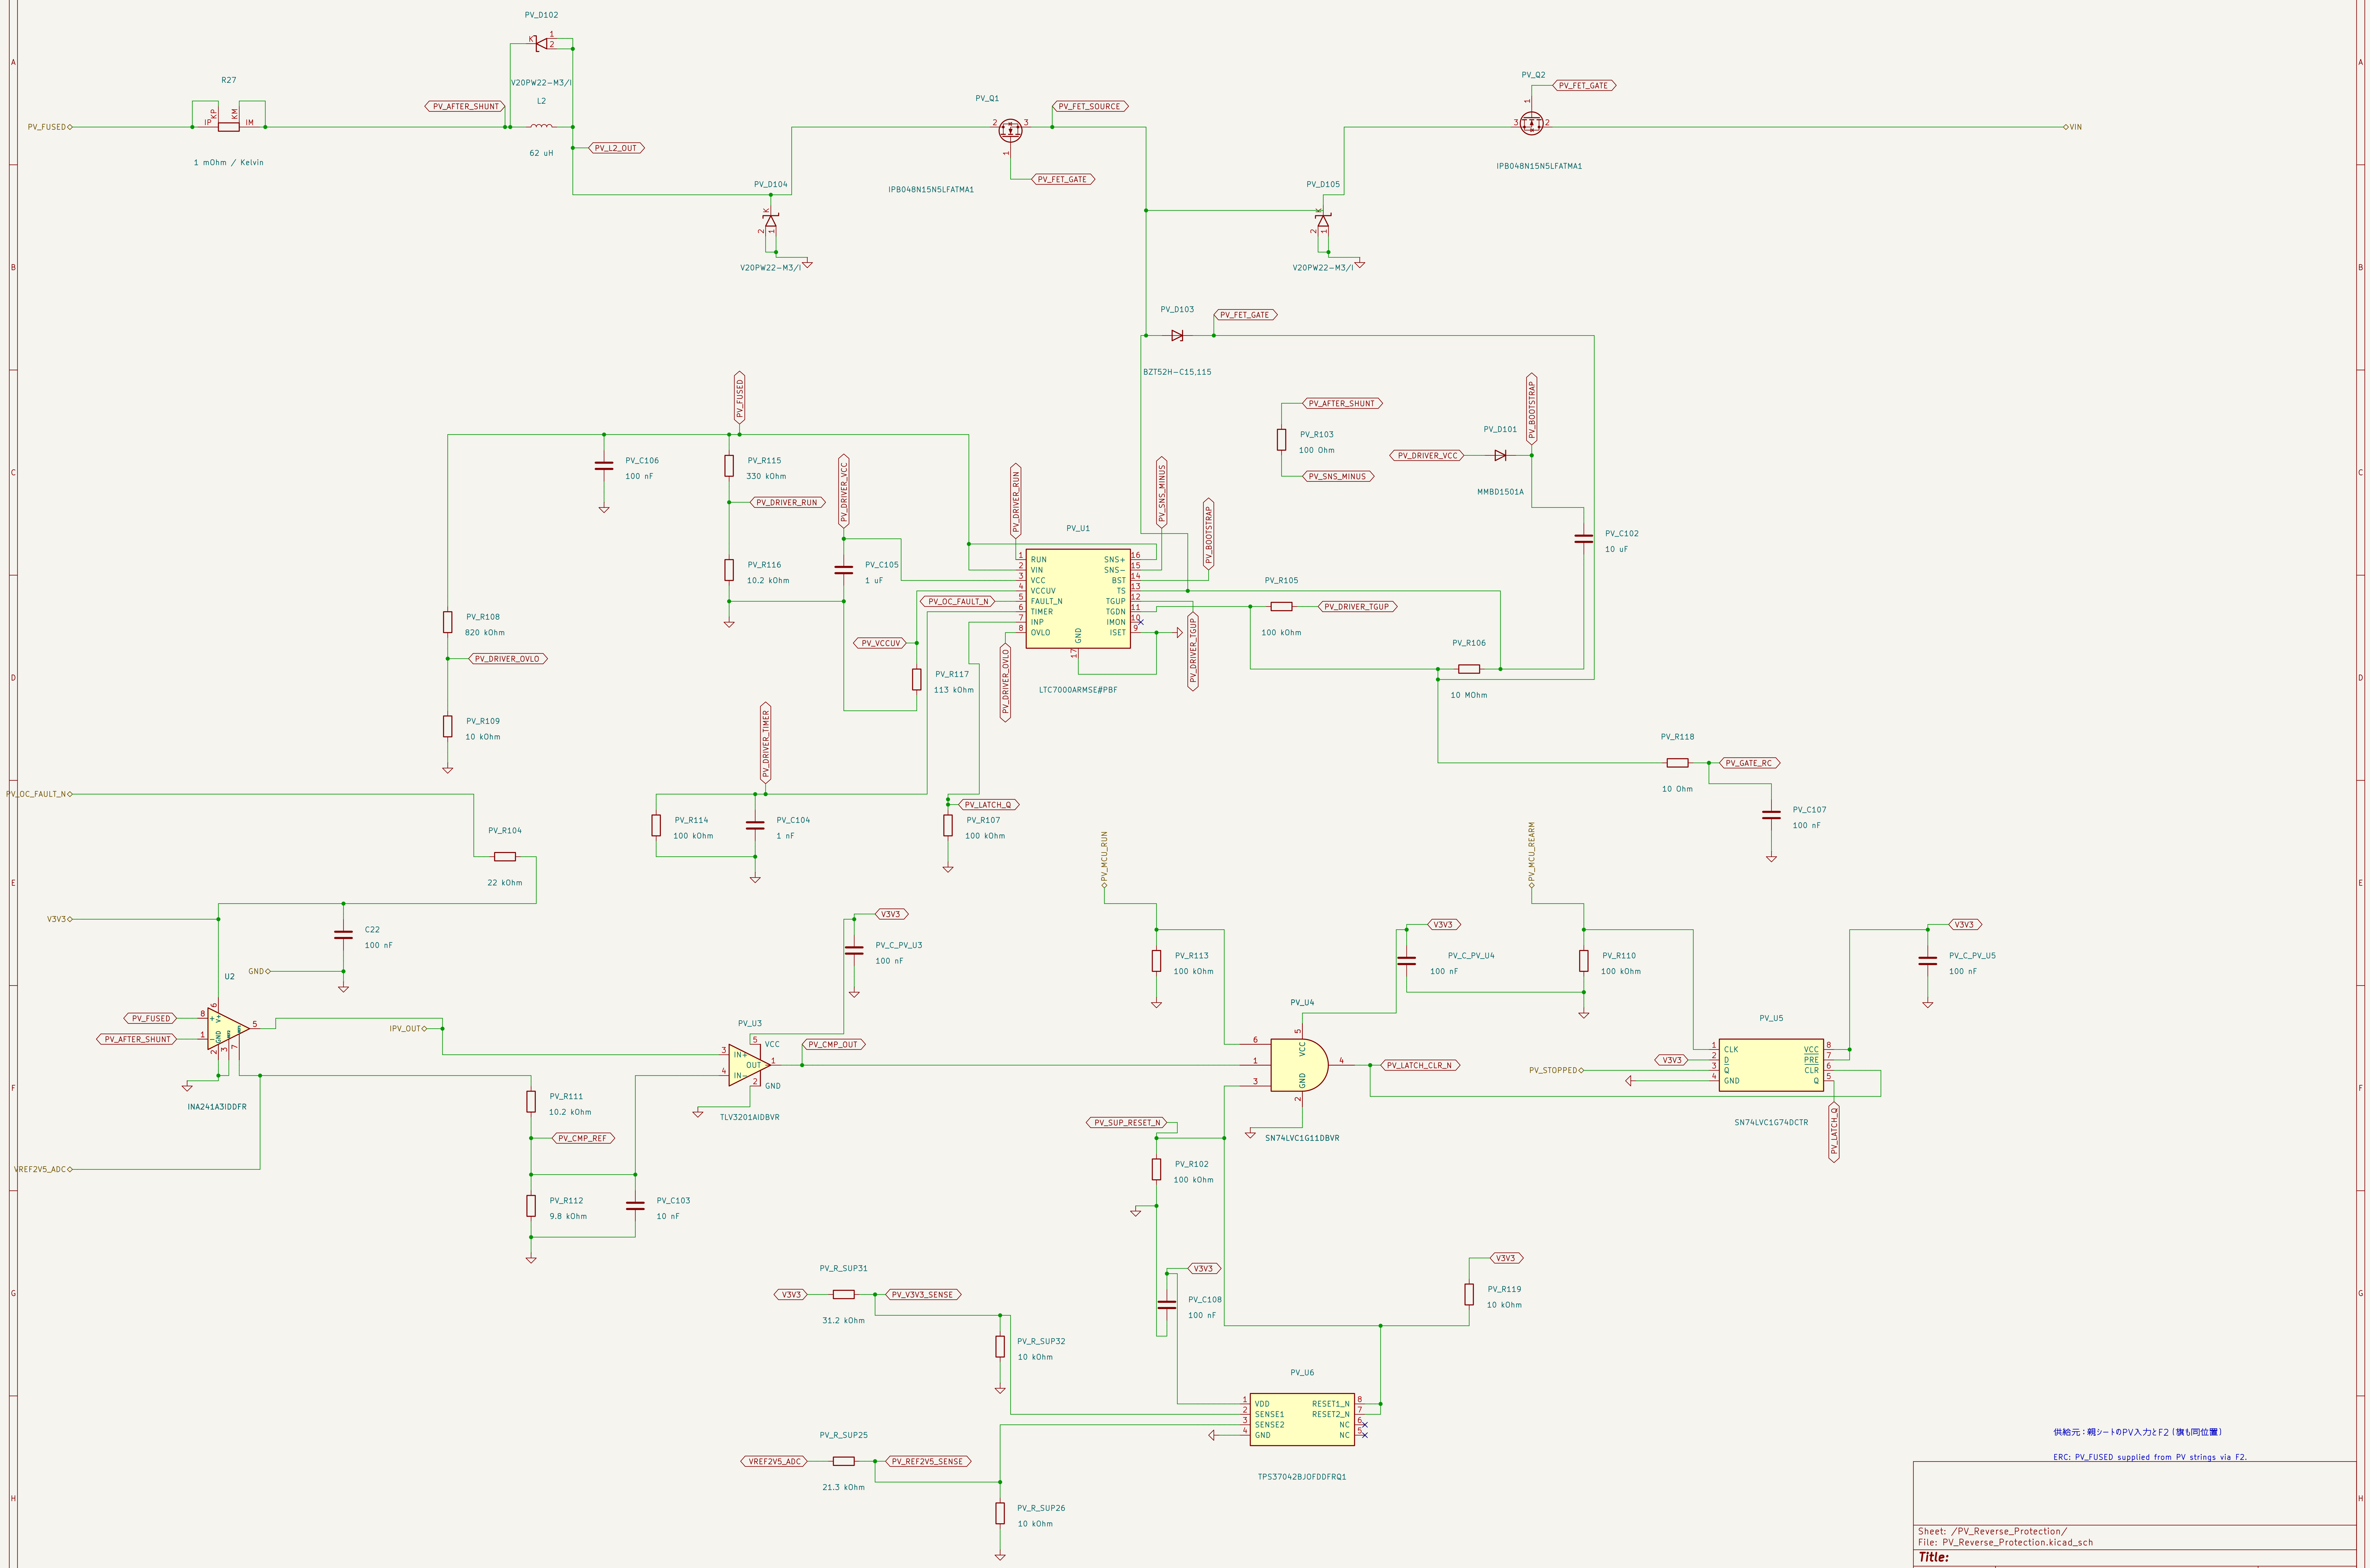

供給元：親シートのPV入力とF2（旗も同位置）

ERC: PV_FUSED supplied from PV strings via F2.

Sheet: /PV_Reverse_Protection/
File: PV_Reverse_Protection.kicad_sch
Title:
Size: A2
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 3/3