LED V1 System Design

By: Mahmoud Adel Matarawy


Email: mahmoudsarhan02672@gmail.com

Detailed Requirements


Read System Requirements Specifications

- 1. Description
 - 1. Hardware Requirements
 - 1. Four LEDs (LED0, LED1, LED2, LED3)
 - 2. One button (BUTTON0)
 - 2. Software Requirements
 - 1. Initially, all LEDs are OFF
 - 2. Once BUTTON0 is pressed, LED0 will be ON
 - 3. Each press further will make another LED is ON
 - 4. At the fifth press, LED0 will be changed to be OFF
 - 5. Each press further will make only one LED is OFF
 - 6. This will be repeated forever
 - 7. The sequence is described below
 - 1. Initially (OFF, OFF, OFF, OFF)
 - 2. Press 1 (ON, OFF, OFF, OFF)
 - 3. Press 2 (ON, ON, OFF, OFF)
 - 4. Press 3 (ON, ON, ON, OFF)
 - 5. Press 4 (ON, ON, ON, ON)
 - 6. Press 5 (OFF, ON, ON, ON)
 - 7. Press 6 (OFF, OFF, ON, ON)
 - 8. Press 7 (OFF, OFF, OFF, ON)
 - 9. Press 8 (OFF, OFF, OFF, OFF)
 - 10. Press 9 (ON, OFF, OFF, OFF)

Layered architecture

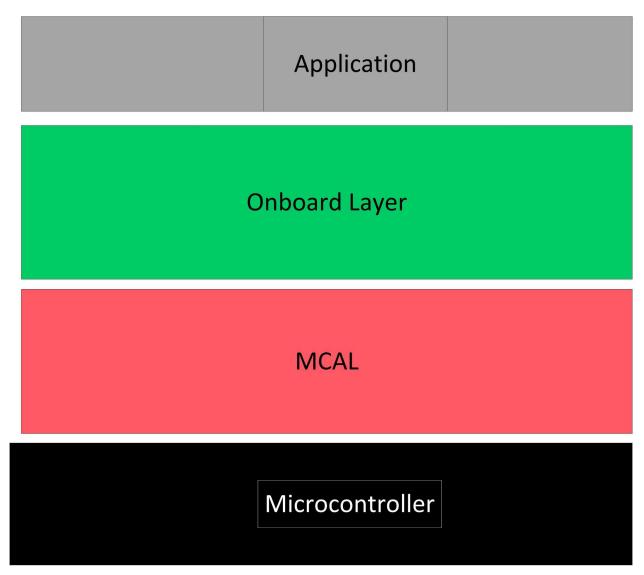

System modules

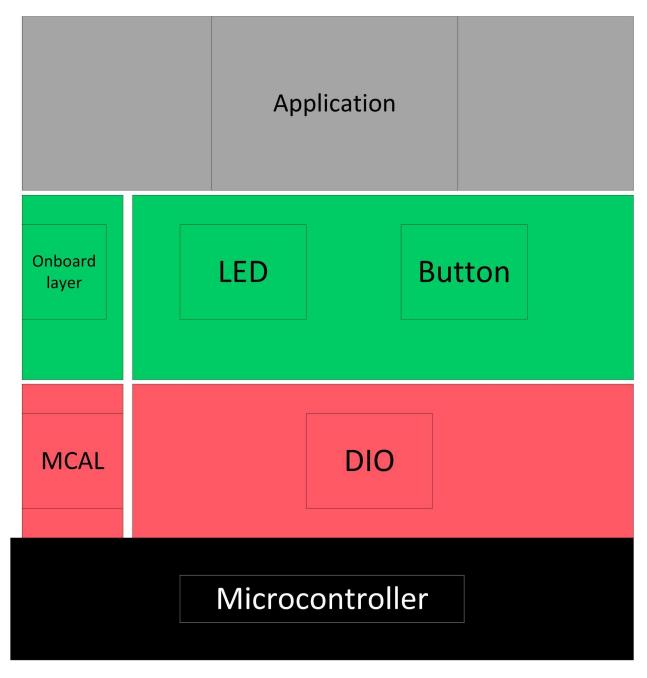

APIs

MCAL APIs

DIO API:

Type definitions:

• Dio_ChannelType

Name	Dio_ChannelType
Туре	Enumeration
Range	Shall contain all pins ID
Description	Dio_ChannelType
Available via	DIO_Config.h

• Dio_PortType

Name	Dio_PortType
Туре	Enumeration
Range	Shall contain all ports ID
Description	Dio_PortType
Available via	DIO_Config.h

• DIO_Errors

Name	DIO_Errors
Туре	Enumeration

Range	DIO_E_OK 0x00 DIO error OK				
	DIO_InvalidPin	0x01	DIO error, invalid pin number.		
Description	DIO Errors				
Available via	DIO.h				

• Dio_LevelType

Name	Dio_LevelType			
Туре	Enumeration			
Range	STD_LOW	0x00	Physical state 0V	
	STD_HIGH	0x01	Physical state 5V or 3.3V.	
Description	Dio_LevelType			
Available via	DIO.h			

Dio_DIRType

Name	Dio_DIRType			
Туре	Enumeration			
Range	STD_INPUT	0x00	Set pin as input pin	
	STD_OUTPUT	0x01	Set pin as output pin	
Description	Dio_DIRType			
Available via	DIO.h			

Services affecting the hardware unit:

• Dio_ReadChannel

Service name	Dio_ReadChannel			
Syntax	DIO_Errors Dio_ReadChannel(
Parameters (in)	Channelld	level		
	level			STD_HIGH
				STD_LOW
Return	DIO_Errors		DIO_E_OK DIO_InvalidPin	
Description	This Function gets the level of the pin			

This function shall return DIO_InvalidPin if pin number is invalid.

Dio_WriteChannel

Service name	Dio_WriteChannel			
Syntax	DIO_Errors Dio_WriteChannel(Dio_ChannelType ChannelId, Dio_LevelType level);			
Parameters (in)	Channelld	Channel ID		
	level	Value to be set STD_HIGH		STD_HIGH
		STD_LOW		
Return	DIO_Errors	DIO_E_OK DIO_InvalidPin		
Description	This Function gets the level of the pin			

• This function shall return DIO_InvalidPin if pin number is invalid.

• Dio_ChannelSetDIR

|--|


Syntax	DIO_Errors Dio_ChannelSetDIR(
Parameters (in)	Channelld Channel ID			
	dir	Value to be set STD_INPUT		STD_INPUT
		STD_OUTPUT		
Return	DIO_Errors	DIO_E_OK DIO_InvalidPin		
Description	This Function sets the Direction of the pin			

This function shall return DIO_InvalidPin if pin number is invalid.

Onboard APIs

LED API:

State machine:

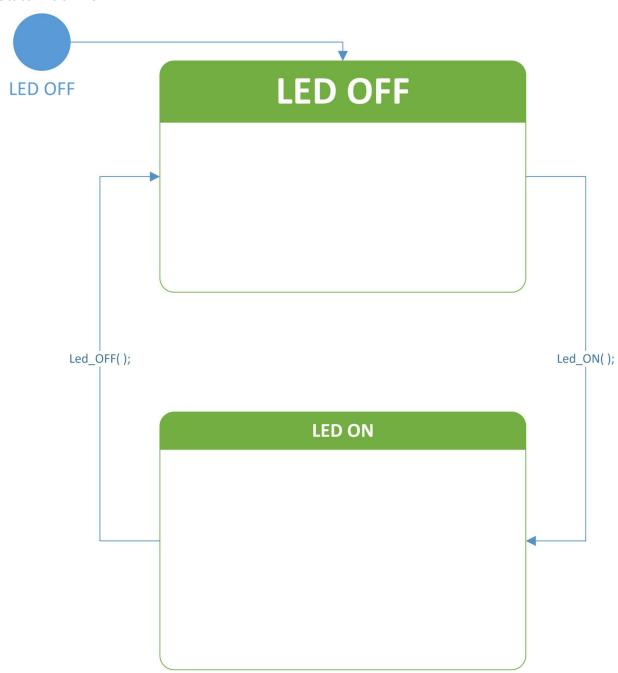

Type definitions:

• LED_Config_Type

Name	LED_Config_Type
Туре	Structure
Description	This is the type of the external data structure containing the overall configuration data for the LED API
Available via	led_types.h

• LED_STATE_type

Name	LED_STATE_type				
Туре	Enumeration				
Range	LED_OFF 0x00 LED OFF STATE				
	LED_ON	0x01	LED ON STATE		
Description	LED State Enum				
Available via	led.h				

• LED_ID_type

Name	LED_ID_type			
Туре	Enumeration			
Range	LED_1 0x01 LED 1			
	LED_2	LED 2		
	LED_3	0x03	LED 3	
	LED_4	0x04	LED 4	
Description	LED ID Enum			
Available via	led.h			

Services affecting the hardware unit:

• led_Init

Service name	led_Init
Syntax	void led_Init(void);
Return	None
Description	This Function Initialize the LED module

• led_OFF

Service name	led_OFF			
Syntax	void led_OFF(LED_ID_type led);			
Parameters (in)	led LED_1 0x01			
		0x02		
		0x03		
		LED_4	0x04	
Return	None			
Description	This Function Sets a LED OFF.			

• led_ON


Service name	led_ON		
Syntax	void led_ON(LED_ID_type led);		
Parameters (in)	led LED_1 0x01		0x01
		LED_2	0x02
		LED_3	0x03

		LED_4	0x04
Return	None		
Description	This Function Sets a LED ON.		


Button API:

Flowchart:

button_Main_Task flowchart

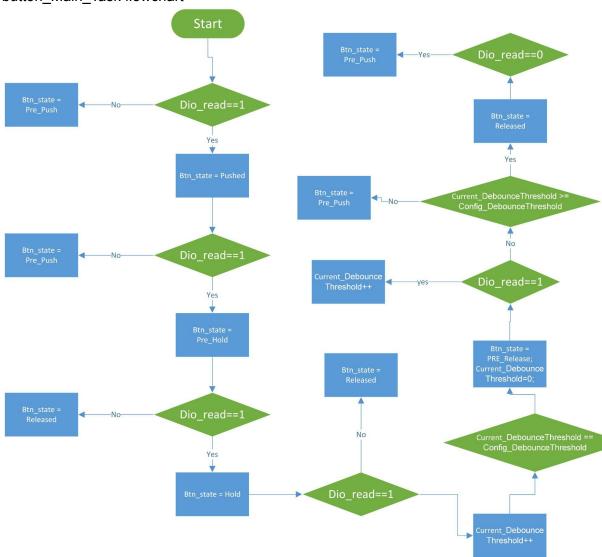

State machine:

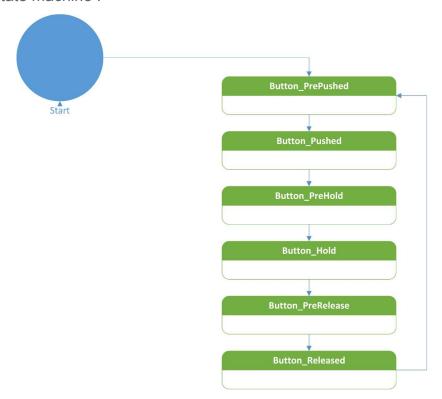

Type definitions:

• Button_configType

Name	Button_configType
Туре	Structure
Description	This is the type of the external data structure containing the overall configuration data for the Button API
Available via	Button_Types.h

• Button_LevelType

Name	Button_LevelType		
Туре	Enumeration		
Range	BT_PUSH_LEVEL	0x00	Push Level
	BT_RELEASE_LEVEL	0x01	Release Level

Description	Button Level Enum
Available via	Button_Types.h

• Button_StateType

Name	Button_StateType			
Туре	Enumeration			
Range	BT_PRE_PUSH	BT_PRE_PUSH 0x00 Pre Push Level		
	BT_PUSHED	0x01	Pushed Level	
	BT_PRE_HOLD	0x02	Pre Hold Level	
	BT_HOLD	0x03	Hold Level	
	BT_PRE_RELEASE	0x04	Pre Release Level	
	BT_RELEASED	0x05	Released Level	
	BT_UNDEFINED	0x06	Undefined	
Description	Button state Enum			
Available via	Button.h			

Button_IdType

Name	Button_IdType		
Туре	Enumeration		
Range	Button_Start 0x00 Start Button		
Description	Button ID Enum		
Available via	Button.h		

Services affecting the hardware unit:

• getButtonState

Service name	getButtonState			
Syntax	Button_StateTyp getButtonState(
Parameters (in)	enmButtonId Start 0x00			
Return	Button_StateTyp		BT_PRE_PUSH	
			BT_PUSHED	
			BT_PRE_HOLD	
			BT_HOLD	
			BT_PRE_RELEASE	
			BT_RELEASED	
			BT_UNDEFINED	
Description	This Function gets the Button state.			


• button_Main_Task

Service name	button_Main_Task
Syntax	void button_Main_Taskt(void);
Parameters (in)	NONE
Return	NONE
Description	This Function update all button states Shall call periodic

App APIs:

App API:

Flowchart:

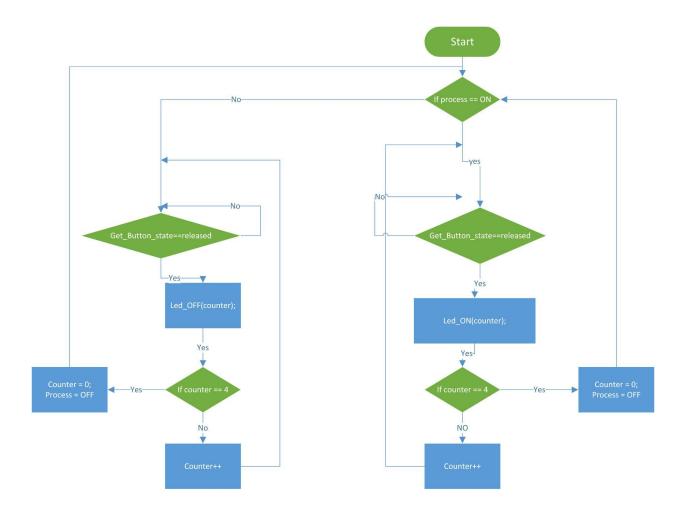

Services affecting the hardware unit:

• appStart

Service name	appStart	
Syntax	void appStart(void);	
Parameters (in)	NONE	
Return	NONE	
Description	This Function Start the application.	