

# L2D2<sup>®</sup> LAMP


## L9398-01

### 1. General

|                                 |                                |
|---------------------------------|--------------------------------|
| Window material                 | UV glass                       |
| Cooling                         | Not required                   |
| Bulb wall temperature (Max.) *1 | 300 degrees C                  |
| Bulb wall temperature range *1  | 245 degrees C to 290 degrees C |
| Aperture diameter               | 0.5 mm $\phi$                  |
| * 1. In operation               |                                |

### 2. Characteristics and specifications (at 25 °C)

|                             |                         |
|-----------------------------|-------------------------|
| Filament type               | SQ 10V                  |
| Warm-up                     |                         |
| Filament (Heater) voltage   | 10 V dc $\pm$ 1 V dc    |
| Filament (Heater) current   | Approx. 1.2 A dc        |
| Warm-up time                | 20 s Min.               |
| Operating                   |                         |
| Filament (Heater) voltage   | 7 V dc $\pm$ 0.5 V dc   |
| Filament (Heater) current   | Approx. 1.0 A dc        |
| Discharge starting voltage  | 400 V dc Max.           |
| Anode current               | 300 mA dc $\pm$ 30mA dc |
| Tube drop voltage           | Typ. 80 V dc            |
| Stability (at 230 nm)       |                         |
| Drift                       | $\pm$ 0.3 % / h Max.    |
| Fluctuation                 | Typ. 0.005 % p-p        |
| Guaranteed life (at 230 nm) | 2000 hours              |
| Anode supplied voltage      | 150 V dc Min            |
| Spectral distribution       | 185 nm to 400 nm        |

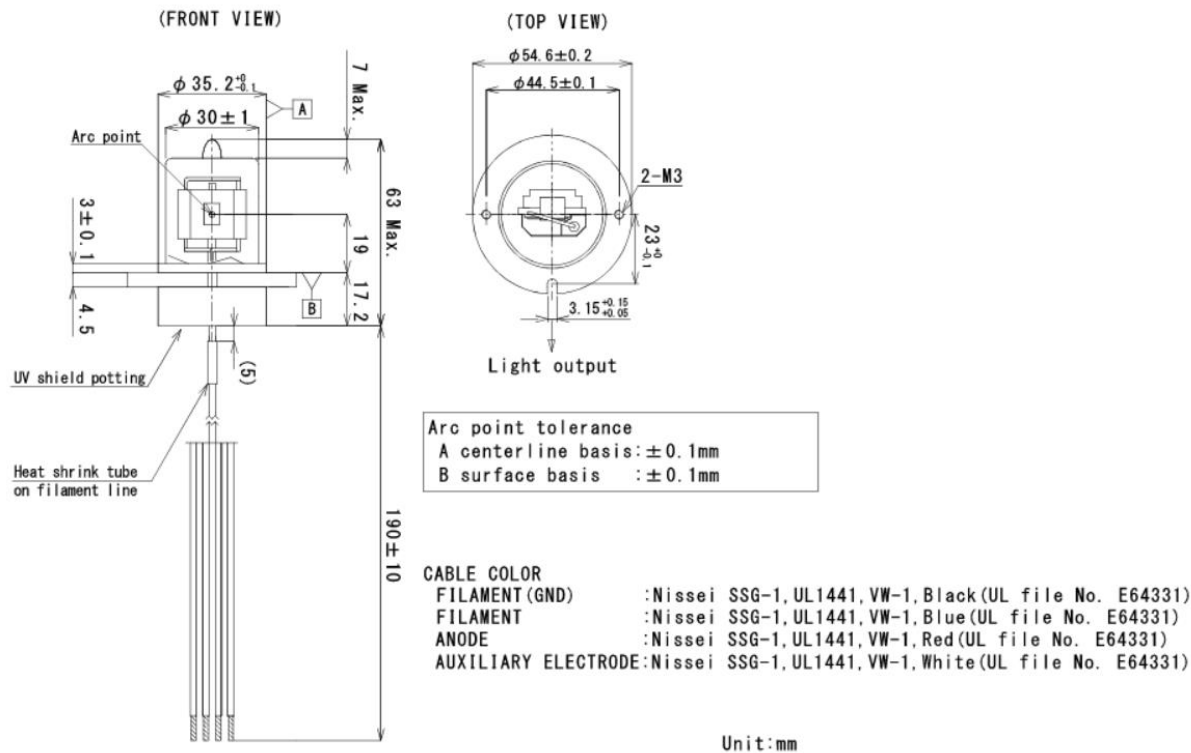

Information furnished by Hamamatsu is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice.

## &lt;Correction/Modification Record&gt;

| Date      | Note                    |
|-----------|-------------------------|
| 2010/1/25 | First Issue             |
| 2011/7/26 | Add Arc point tolerance |
| 2023/1/17 | Add UV Shield potting   |