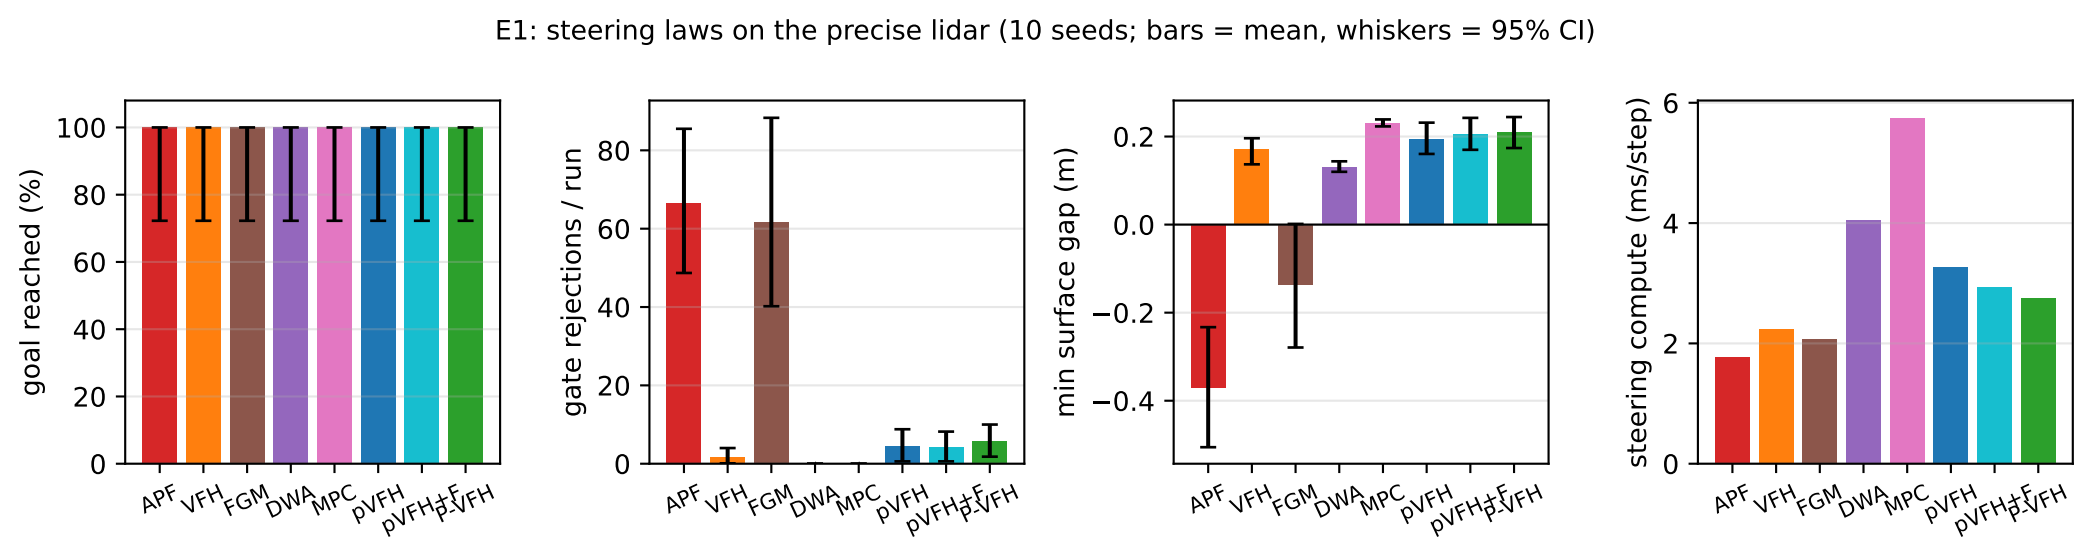
E1: steering laws on the precise lidar (10 seeds; bars = mean, whiskers = 95% CI)
goal reached (%)
gate rejections / run
min surface gap (m)
steering compute (ms/step)
APF
VFH
FGM
DWA
MPC
pVFH
pVFH+F
p-VFH