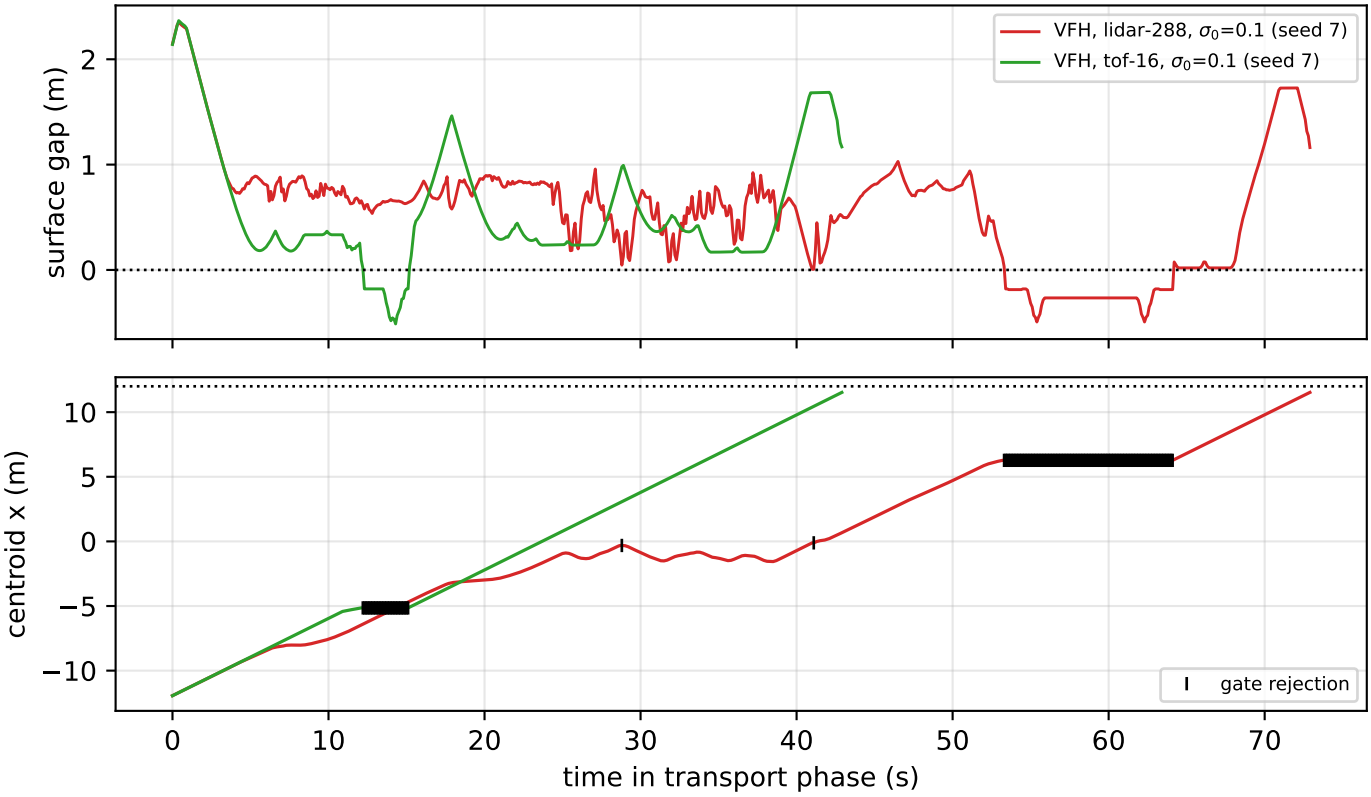
E6 matched pair: same law, noise level and seed; only the sensor differs
surface gap (m)
VFH, lidar-288, σ_0=0.1 (seed 7)
VFH, tof-16, σ_0=0.1 (seed 7)
centroid x (m)
gate rejection
time in transport phase (s)