
Relay Switch

DPDT dry contacts for integration with larger control loops

Requires external 12v power via barrel jack


Mechanical fastening allows installing with a GAURANG DRB48-1 DIN rail mount (optional)

Power Input: UVLO/OVLO/ILIM, Ideal Diode

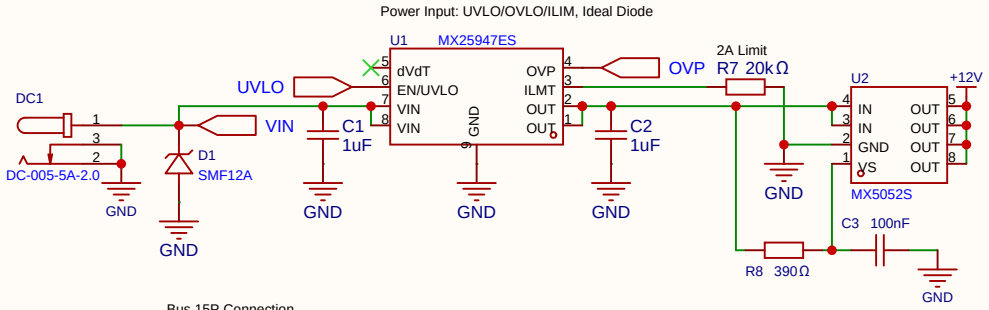


9.21v UVLO
1.4v Ref


14.65v OVP
1.34v Ref

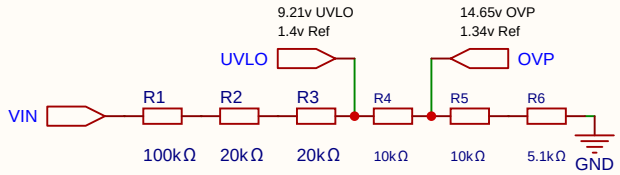


Bus 15P Connection

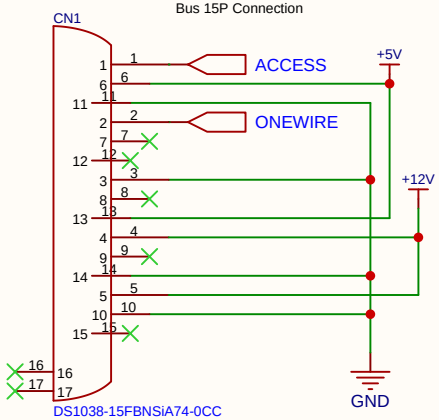

ESD Protection

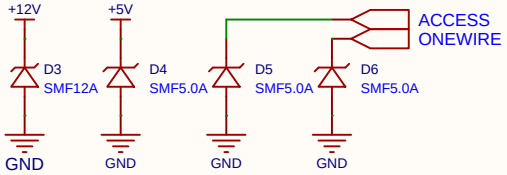


Relay and Fuses

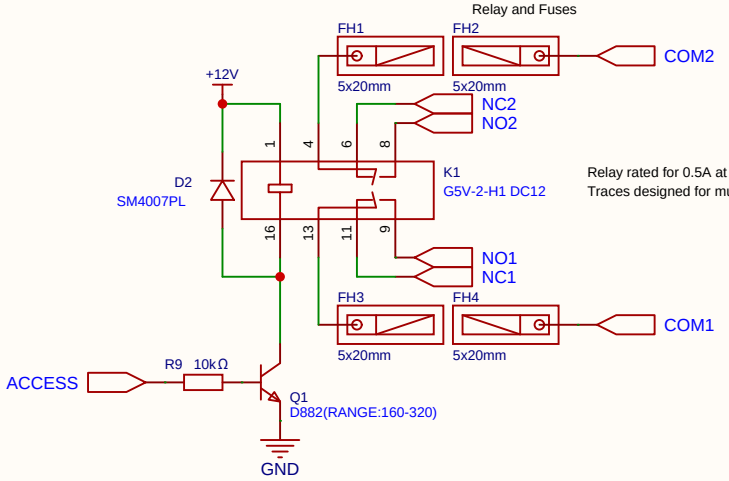


Relay rated for 0.5A at 125VAC
Traces designed for much larger to be safe


OneWire ID + Temperature Chip

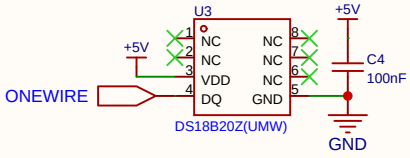

Indicator LEDs

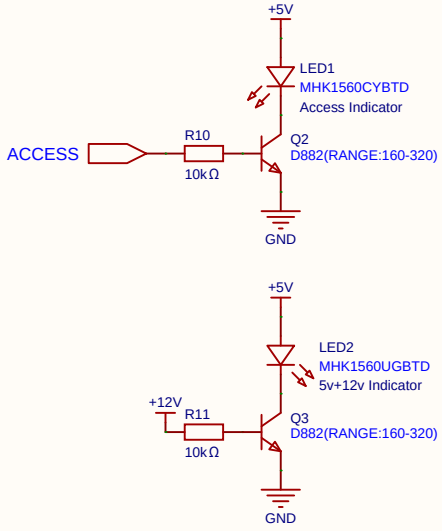

Relay Connections
Pair with WJ2EDGK-5.08-03P-14-00A (LCSC C71371)

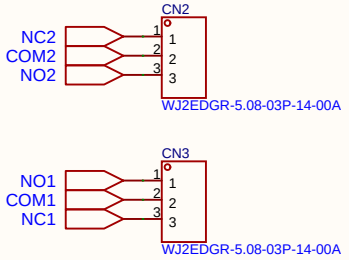

MakeACS Relay Switch

MakeACS | CERN-OHL-S 2.0 | www.github.com/MakeACS

V3.0.0	Main Page	1 / 1