

12345678

RevNo

Revision note

Date

Signature

Checked

A

TODO

* Check courtyards of components.

MAYBE

* Upgrade OT1-6 Dual MOSFETs.

DONE

* Diode footprints/model.

* 2xI2C mux SDA/SDC/INT signals on a header.

* Connector for front-panel USB socket.

* Used 8xI2C mux INT signals.

* Load-cell amplifier (HX717)

* VUSB sense input.

* Additional 5V rail for onboard and up-lights.

* Raspberry Pi 5 power connector

* Supercap/RTC osc - deleted.

* Models for JST-XH (e.g 'B4B-XH-A(LF)(SN)')

* Ethernet PHY

* MOSFET + connector for external ethernet link leds.

* 3V3 power from core board

* LEDs for power rails.

* RGB LED output, for up-lights

* 2x vacuum sensors.

* Head RS422 (non-isolated power).

* Analog mux (2x1 in 4 out).

NO

* reverse polarity protection, need multiple high-current fets like SUD50P06-15-GE3.

D

E

F

G

H

Itemref

Quantity

Title/Name, designation, material, dimension etc

Article No./Reference

Designed by

Checked by

Approved by - date
- 00/00/00

File name

Date
00/00/00


Scale
1:1

Designed by
Dominic Clifton

Edition
0

Sheet
1/1

12345678

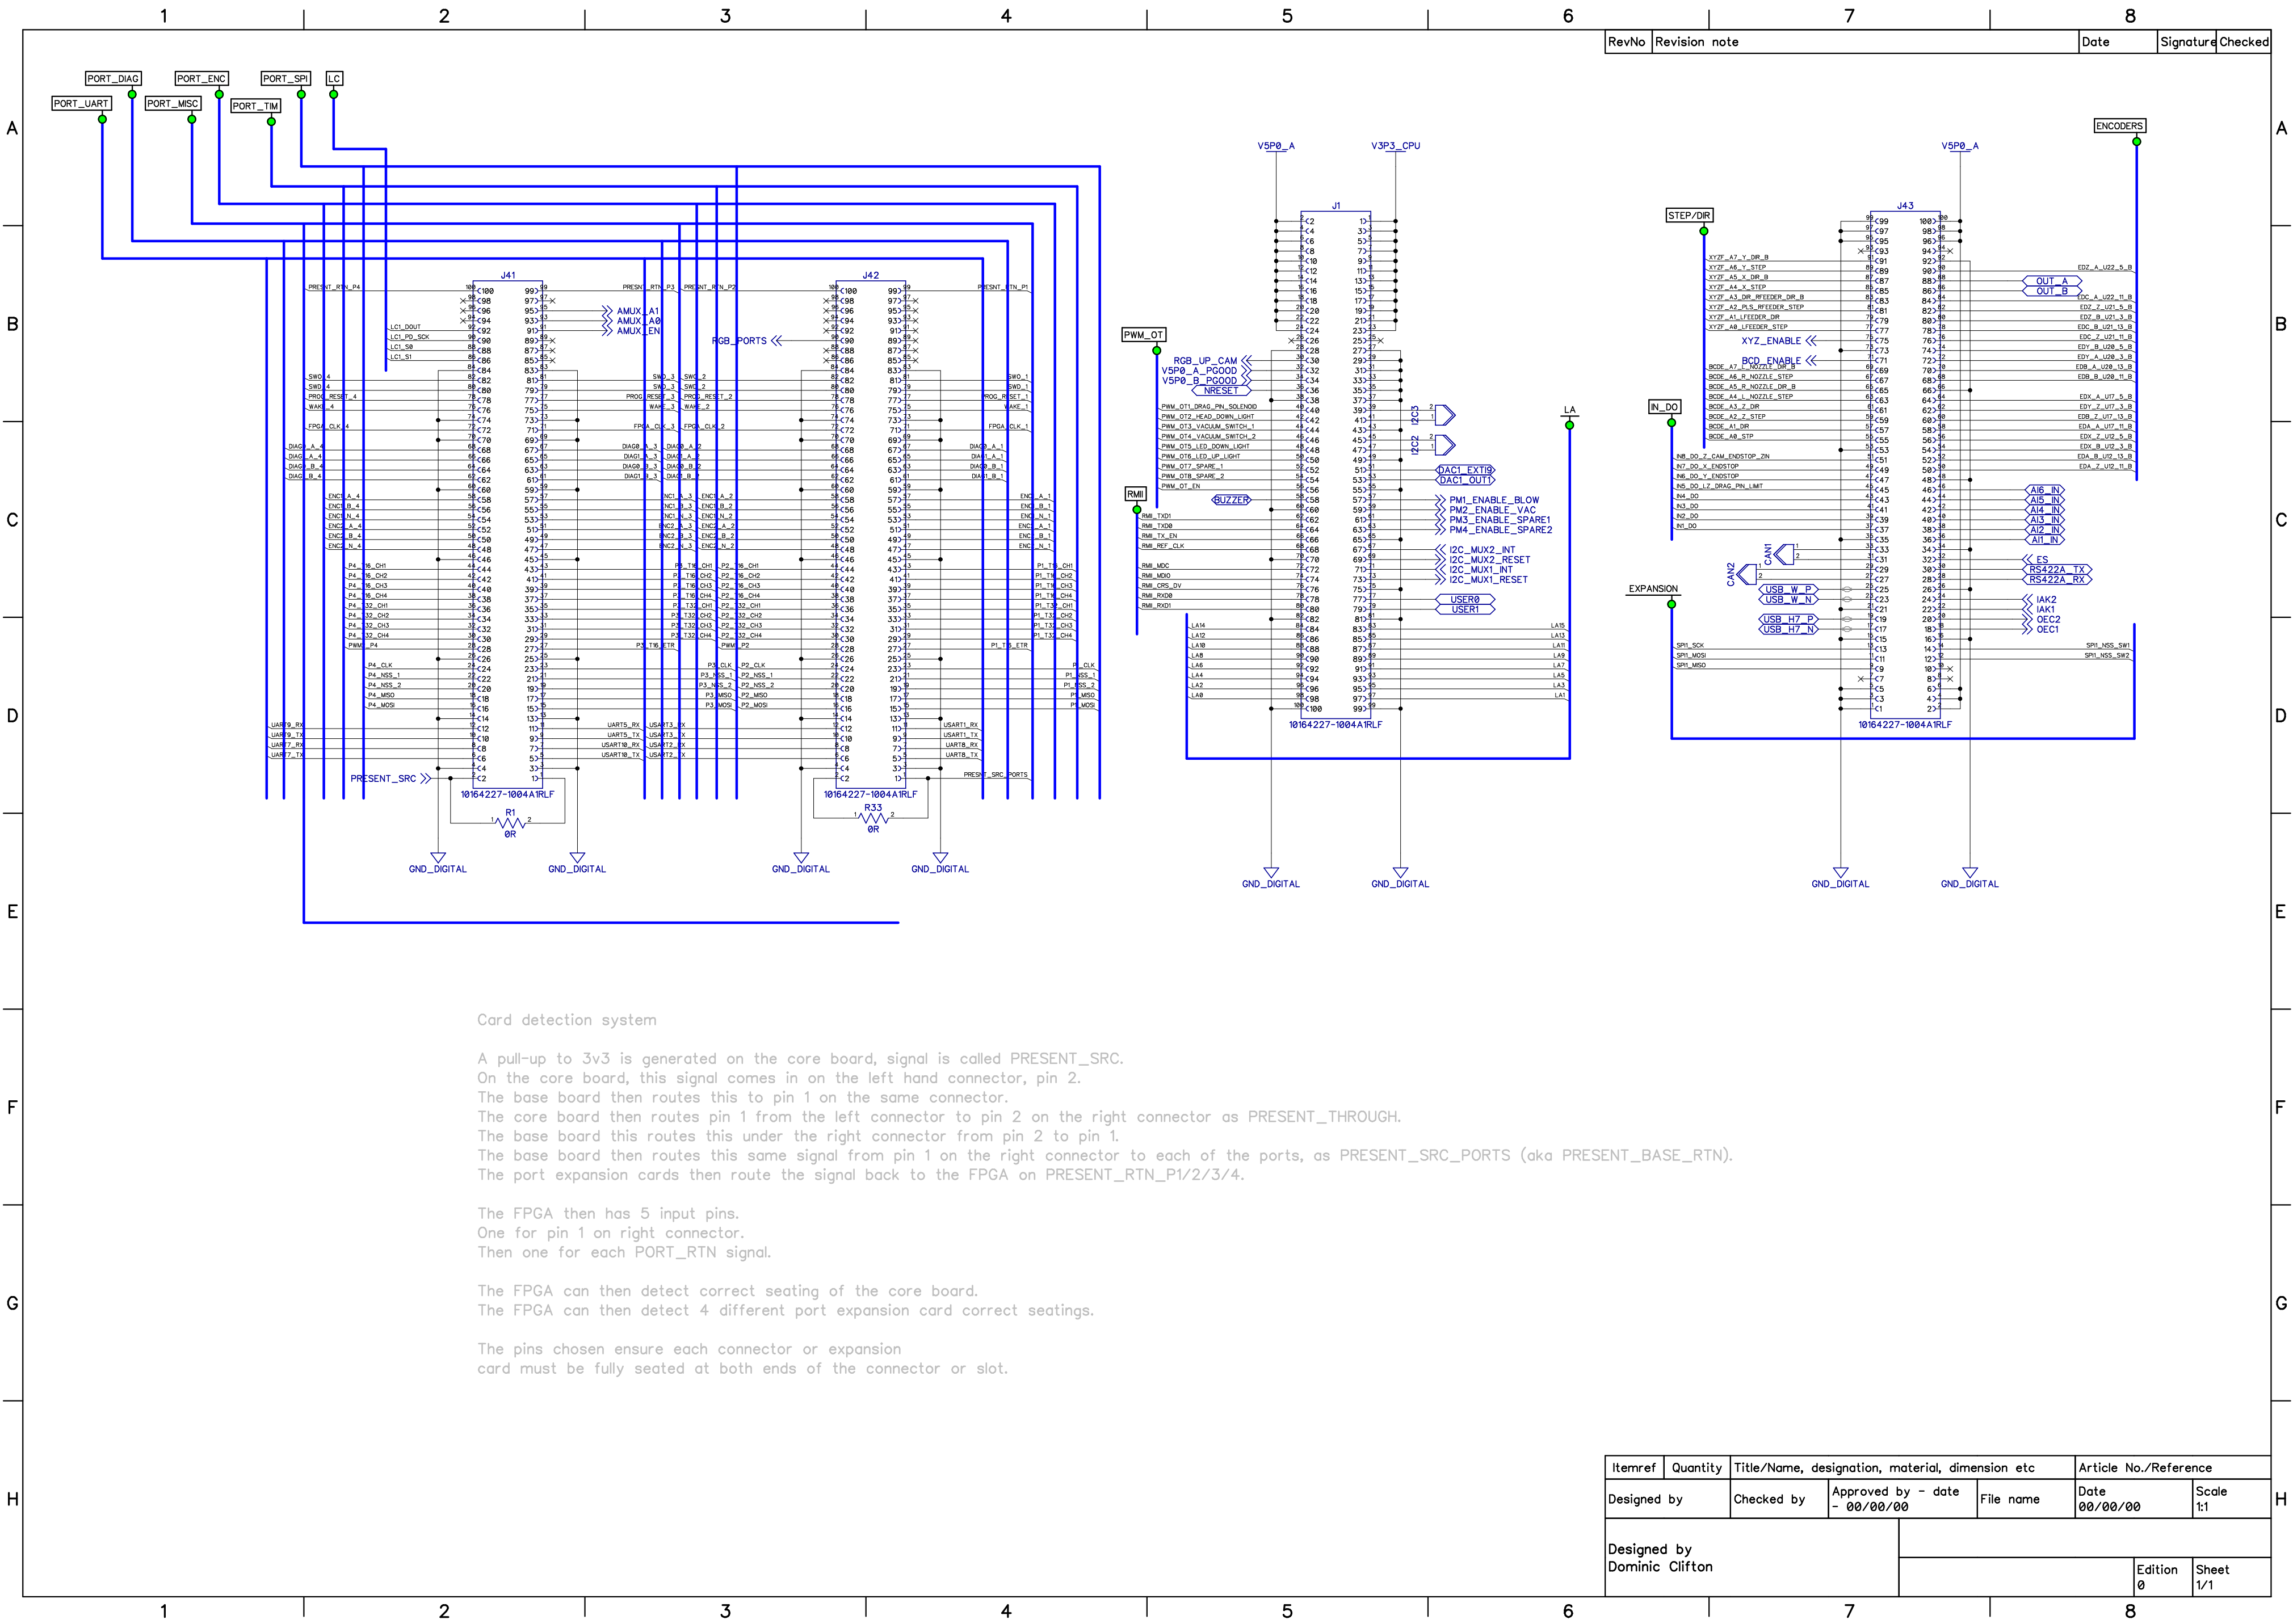





Card detection system

A pull-up to 3v3 is generated on the core board, signal is called PRESENT_SRC.
On the core board, this signal comes in on the left hand connector, pin 2.
The base board then routes this to pin 1 on the same connector.
The core board then routes pin 1 from the left connector to pin 2 on the right connector as PRESENT_THROUGH.
The base board this routes this under the right connector from pin 2 to pin 1.
The base board then routes this same signal from pin 1 on the right connector to each of the ports, as PRESENT_SRC_PORTS (aka PRESENT_BASE_RTN).
The port expansion cards then route the signal back to the FPGA on PRESENT_RTN_P1/2/3/4.


The FPGA then has 5 input pins.
One for pin 1 on right connector.
Then one for each PORT_RTN signal.

The FPGA can then detect correct seating of the core board.
The FPGA can then detect 4 different port expansion card correct seatings.

The pins chosen ensure each connector or expansion card must be fully seated at both ends of the connector or slot.

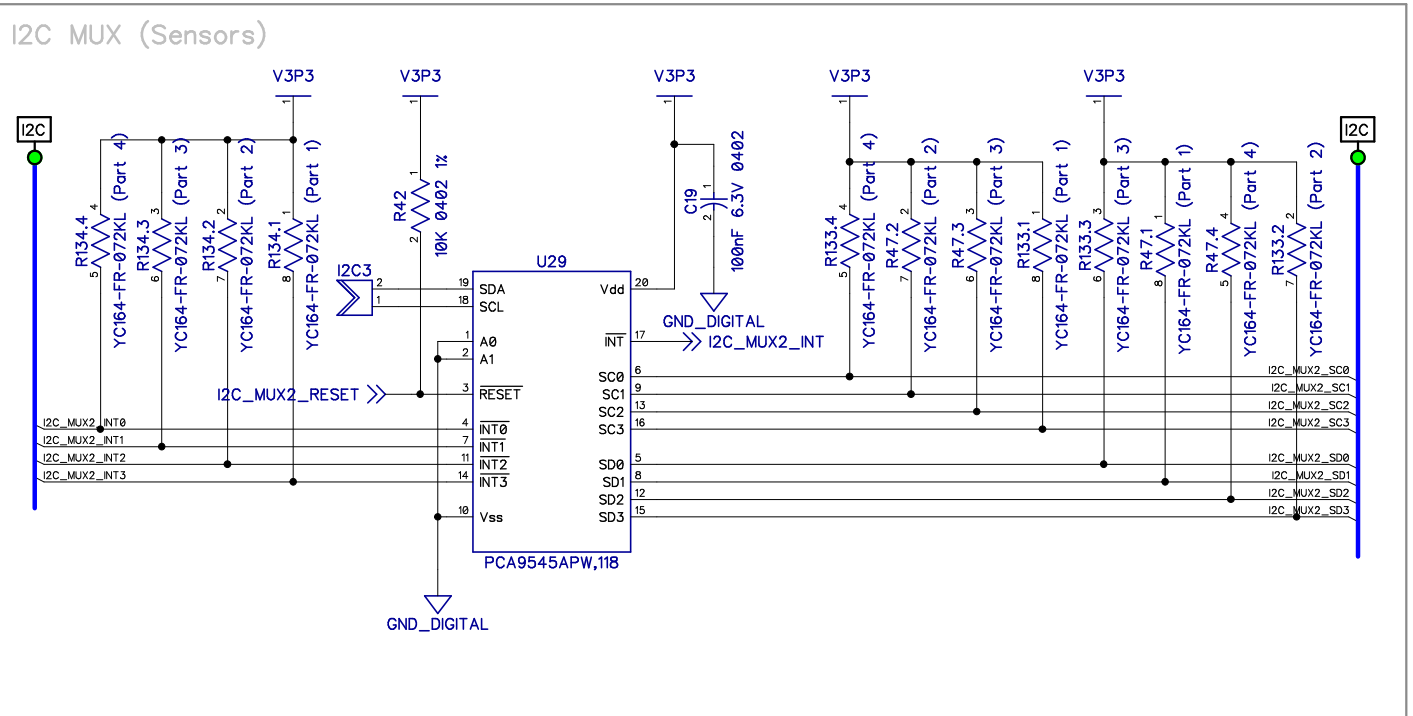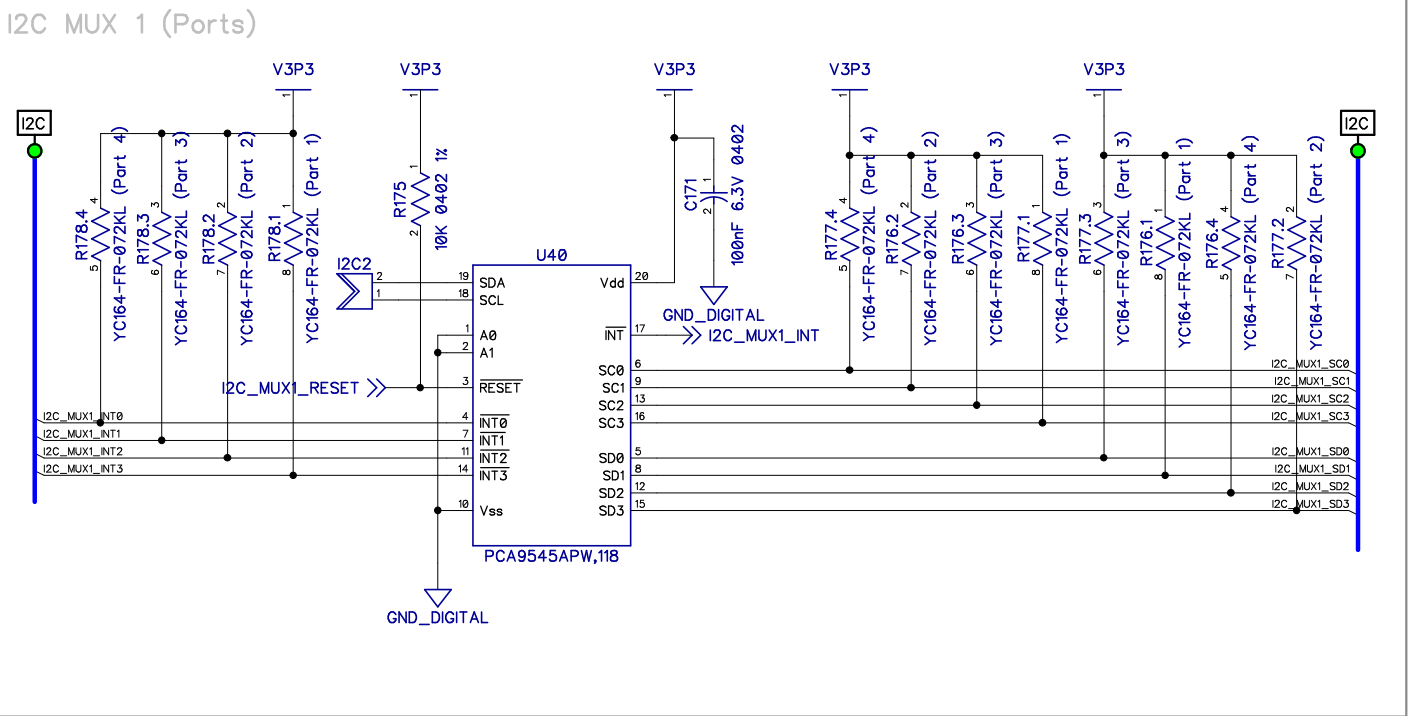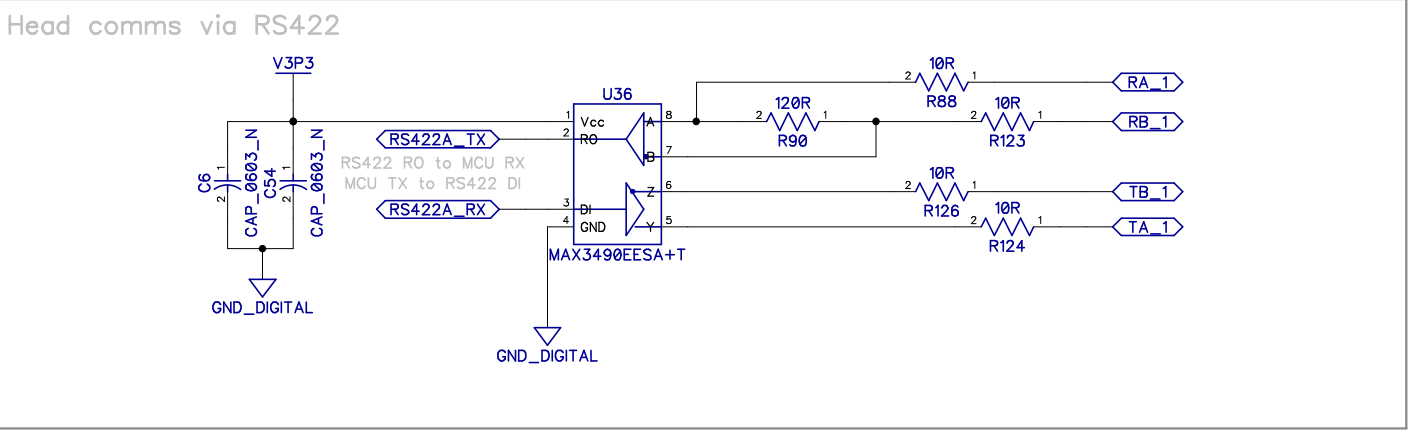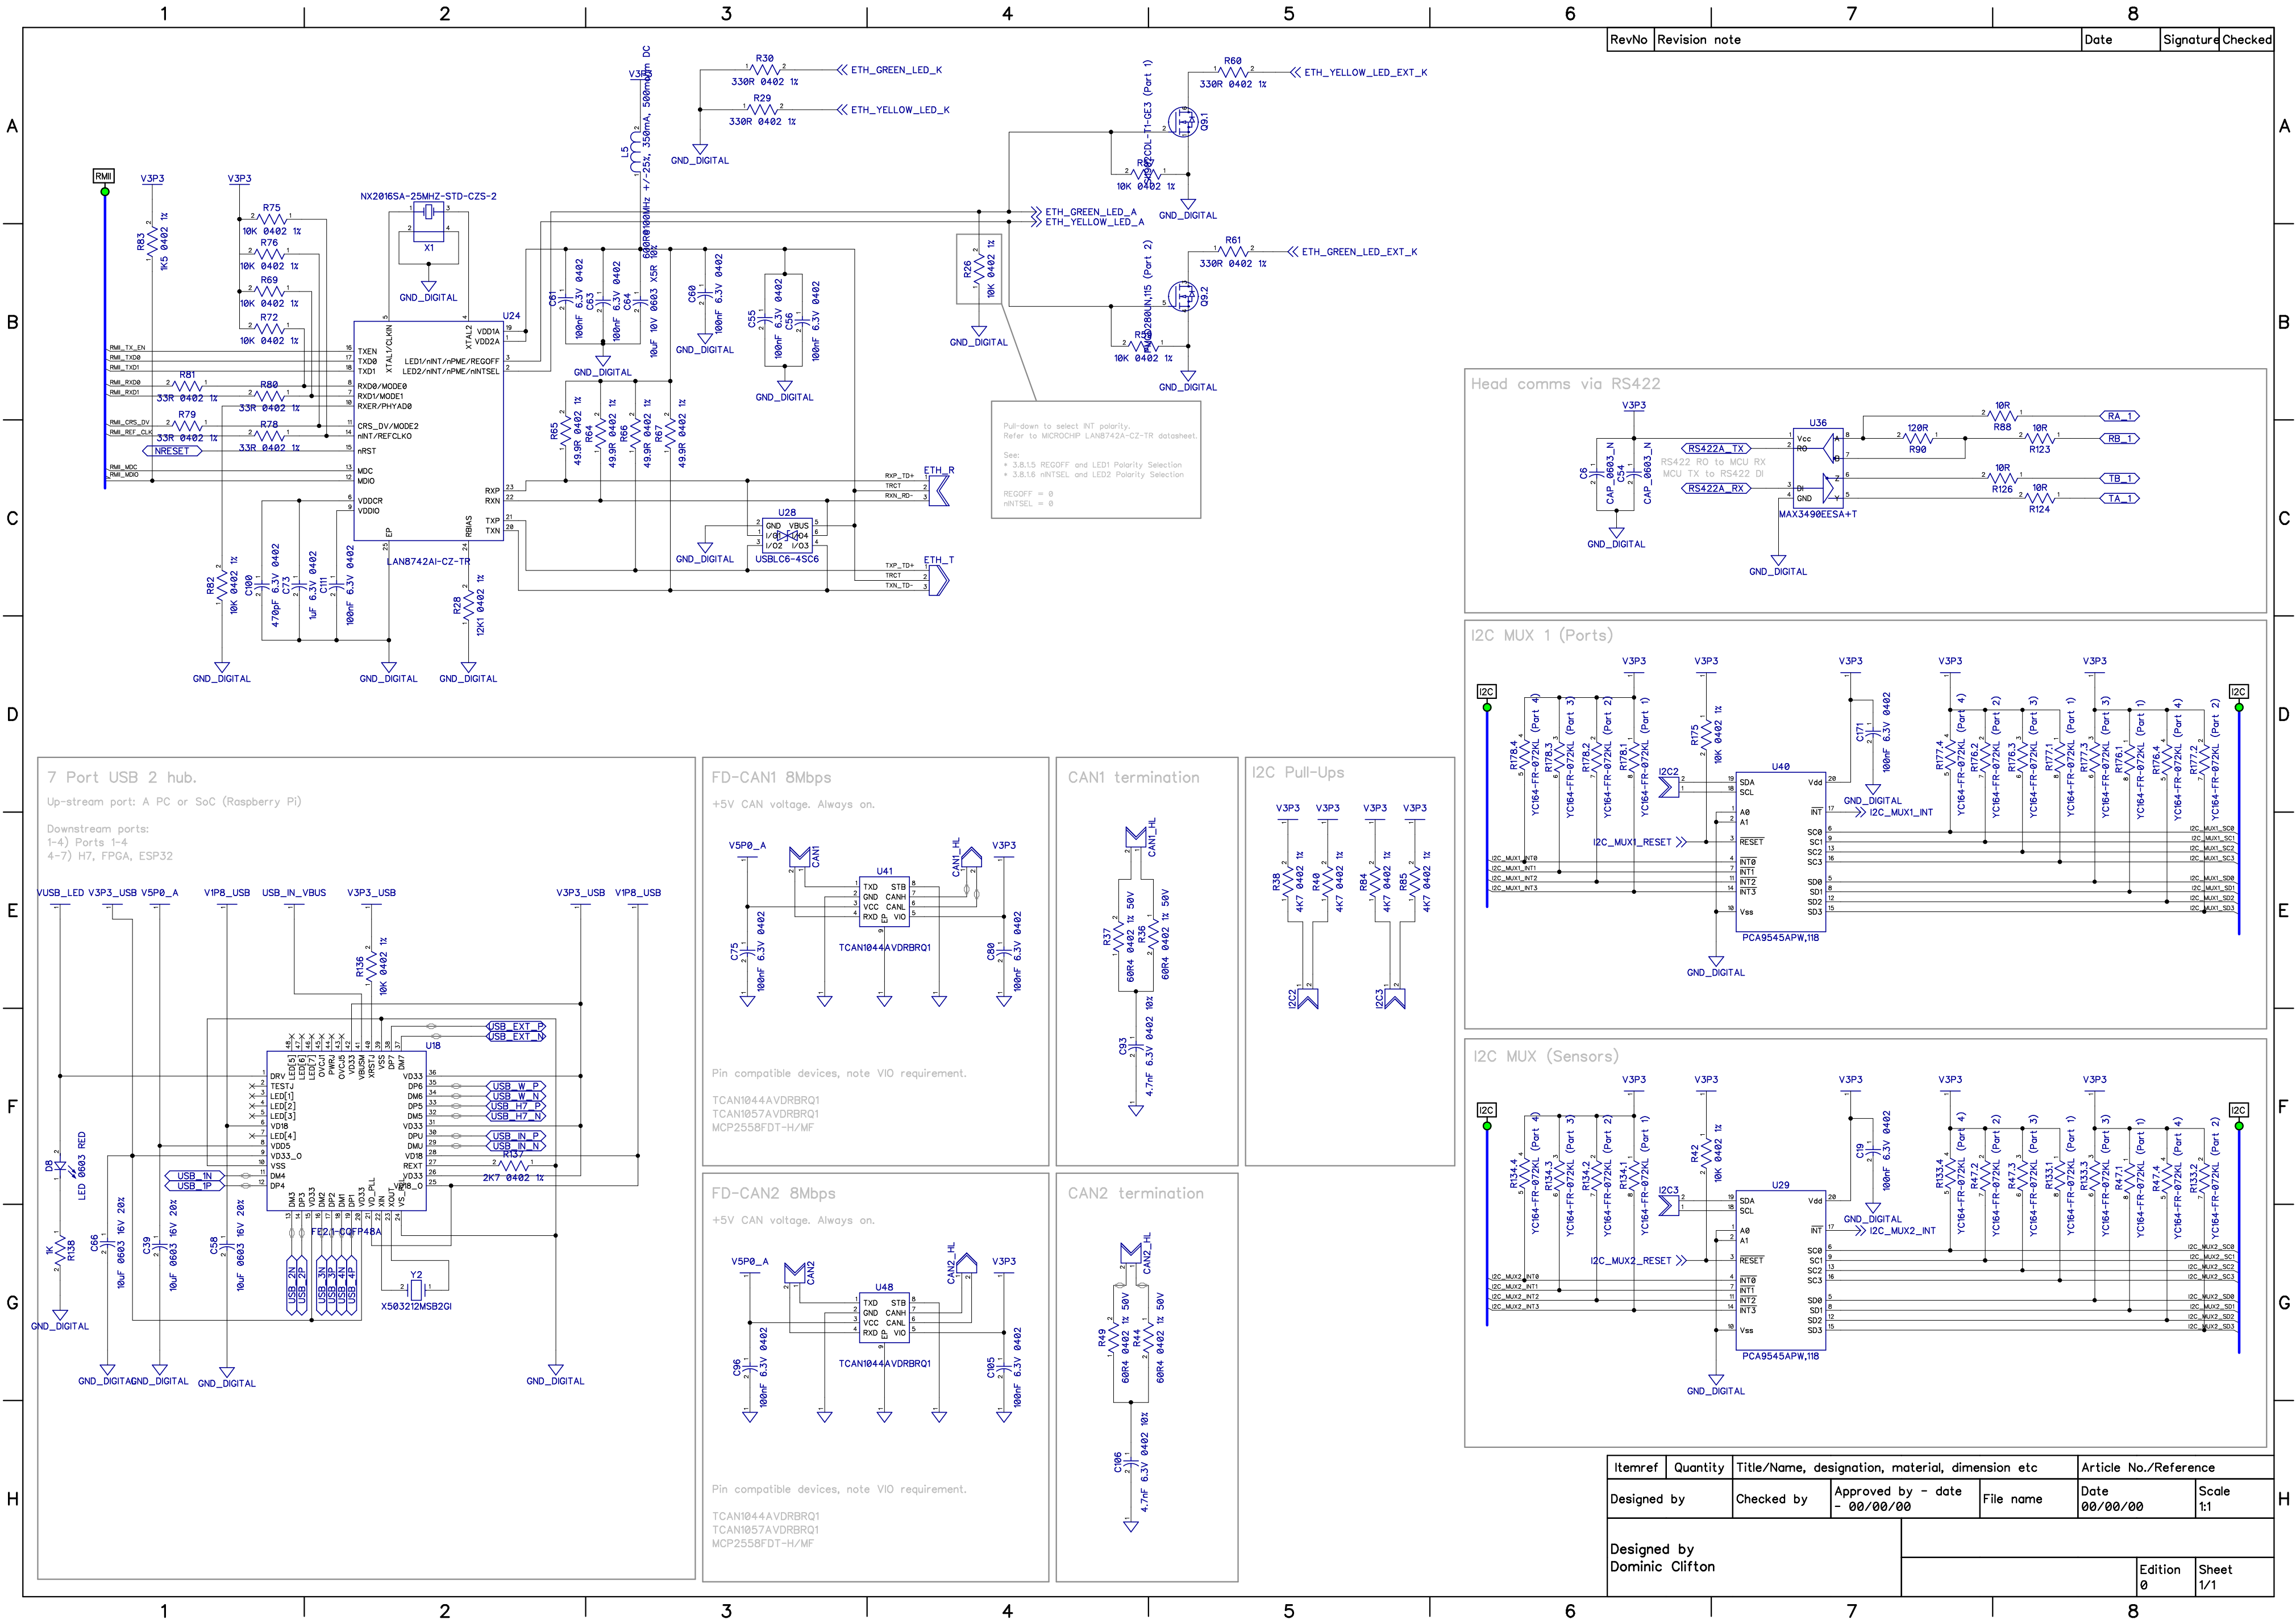


Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1	
Designed by Dominic Clifton						
				Edition 0	Sheet 1/1	

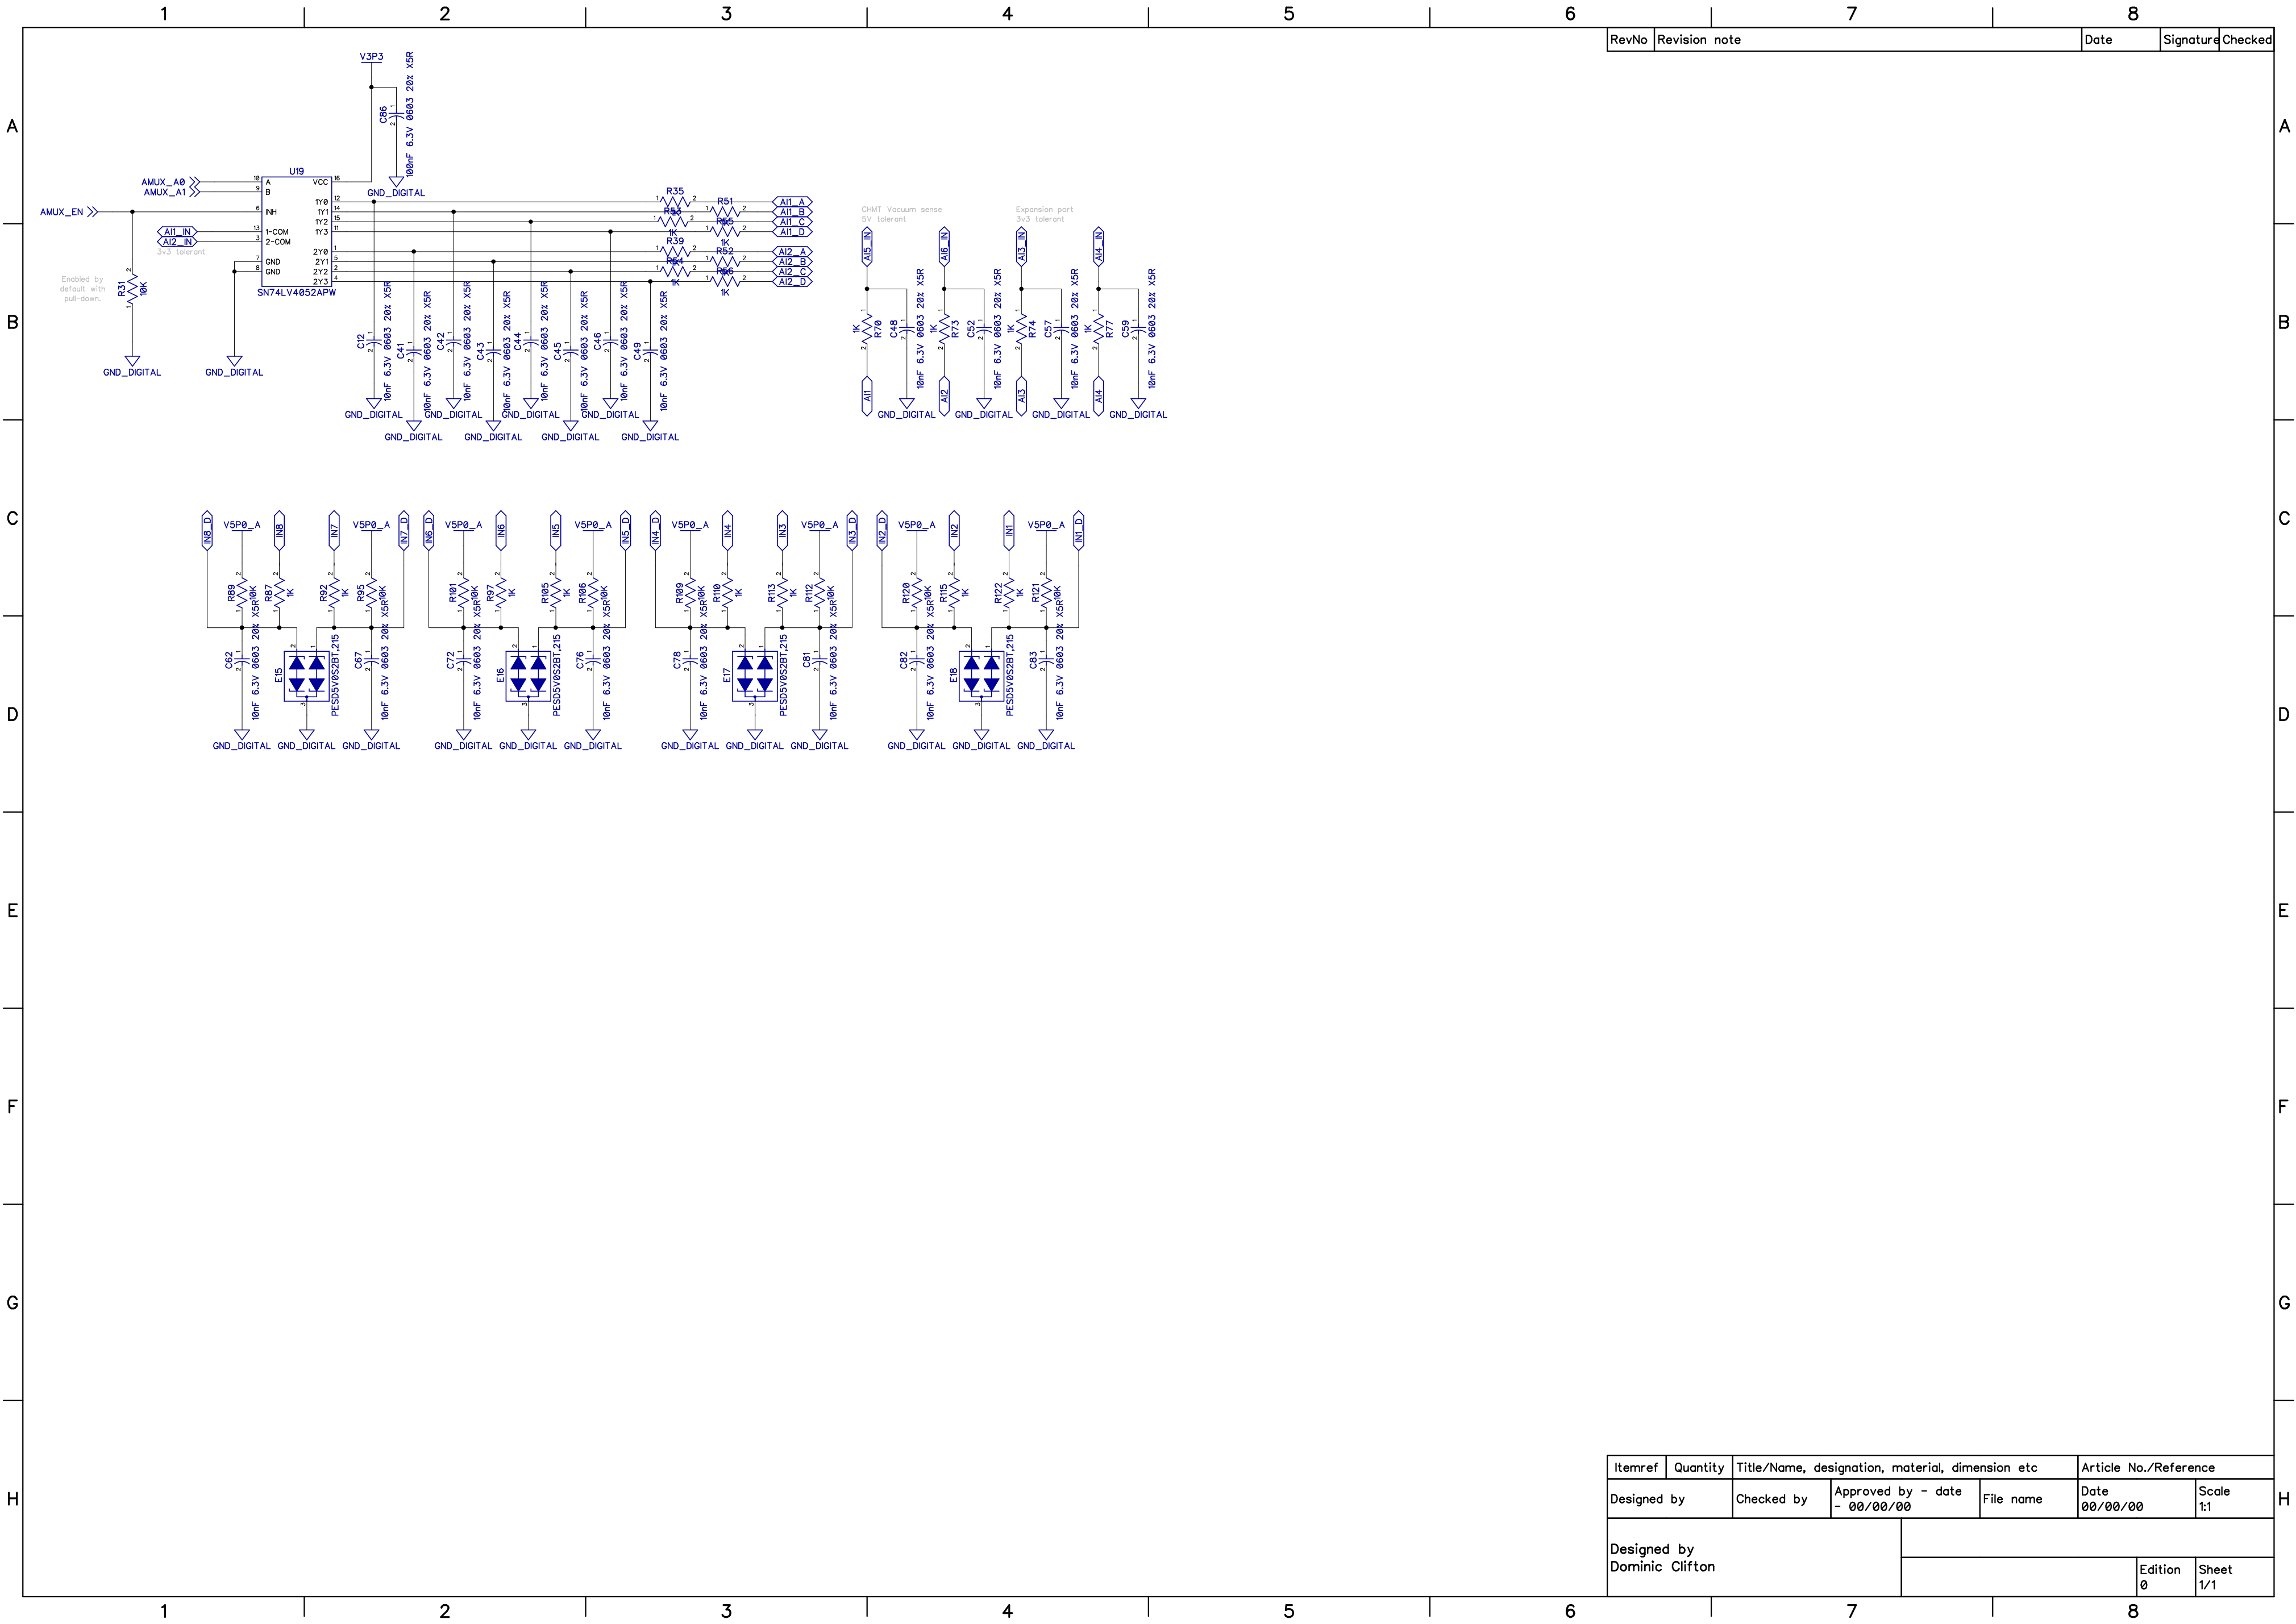

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------


Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by		Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1
Designed by Dominic Clifton						
					Edition 0	Sheet 1/1

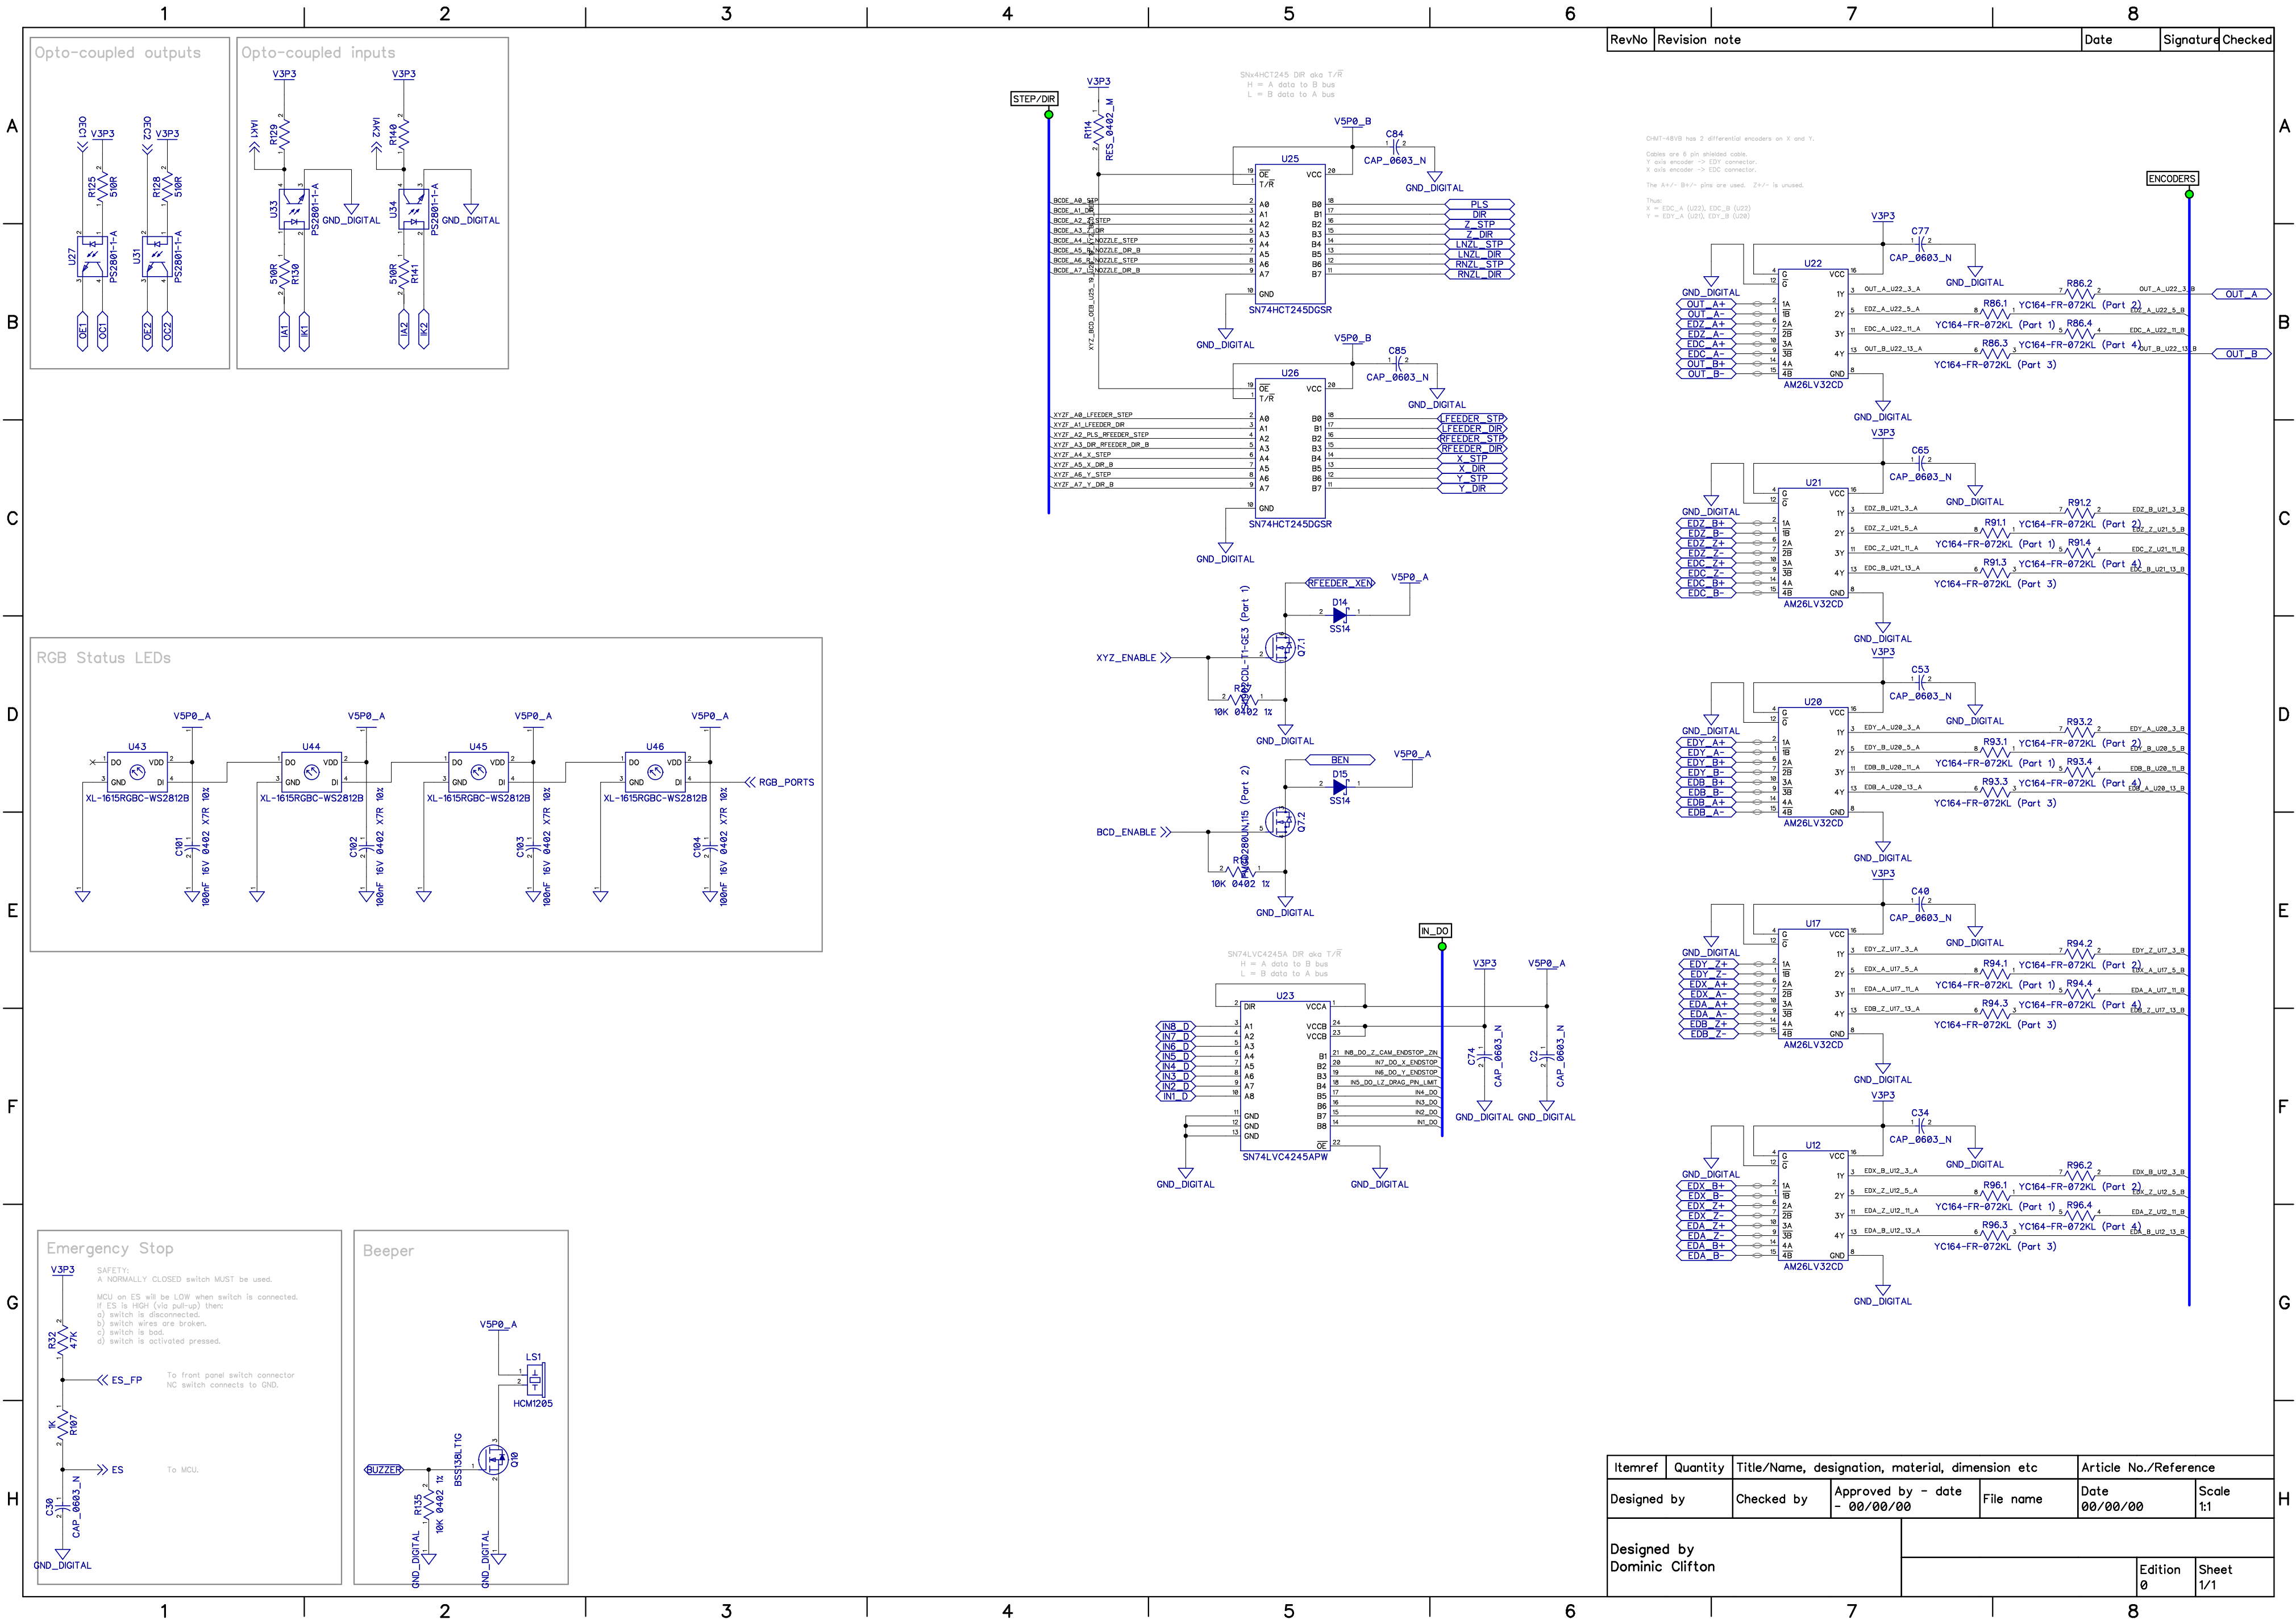

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

GM7-48Vb has 2 differential encoders on X and Y.
Cables are 6 pin shielded cables.
Y axis encoder -> EDC connector.
X axis encoder -> EDC connector.
The A+/- B+/- pins are used. Z+/- is unused.
Thus:
X = EDC_A (U22), EDC_B (U23)
Y = EDC_Y (U21), EDC_Z (U24)

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by		Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1
Designed by Dominic Clifton						
					Edition 0	Sheet 1/1

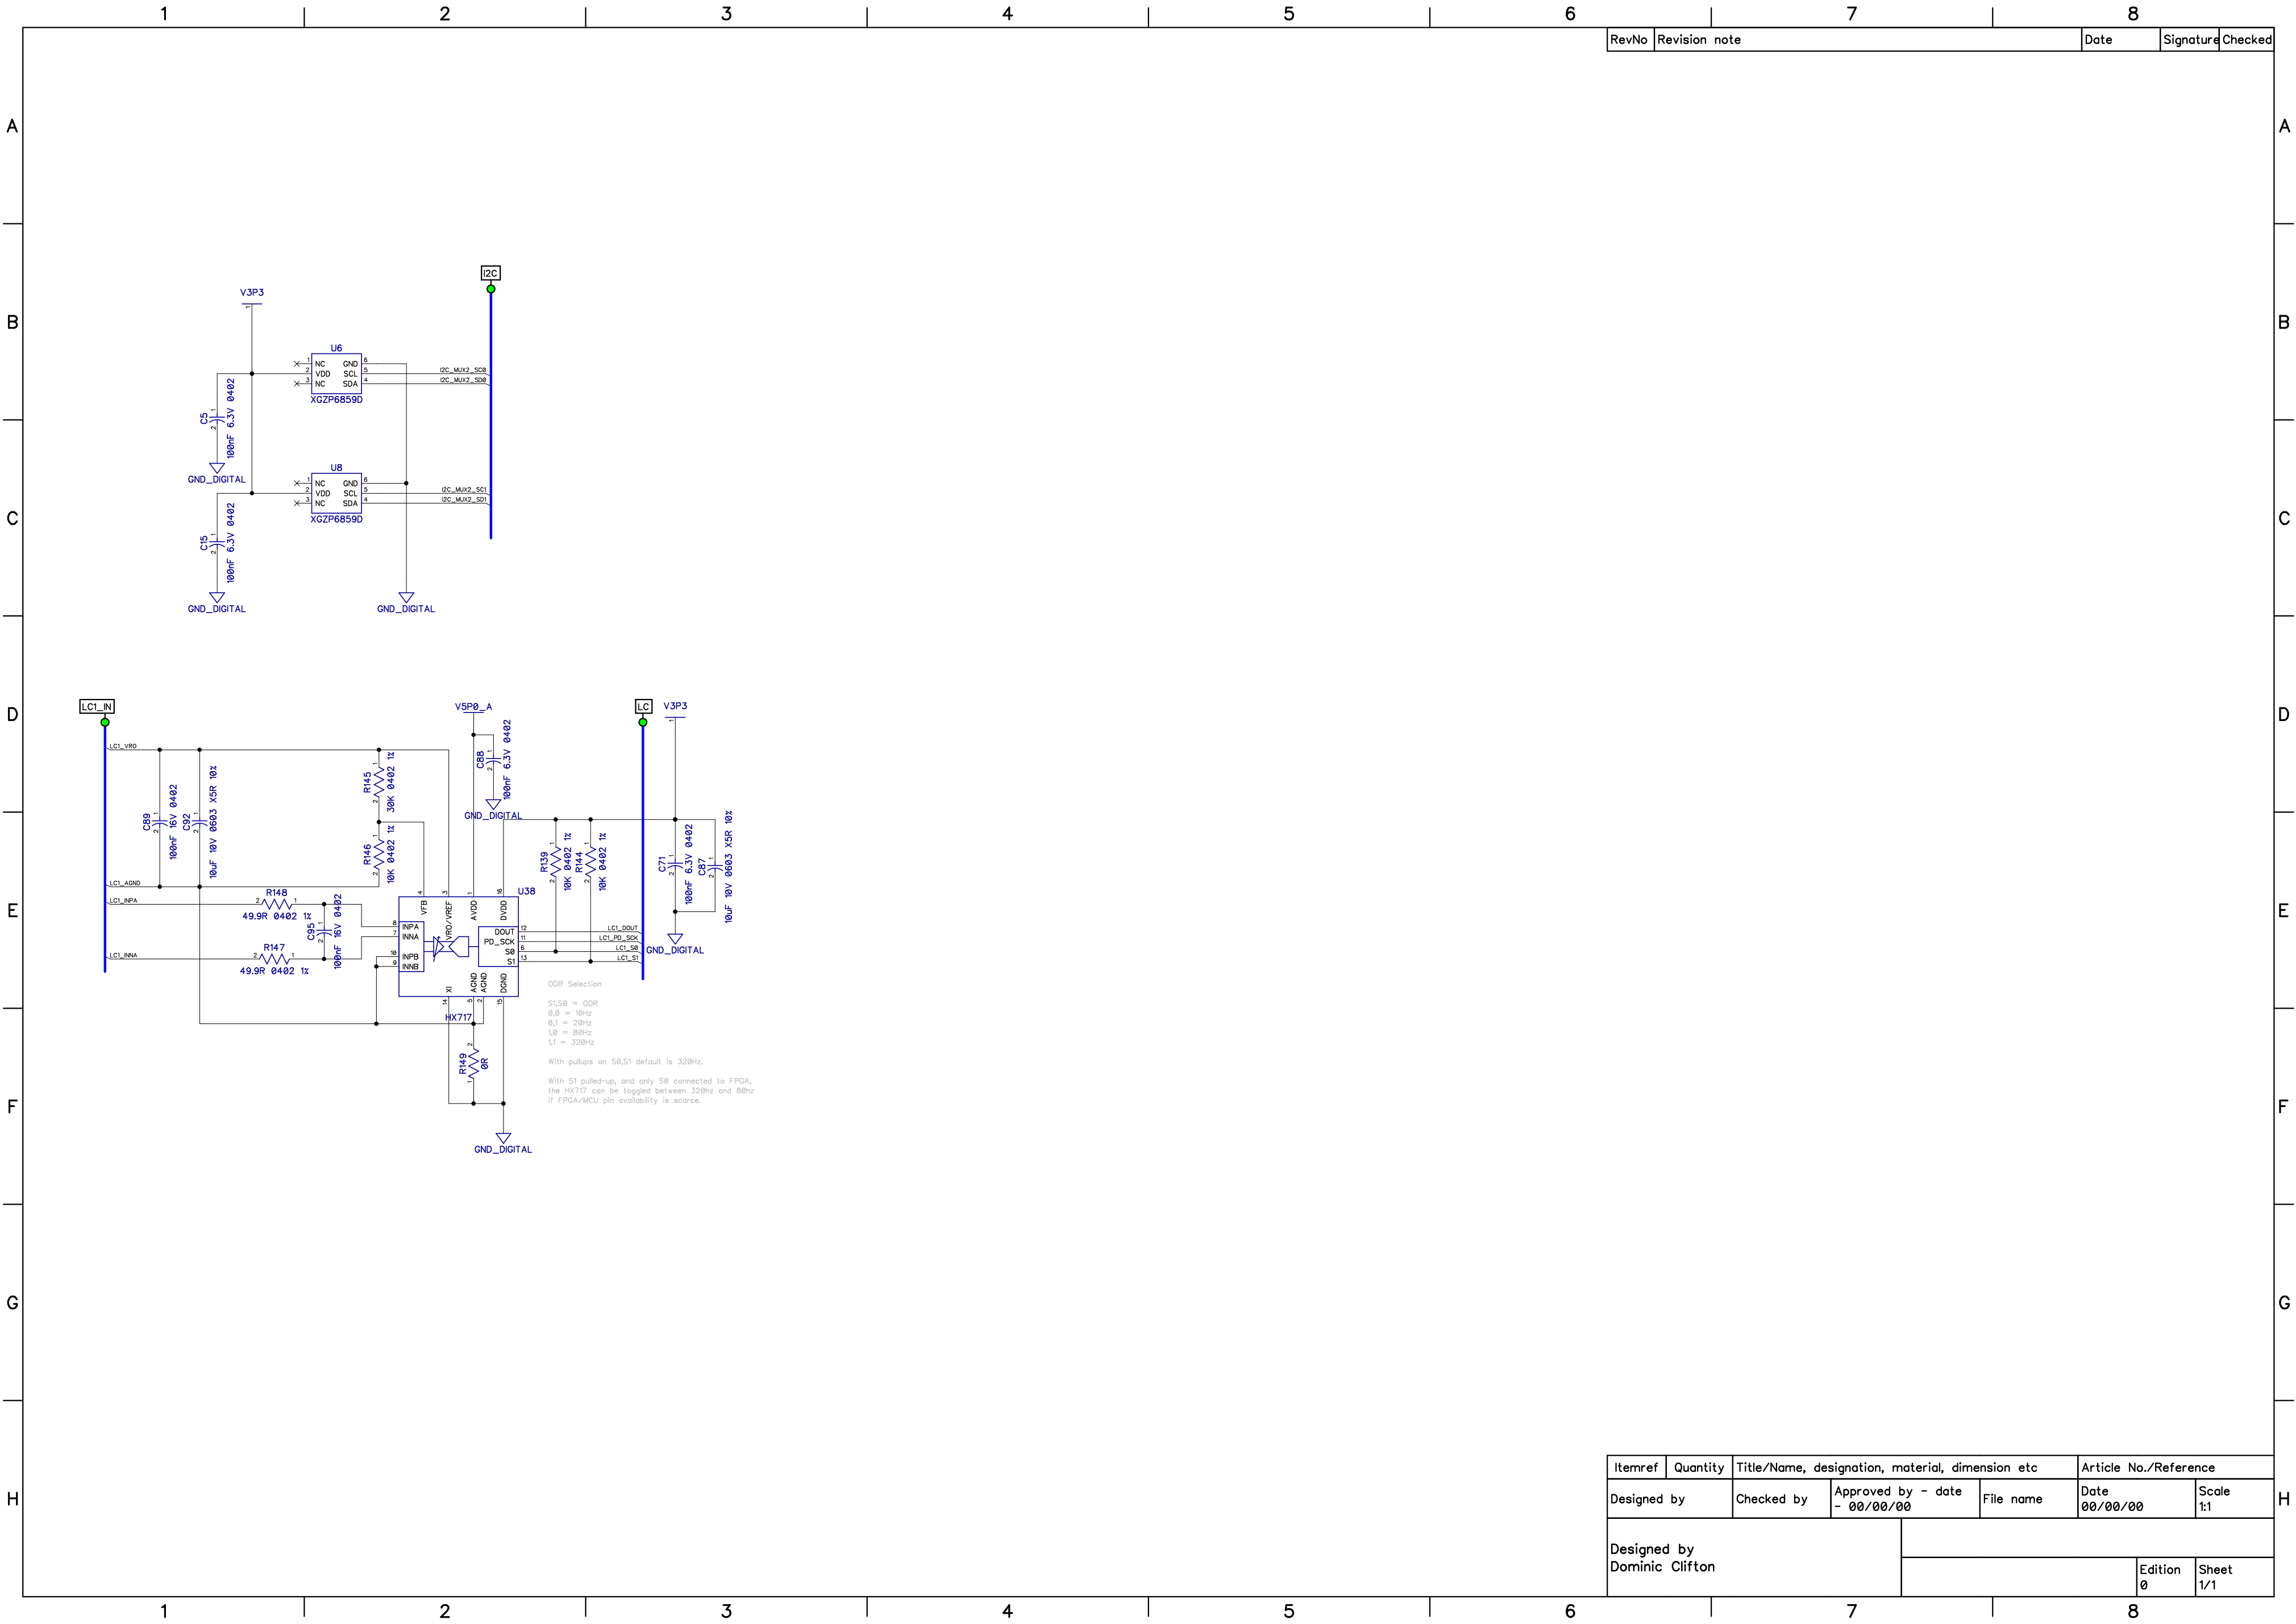

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

Designed by	Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1
Designed by Dominic Clifton					
			Edition 0	Sheet 1/1	