

12345678

RevNo

Revision note

Date

Signature

Checked

A

TODO

* Load-cell amplifier (HX717)

* CAN termination jumpers.

* Check courtyards of components.

* Diode footprints/model

* upgrade OT1-6 Dual MOSFETs

B

MAYBE

* connector for front-panel USB socket - should probably go to raspberry-pi - need a small break-out PCB in that case.

* reverse polarity protection, need multiple high-current fets like SUD50P06-15-GE3.

* VUSB sense input.

C

DONE

* Additional 5V rail for onboard and up-lights.

* Raspberry Pi 5 power connector

* Supercap/RTC osc - deleted.

* Models for JST-XH (e.g 'B4B-XH-A(LF)(SN)')

* Ethernet PHY

* MOSFET + connector for external ethernet link leds.

* 3V3 power from core board

* LEDs for power rails.

* RGB LED output, for up-lights

* 2x vacuum sensors.

* Head RS422 (non-isolated power).

* Analog mux (2x1 in 4 out).

D

E

F

G

H

Itemref

Quantity

Title/Name, designation, material, dimension etc

Article No./Reference

Designed by

Checked by

Approved by - date
- 00/00/00

File name

Date
00/00/00


Scale
1:1

Designed by
Dominic Clifton

Edition
0

Sheet
1/1




12345678

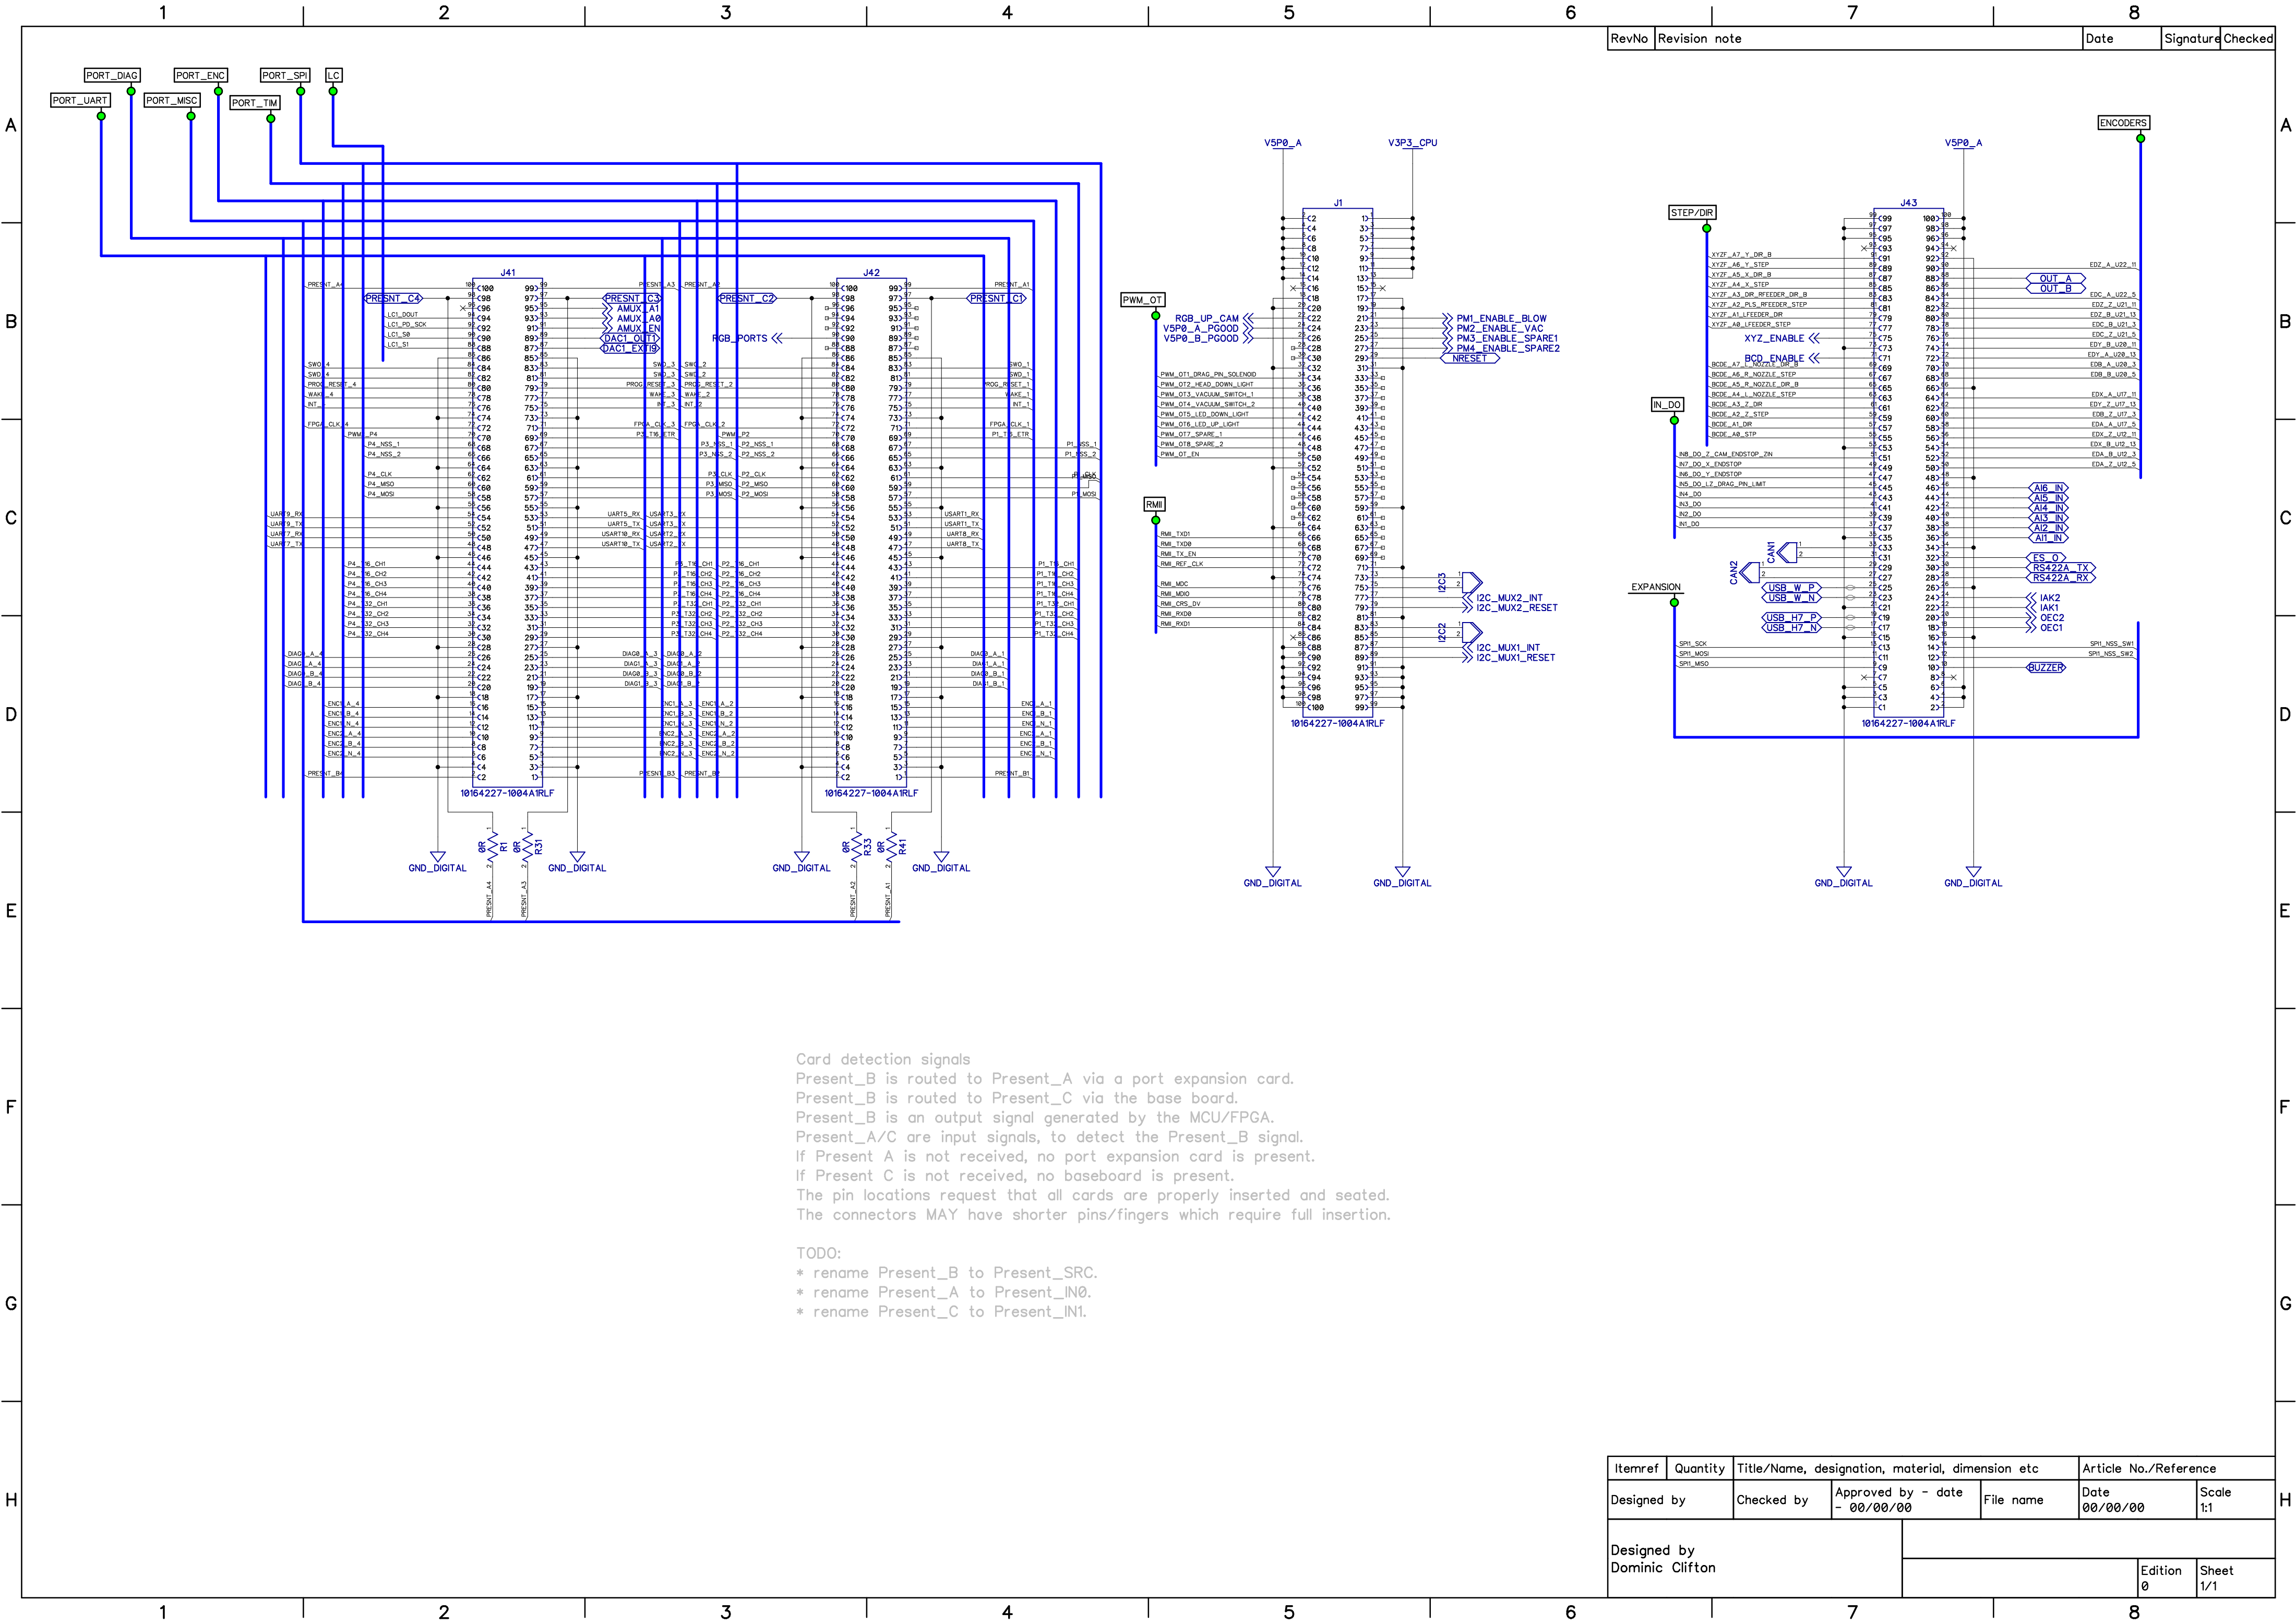


Card detection signals
Present_B is routed to Present_A via a port expansion card.
Present_B is routed to Present_C via the base board.
Present_B is an output signal generated by the MCU/FPGA.
Present_A/C are input signals, to detect the Present_B signal.
If Present A is not received, no port expansion card is present.
If Present C is not received, no baseboard is present.
The pin locations request that all cards are properly inserted and seated.
The connectors MAY have shorter pins/fingers which require full insertion.

TODO:
* rename Present_B to Present_SRC.
* rename Present_A to Present_IN0.
* rename Present_C to Present_IN1.

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
Designed by Dominic Clifton				00/00/00	1:1	
				Edition	Sheet	
				0	1/1	

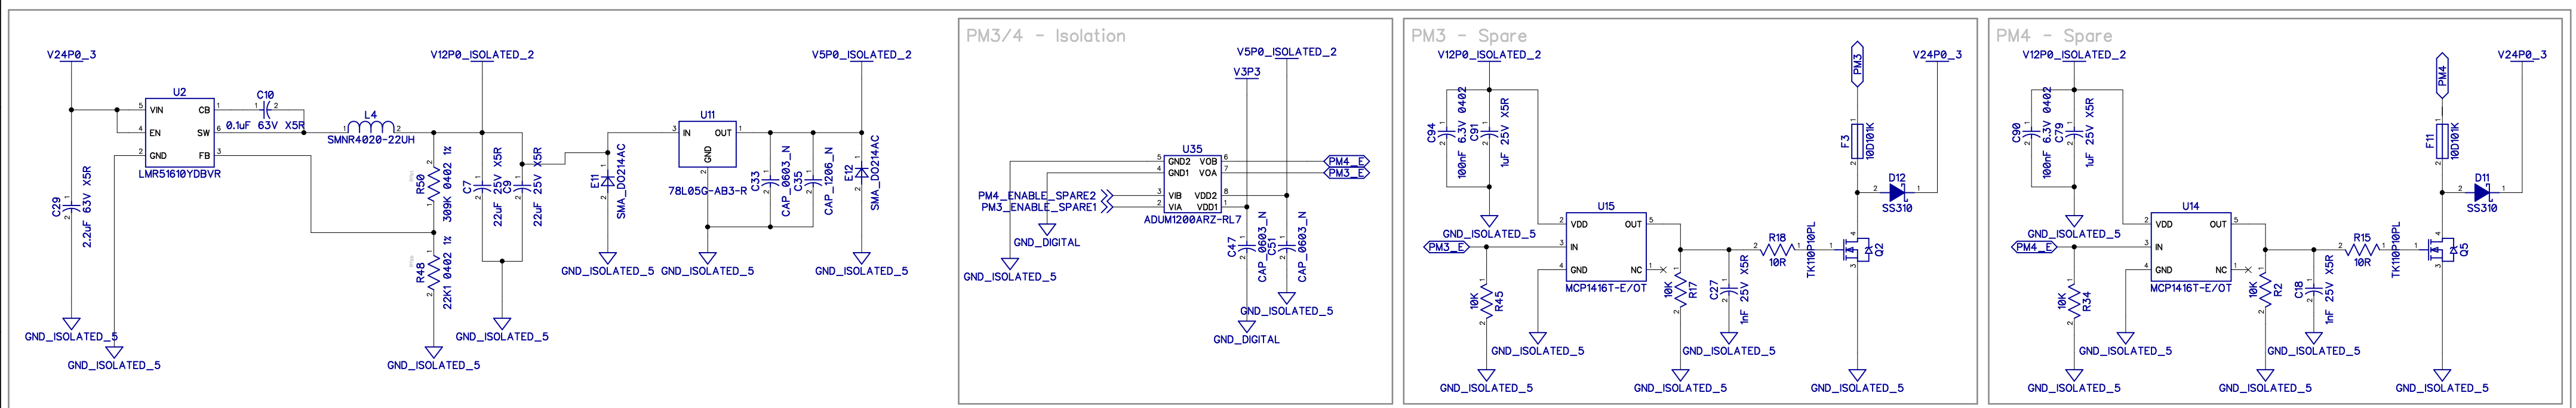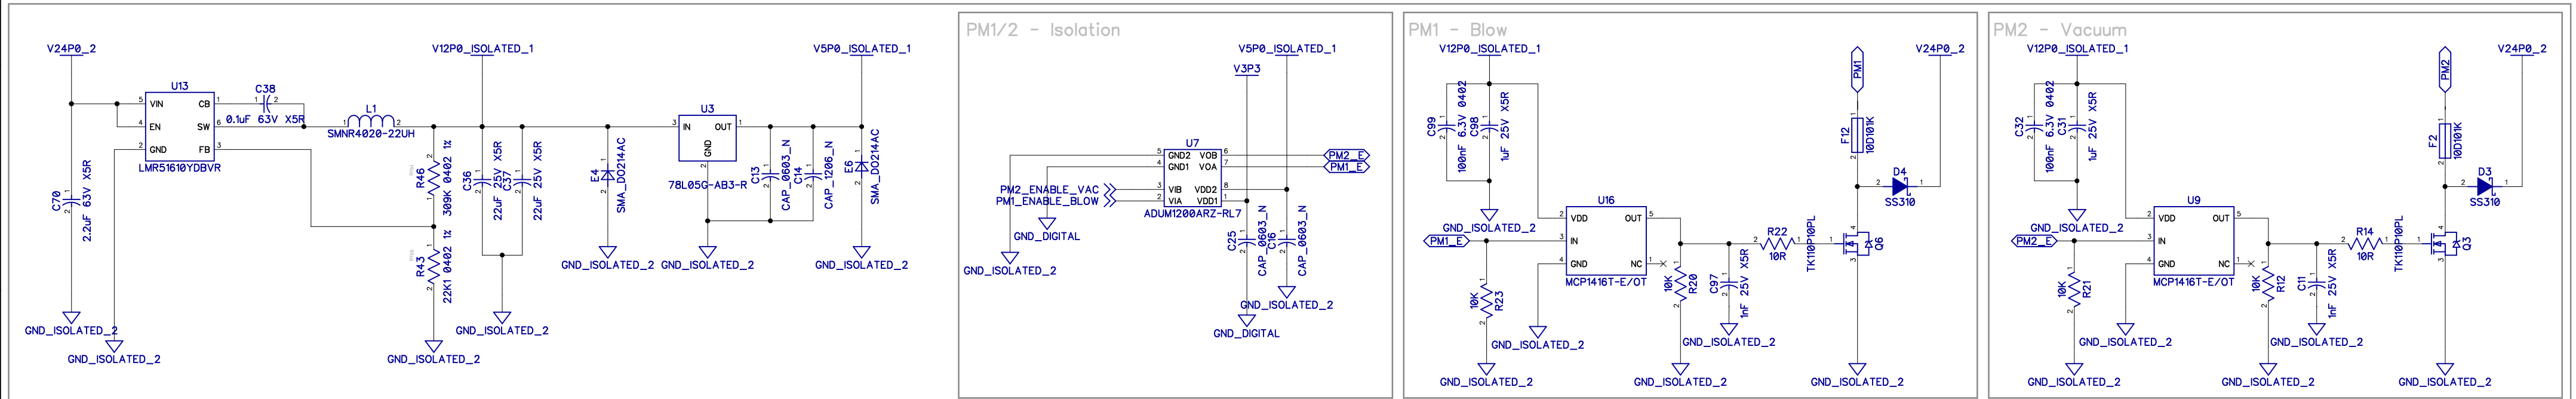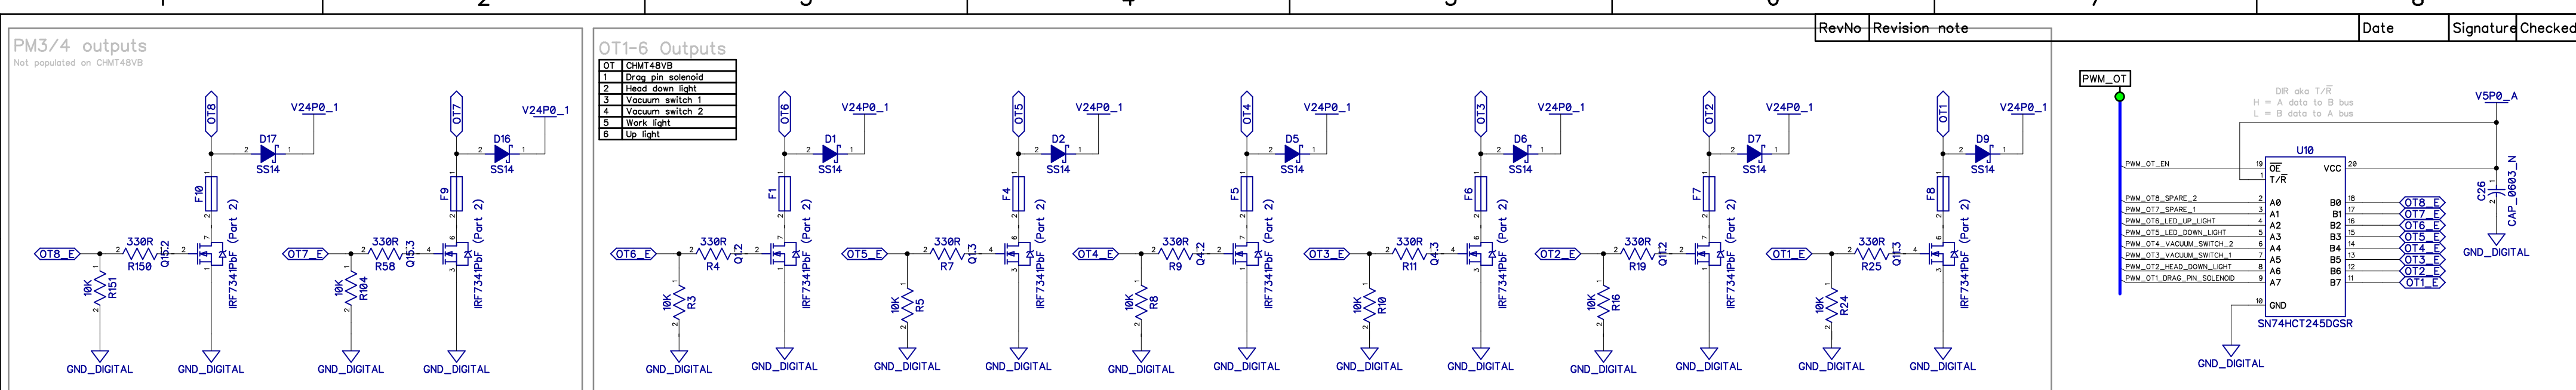

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by		Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1
Designed by Dominic Clifton						
					Edition 0	Sheet 1/1

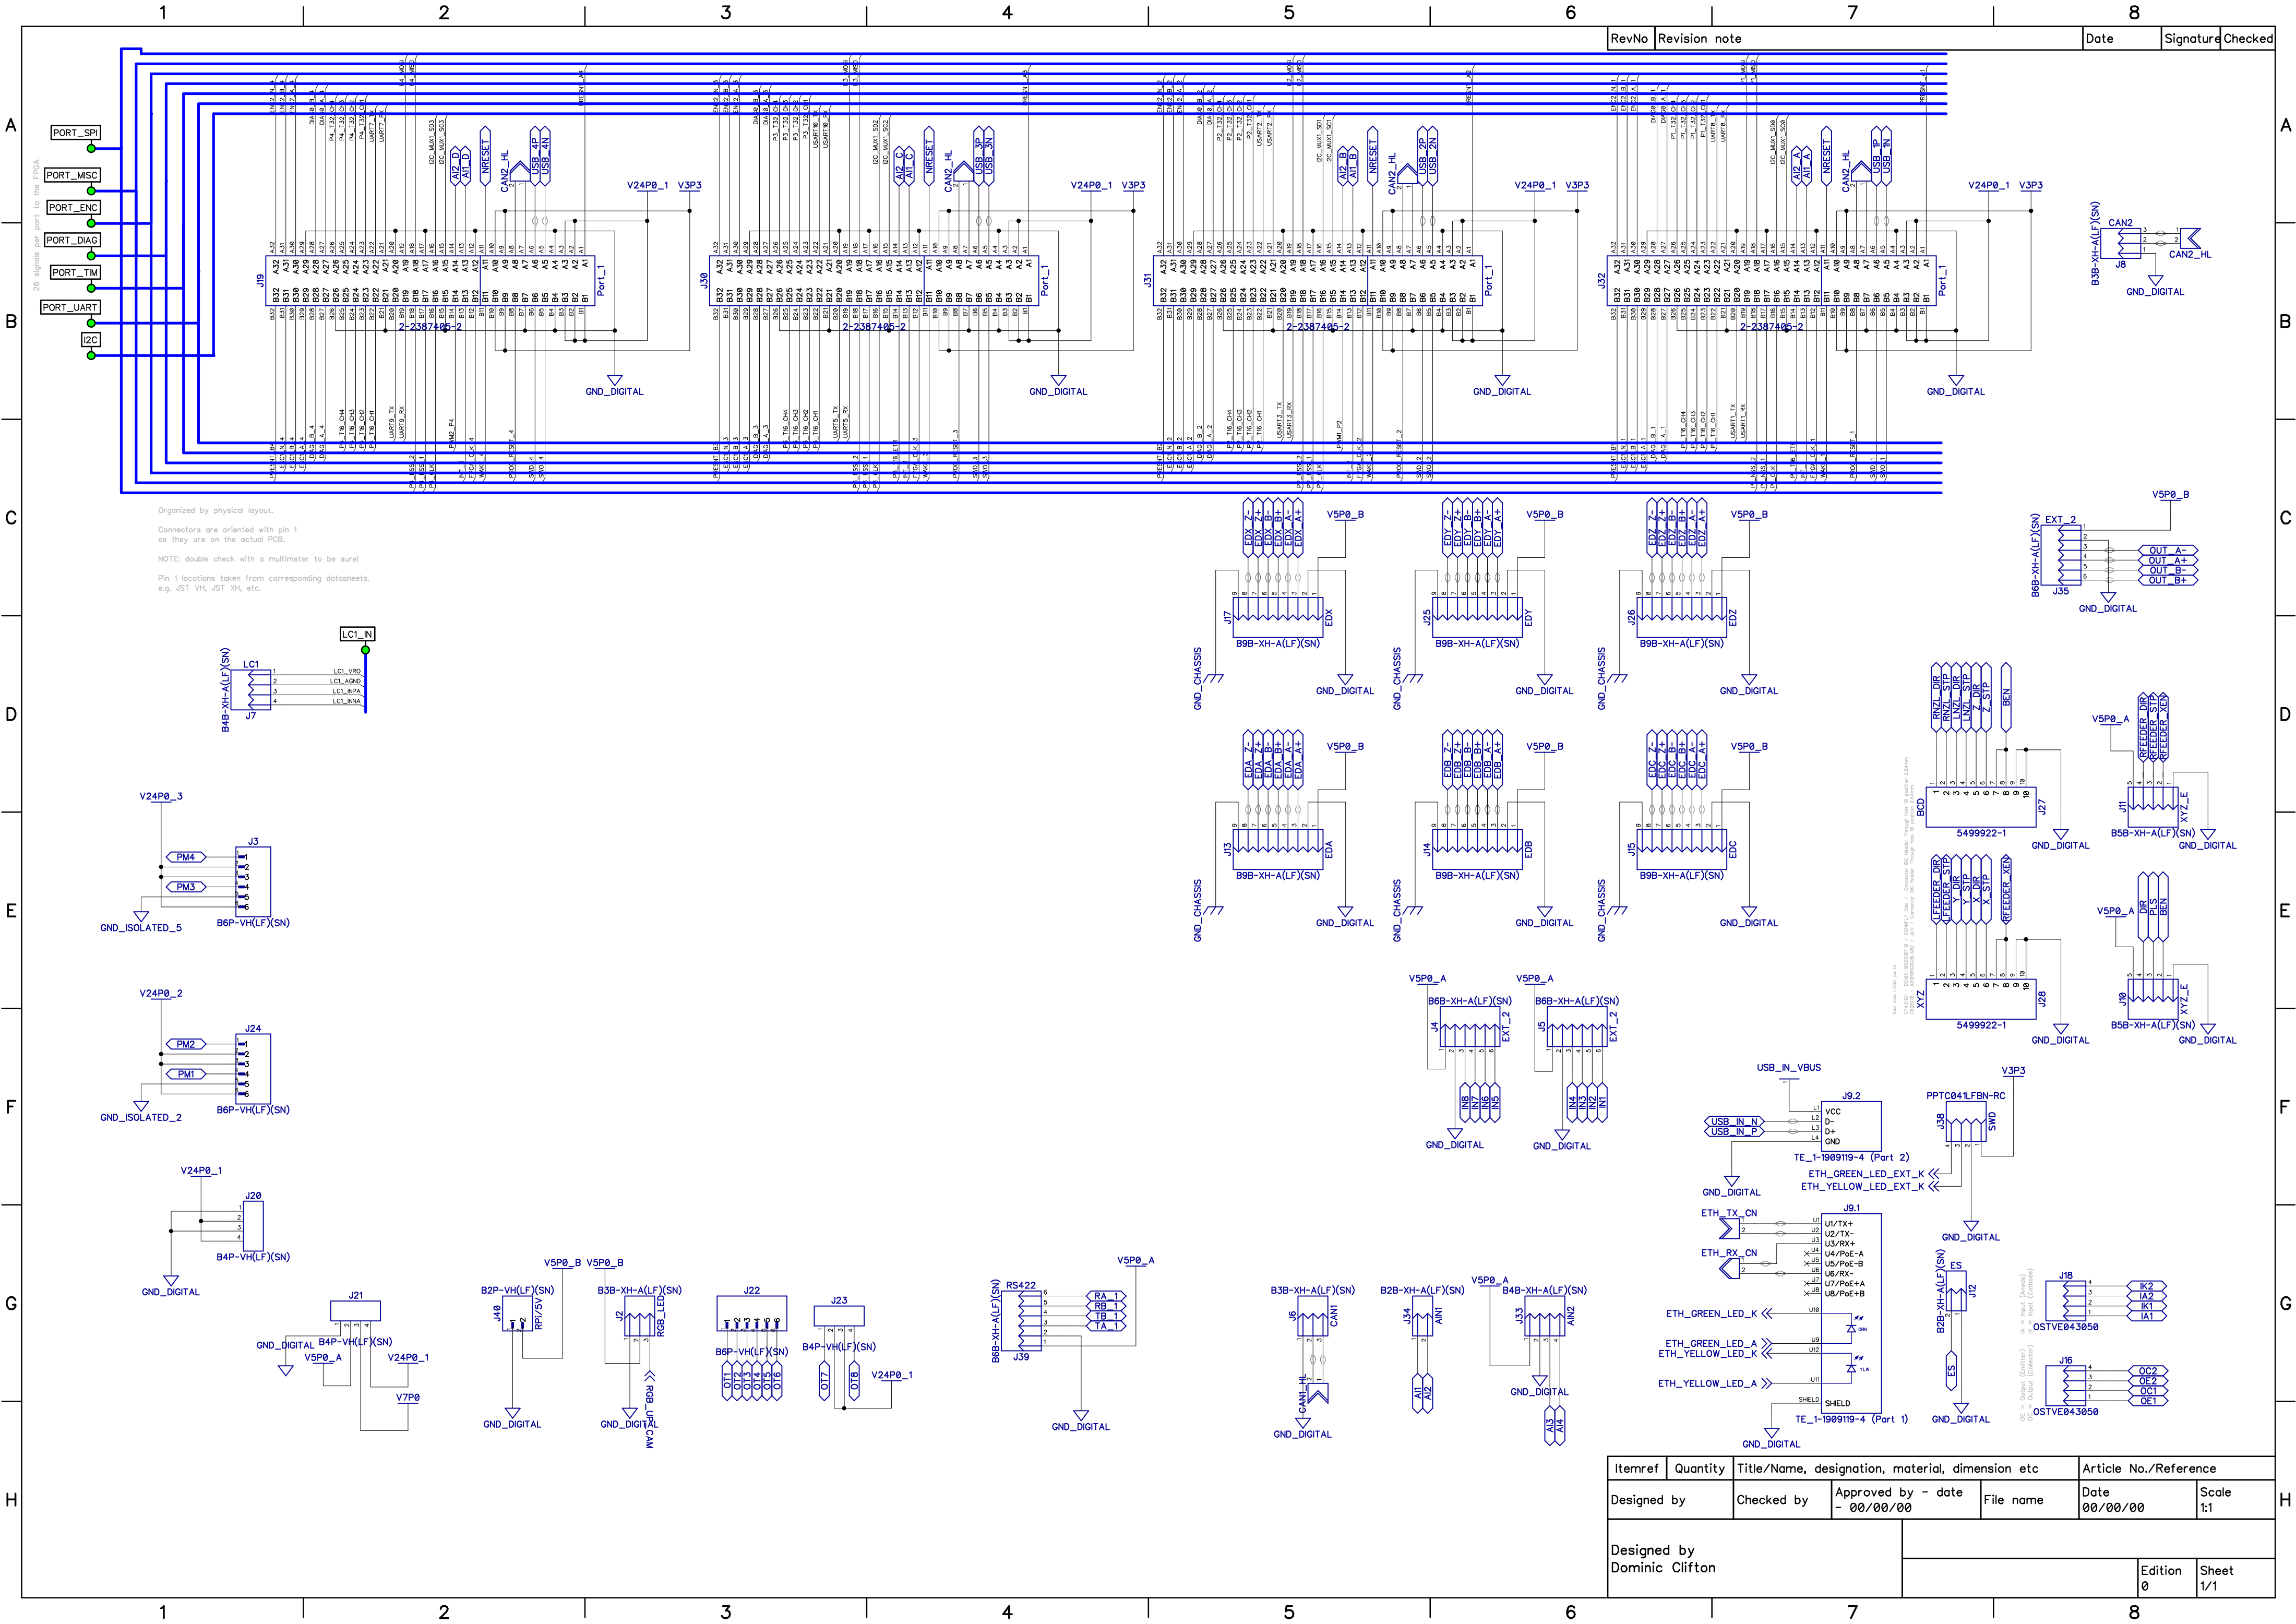

Organized by physical layout.


Connectors are oriented with pin 1 as they are on the actual PCB.

NOTE: double check with a multimeter to be sure!




Pin 1 locations taken from corresponding datasheets, e.g. JST VH, JST XH, etc.

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------


Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by		Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1
Designed by Dominic Clifton						
						Edition 0

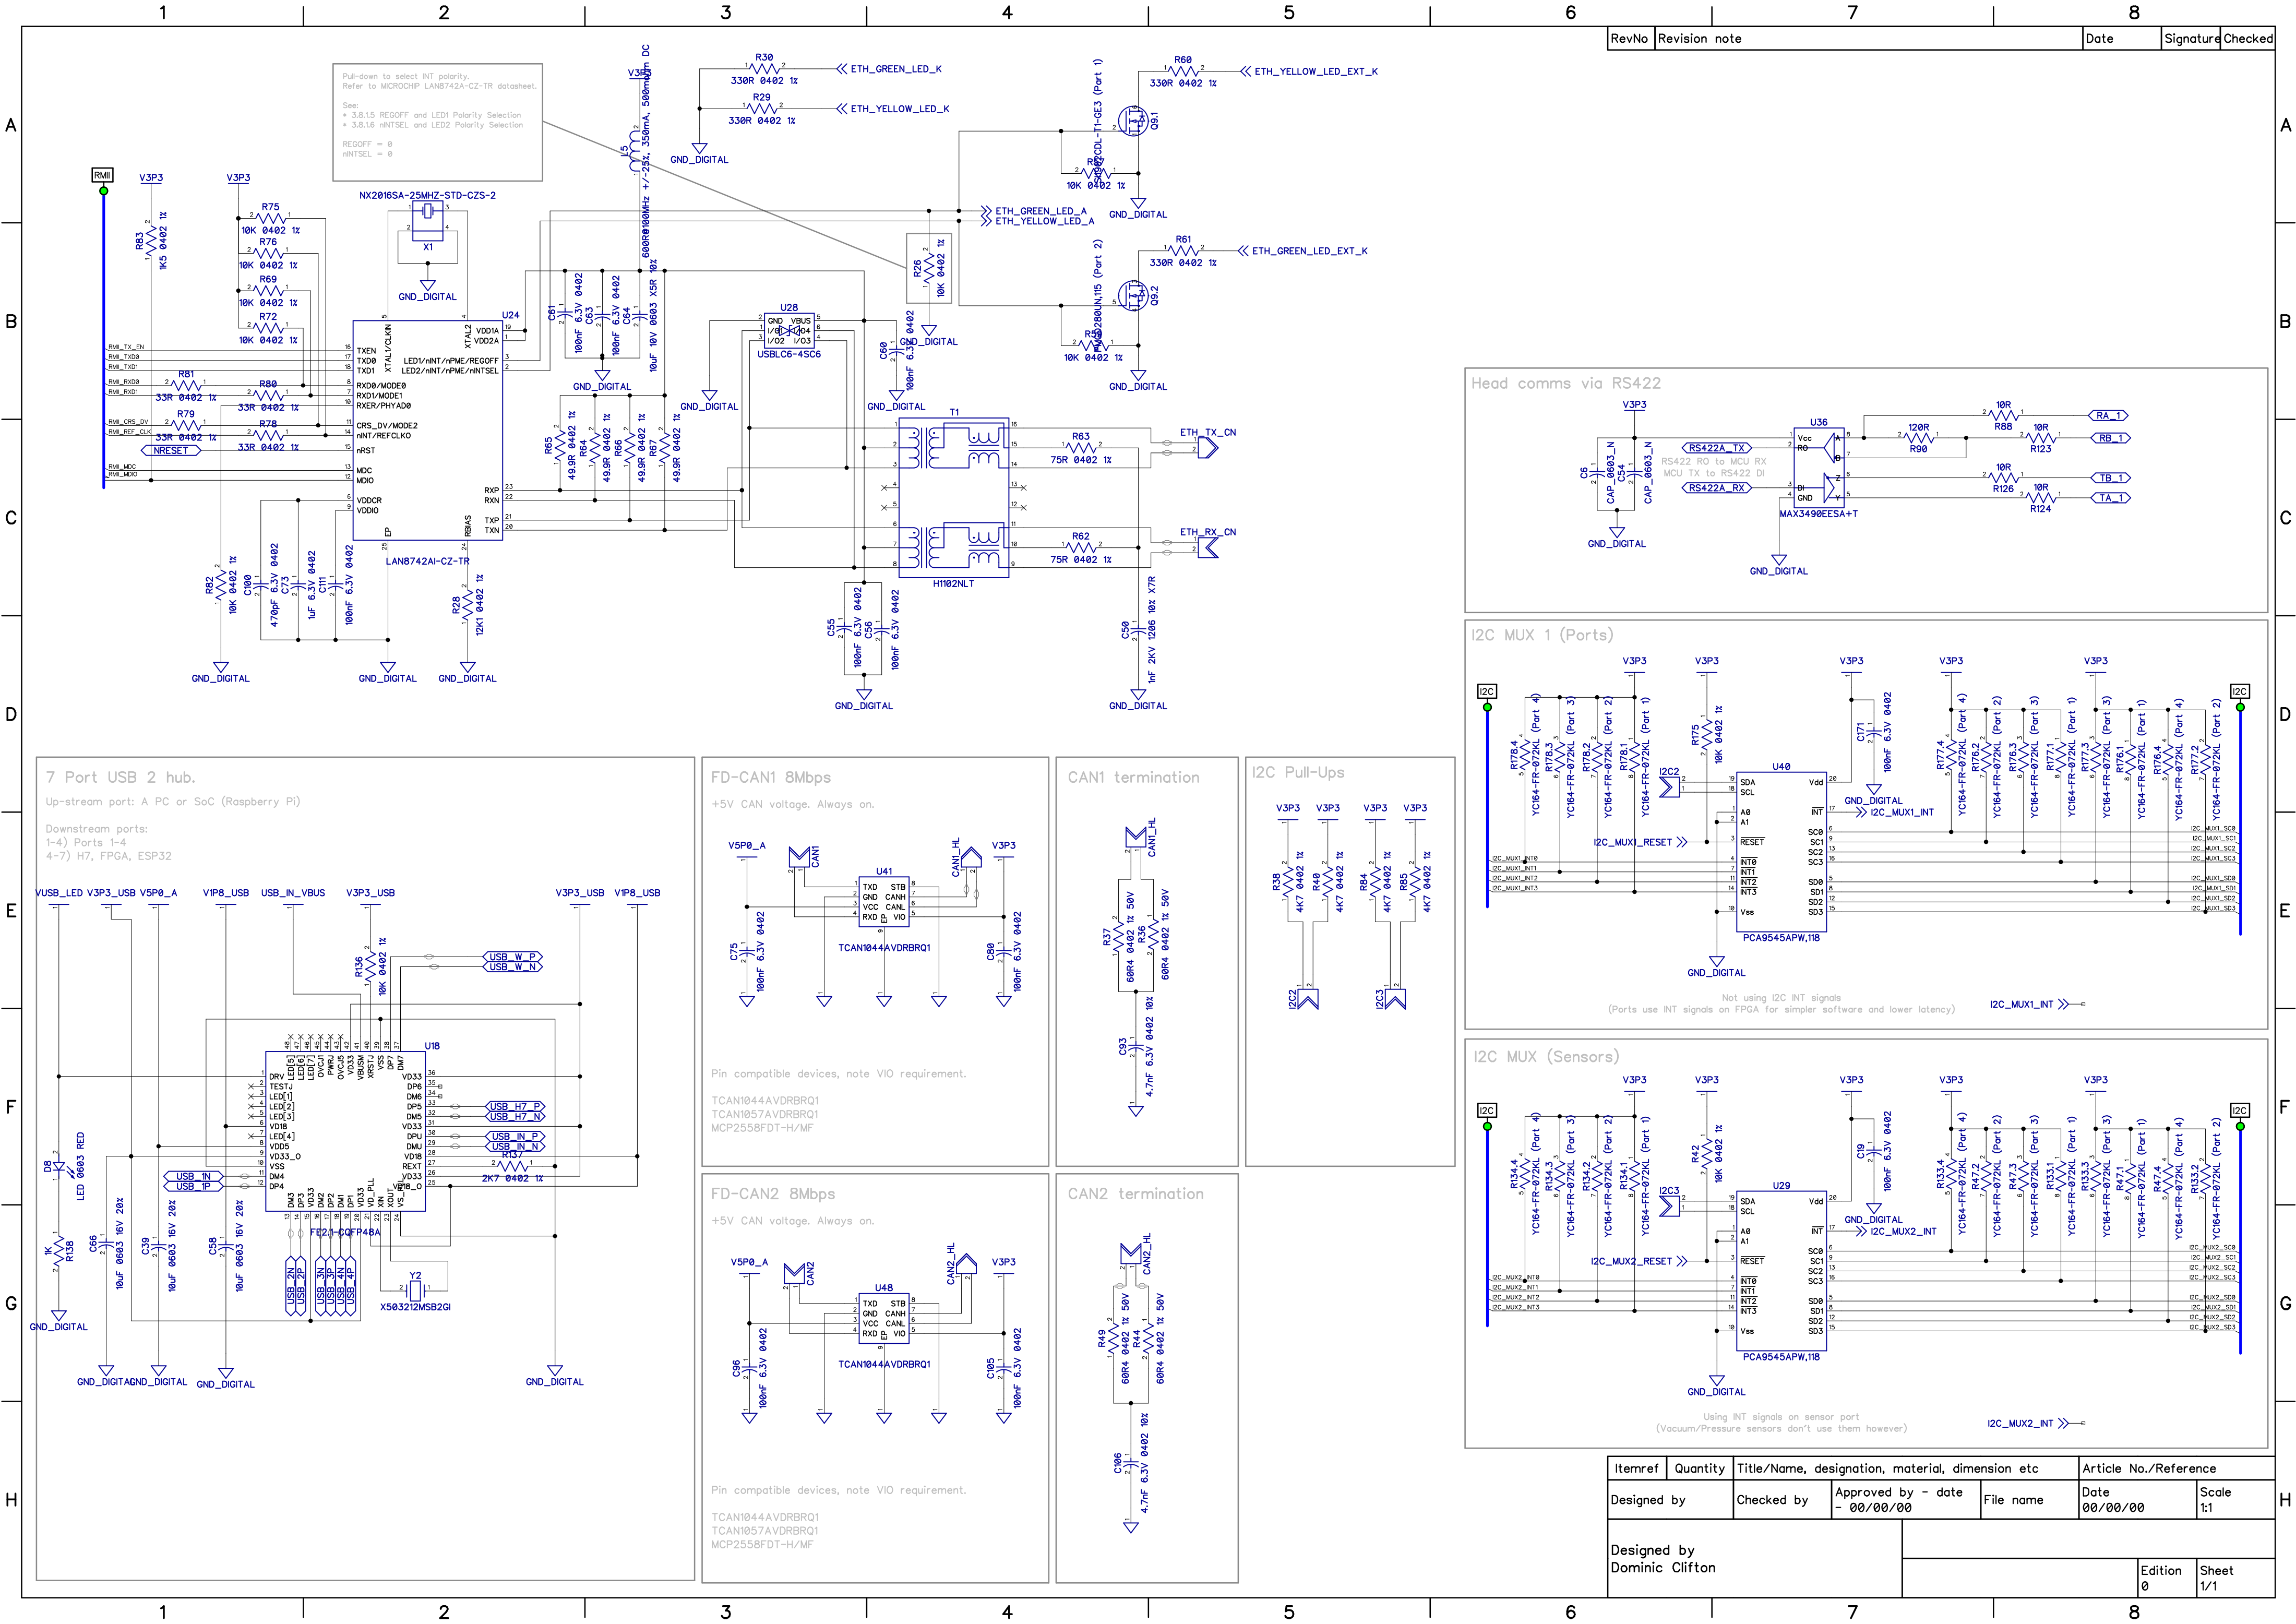


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

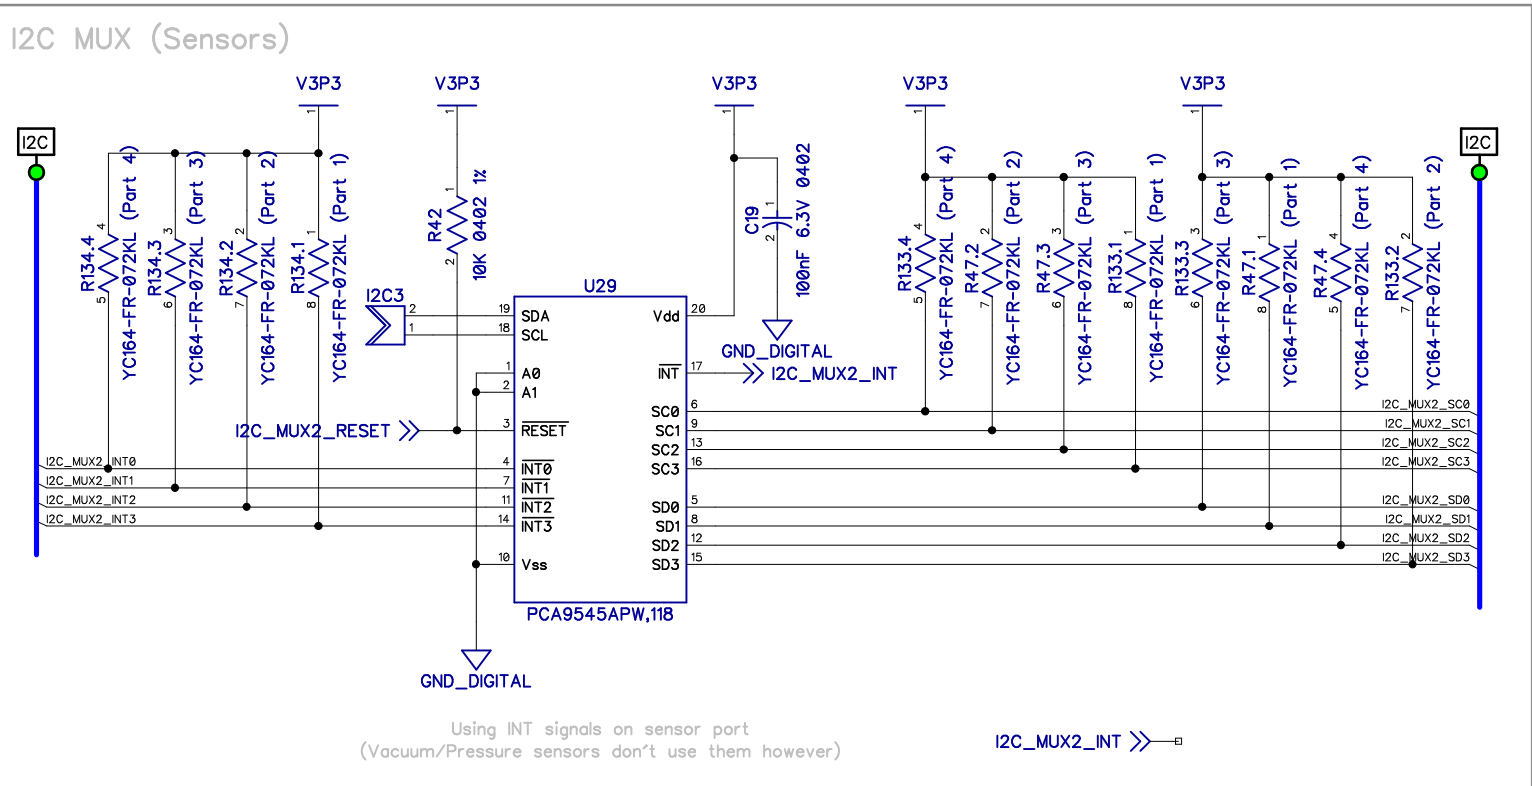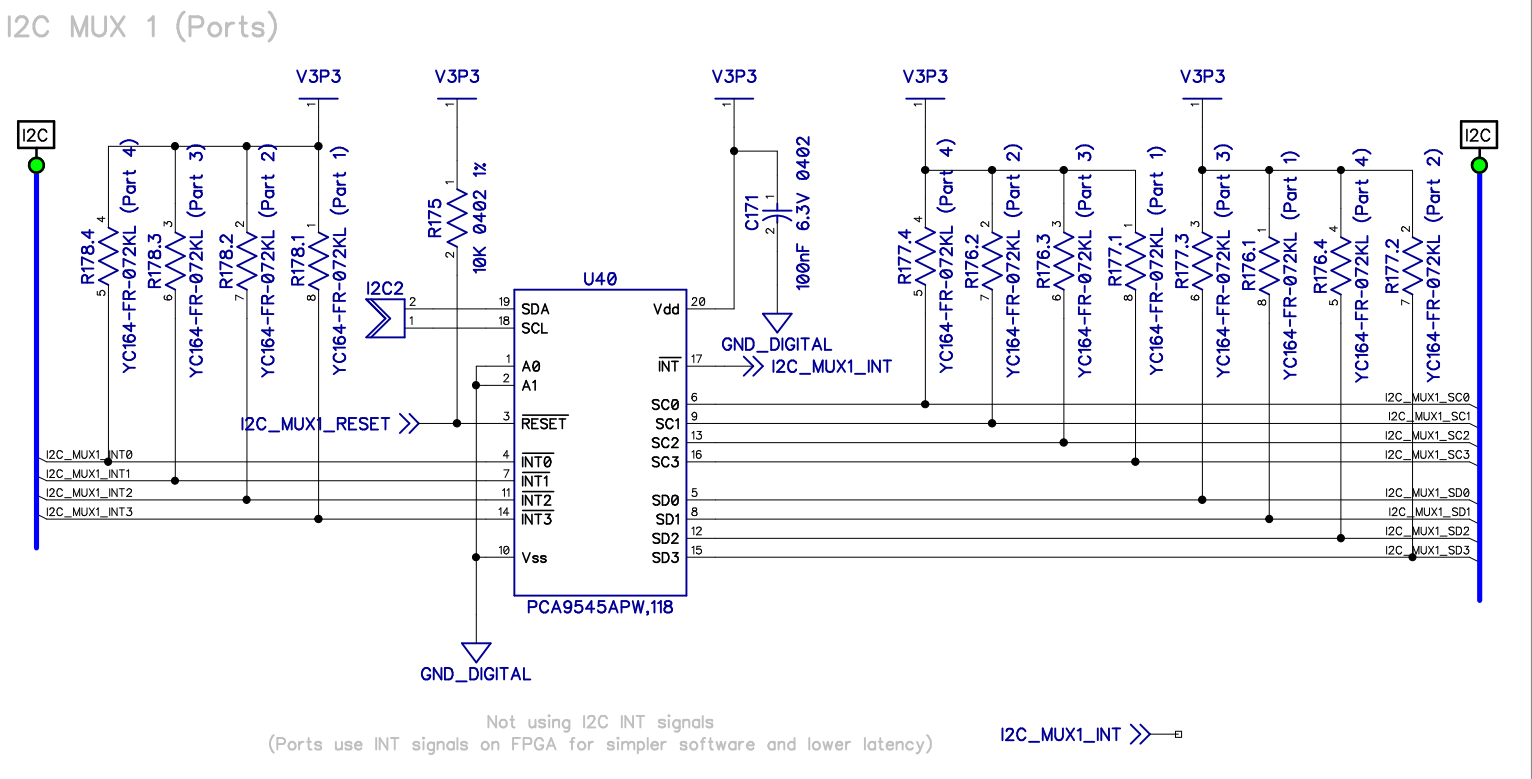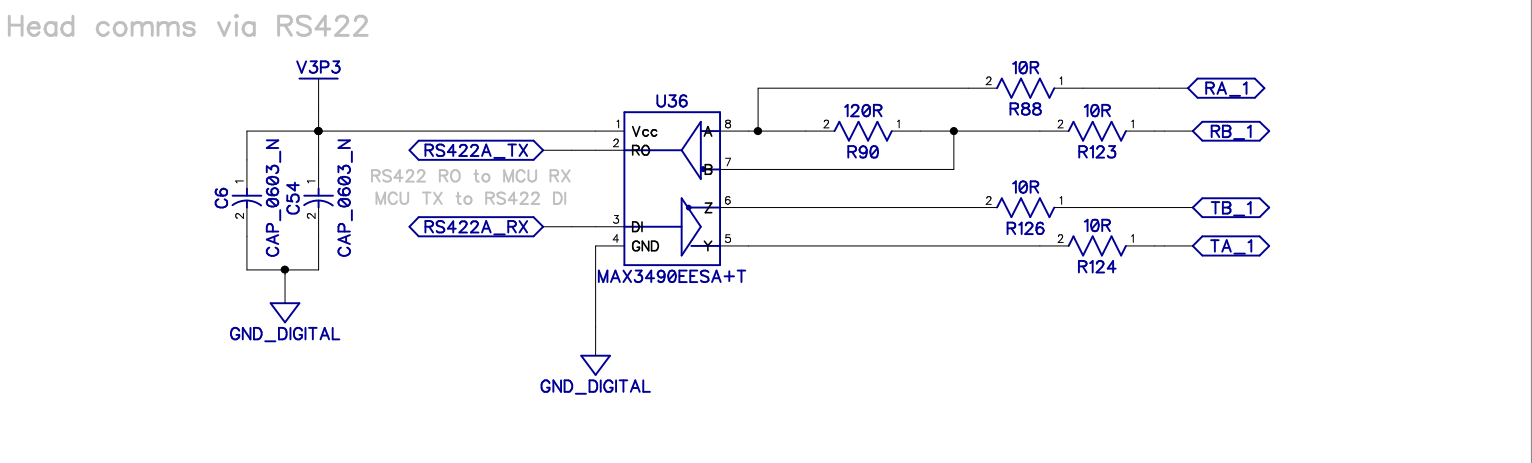

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
Designed by Dominic Clifton		00/00/00		00/00/00	1:1	
				Edition	Sheet	
				0	1/1	

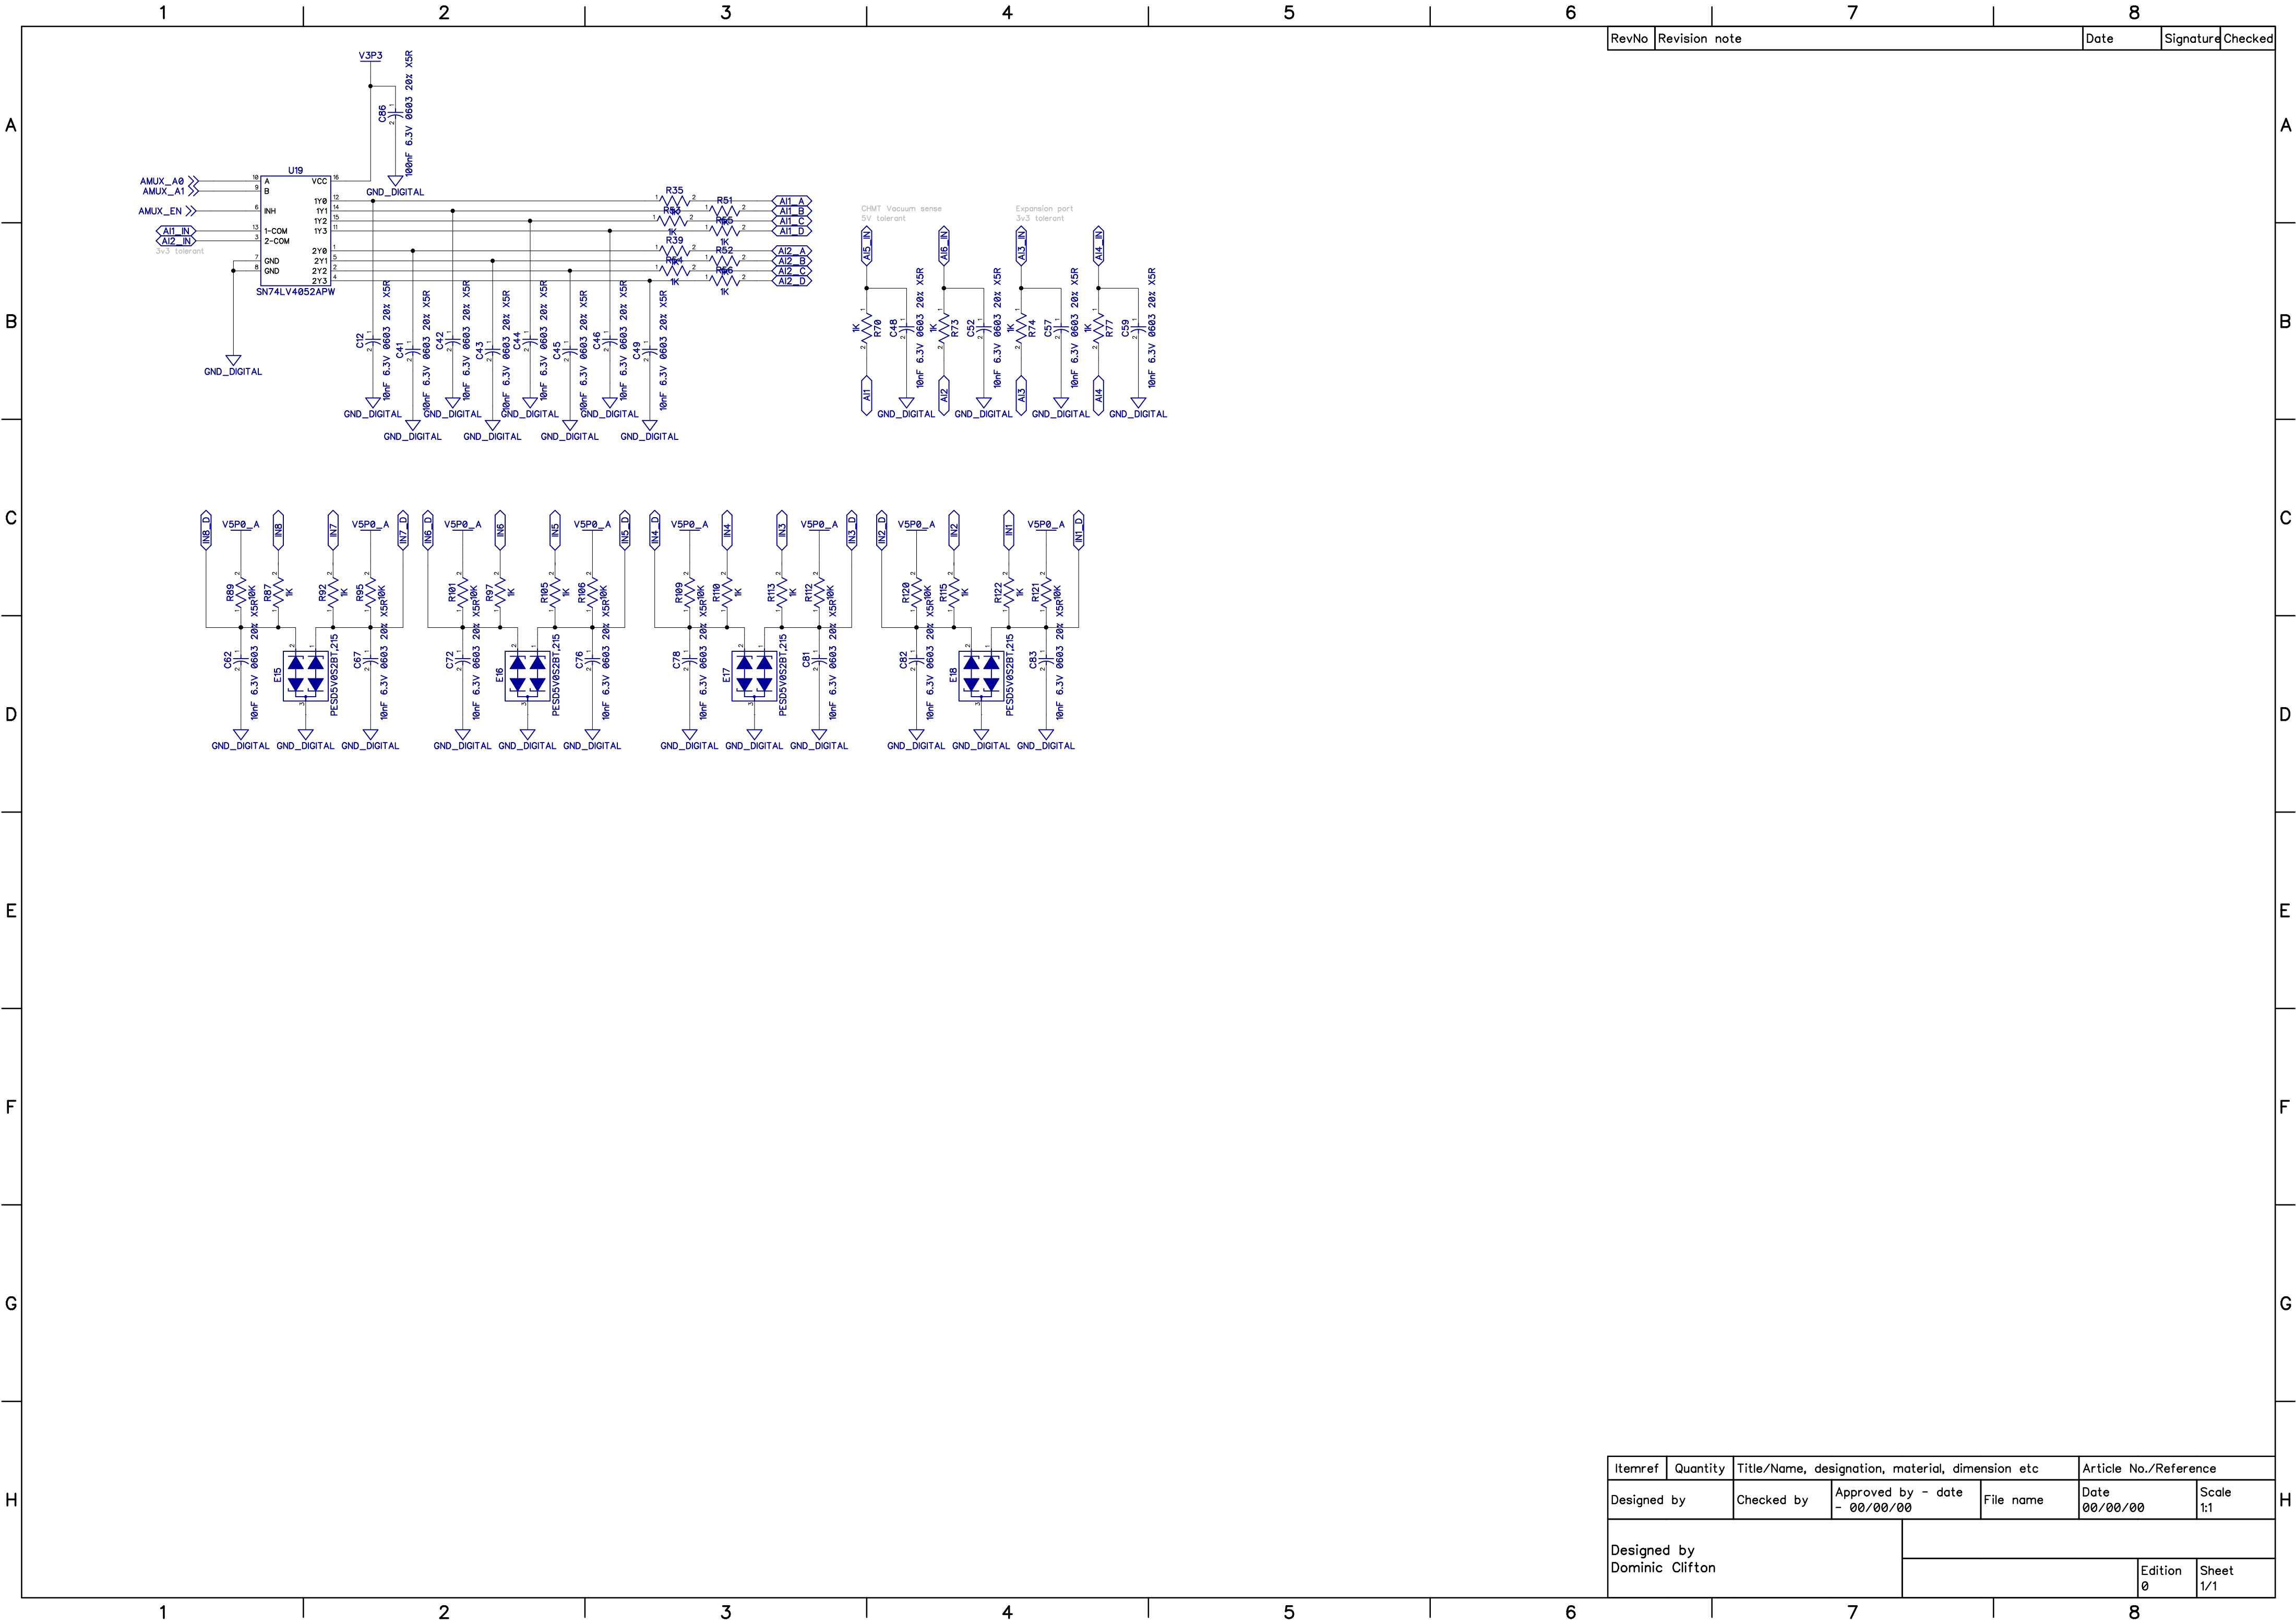

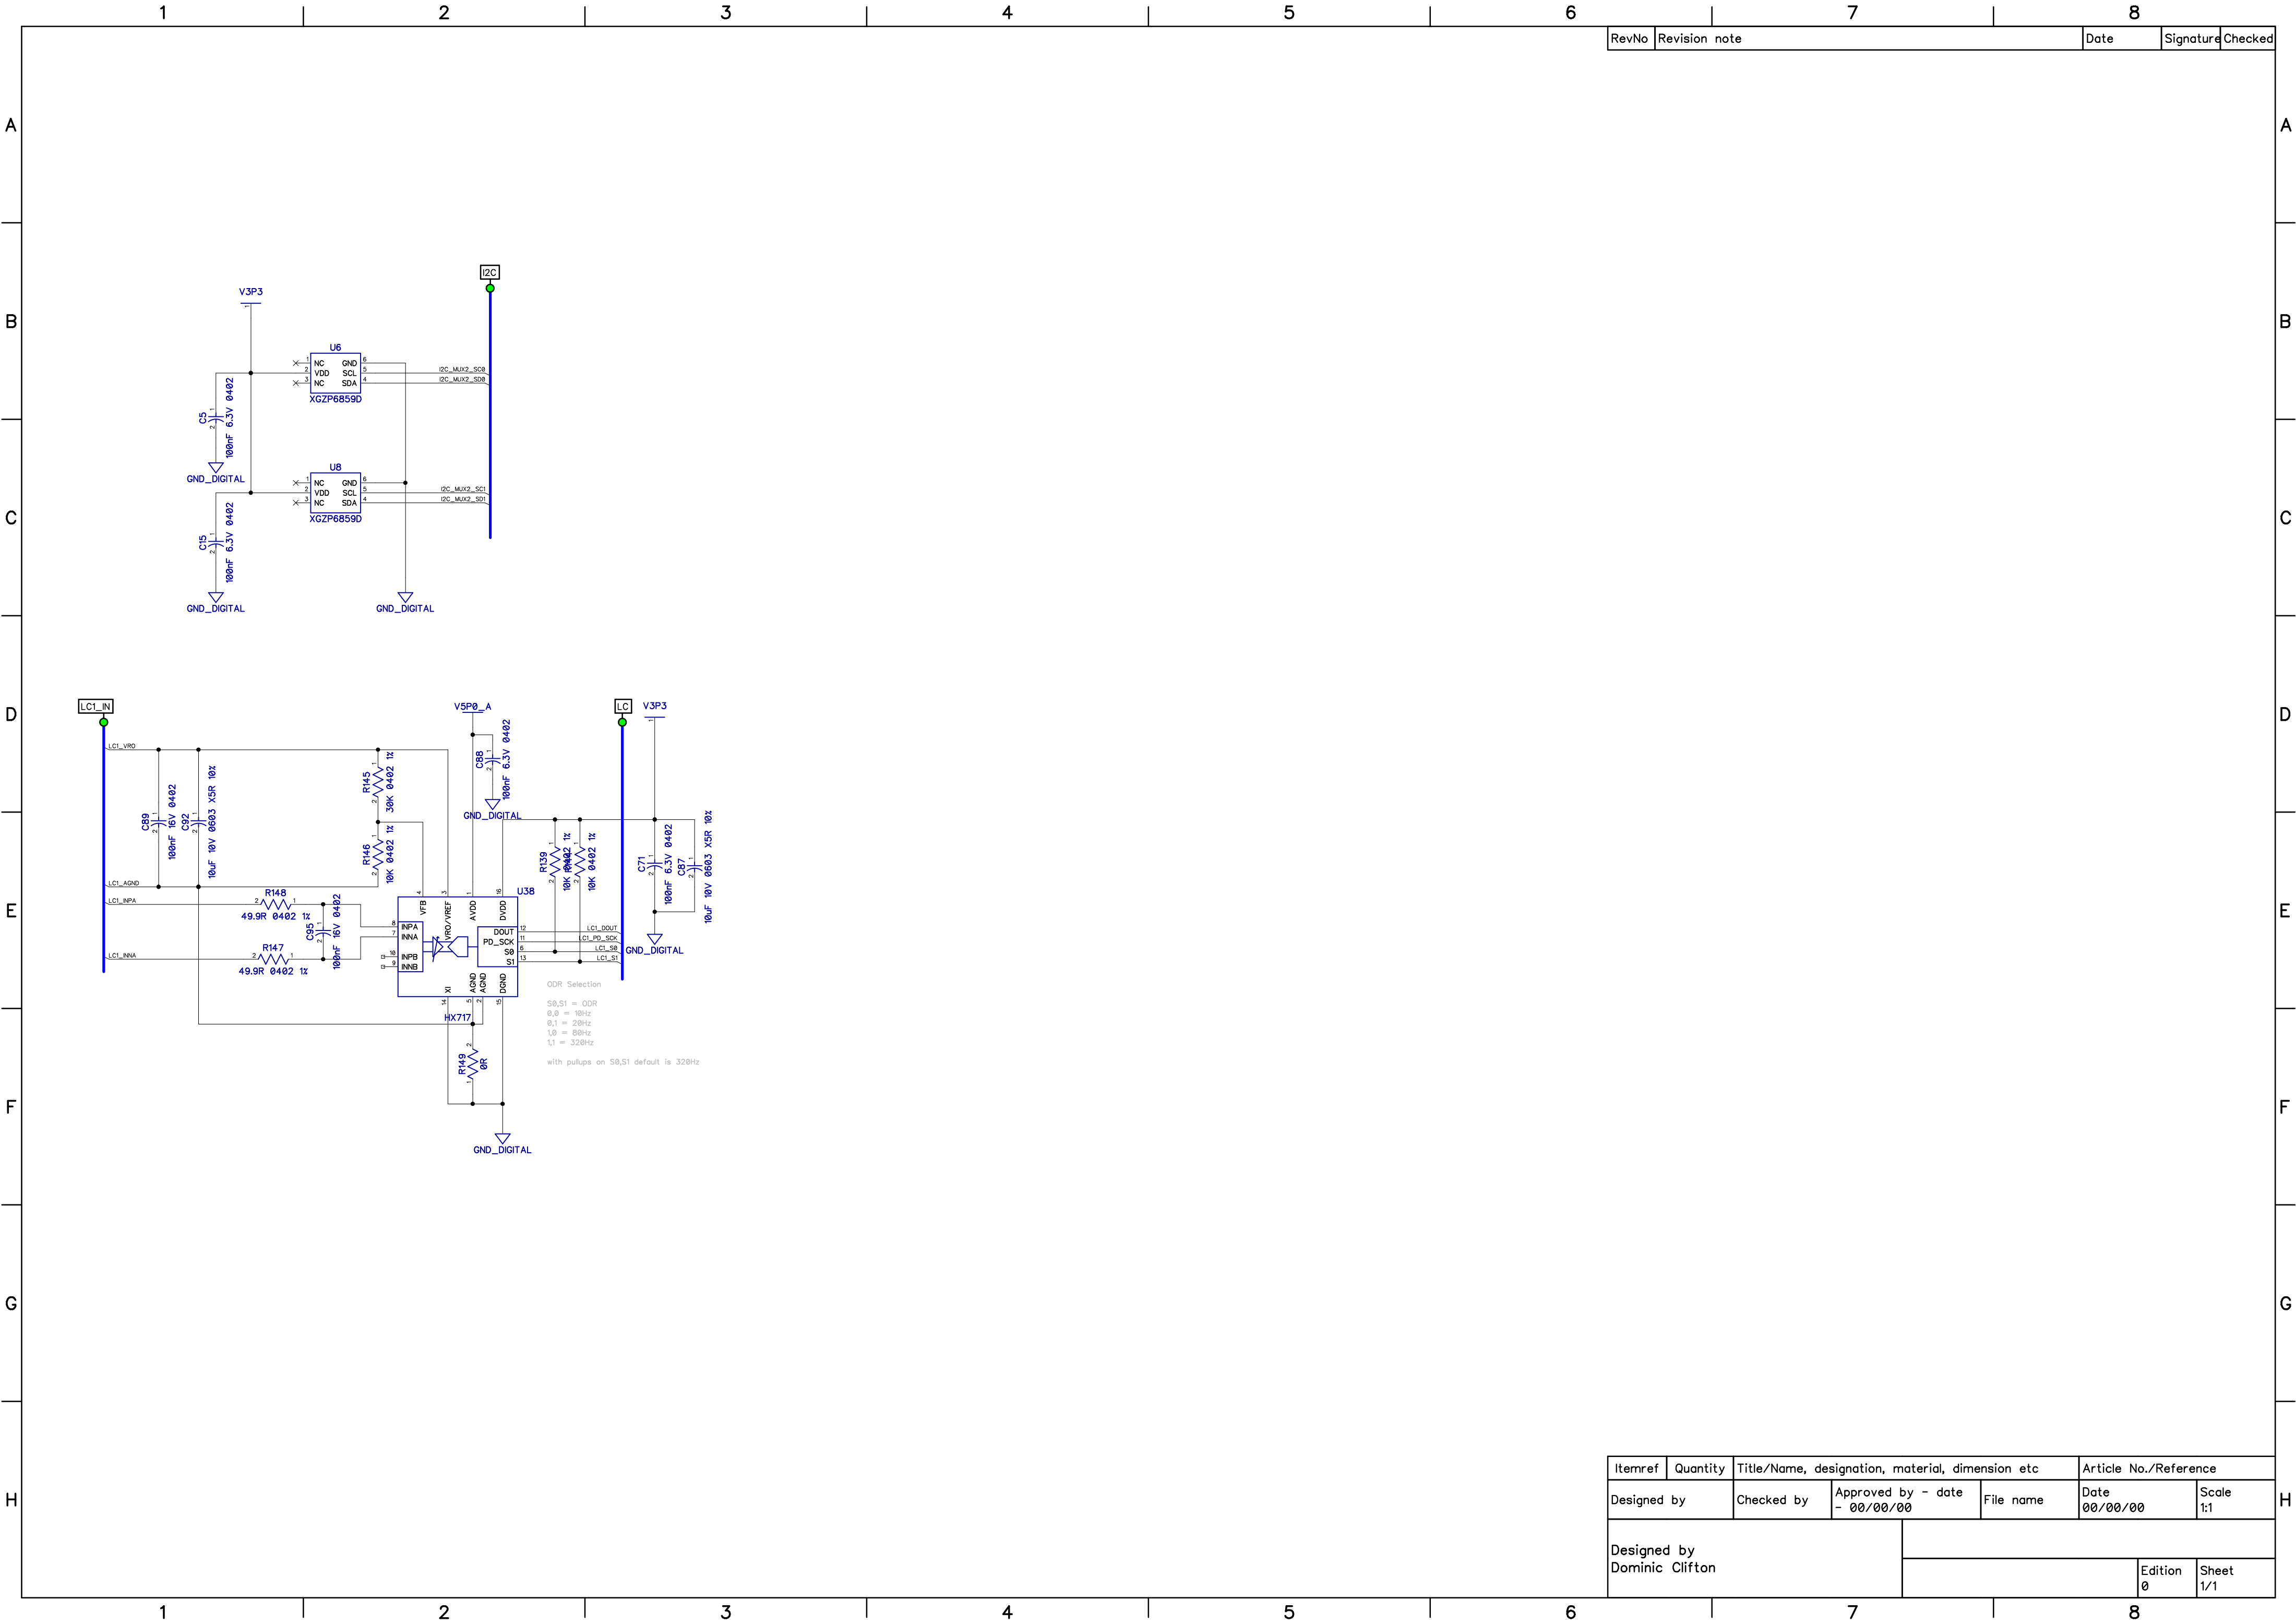

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1	
Designed by Dominic Clifton						
					Edition 0	Sheet 1/1