


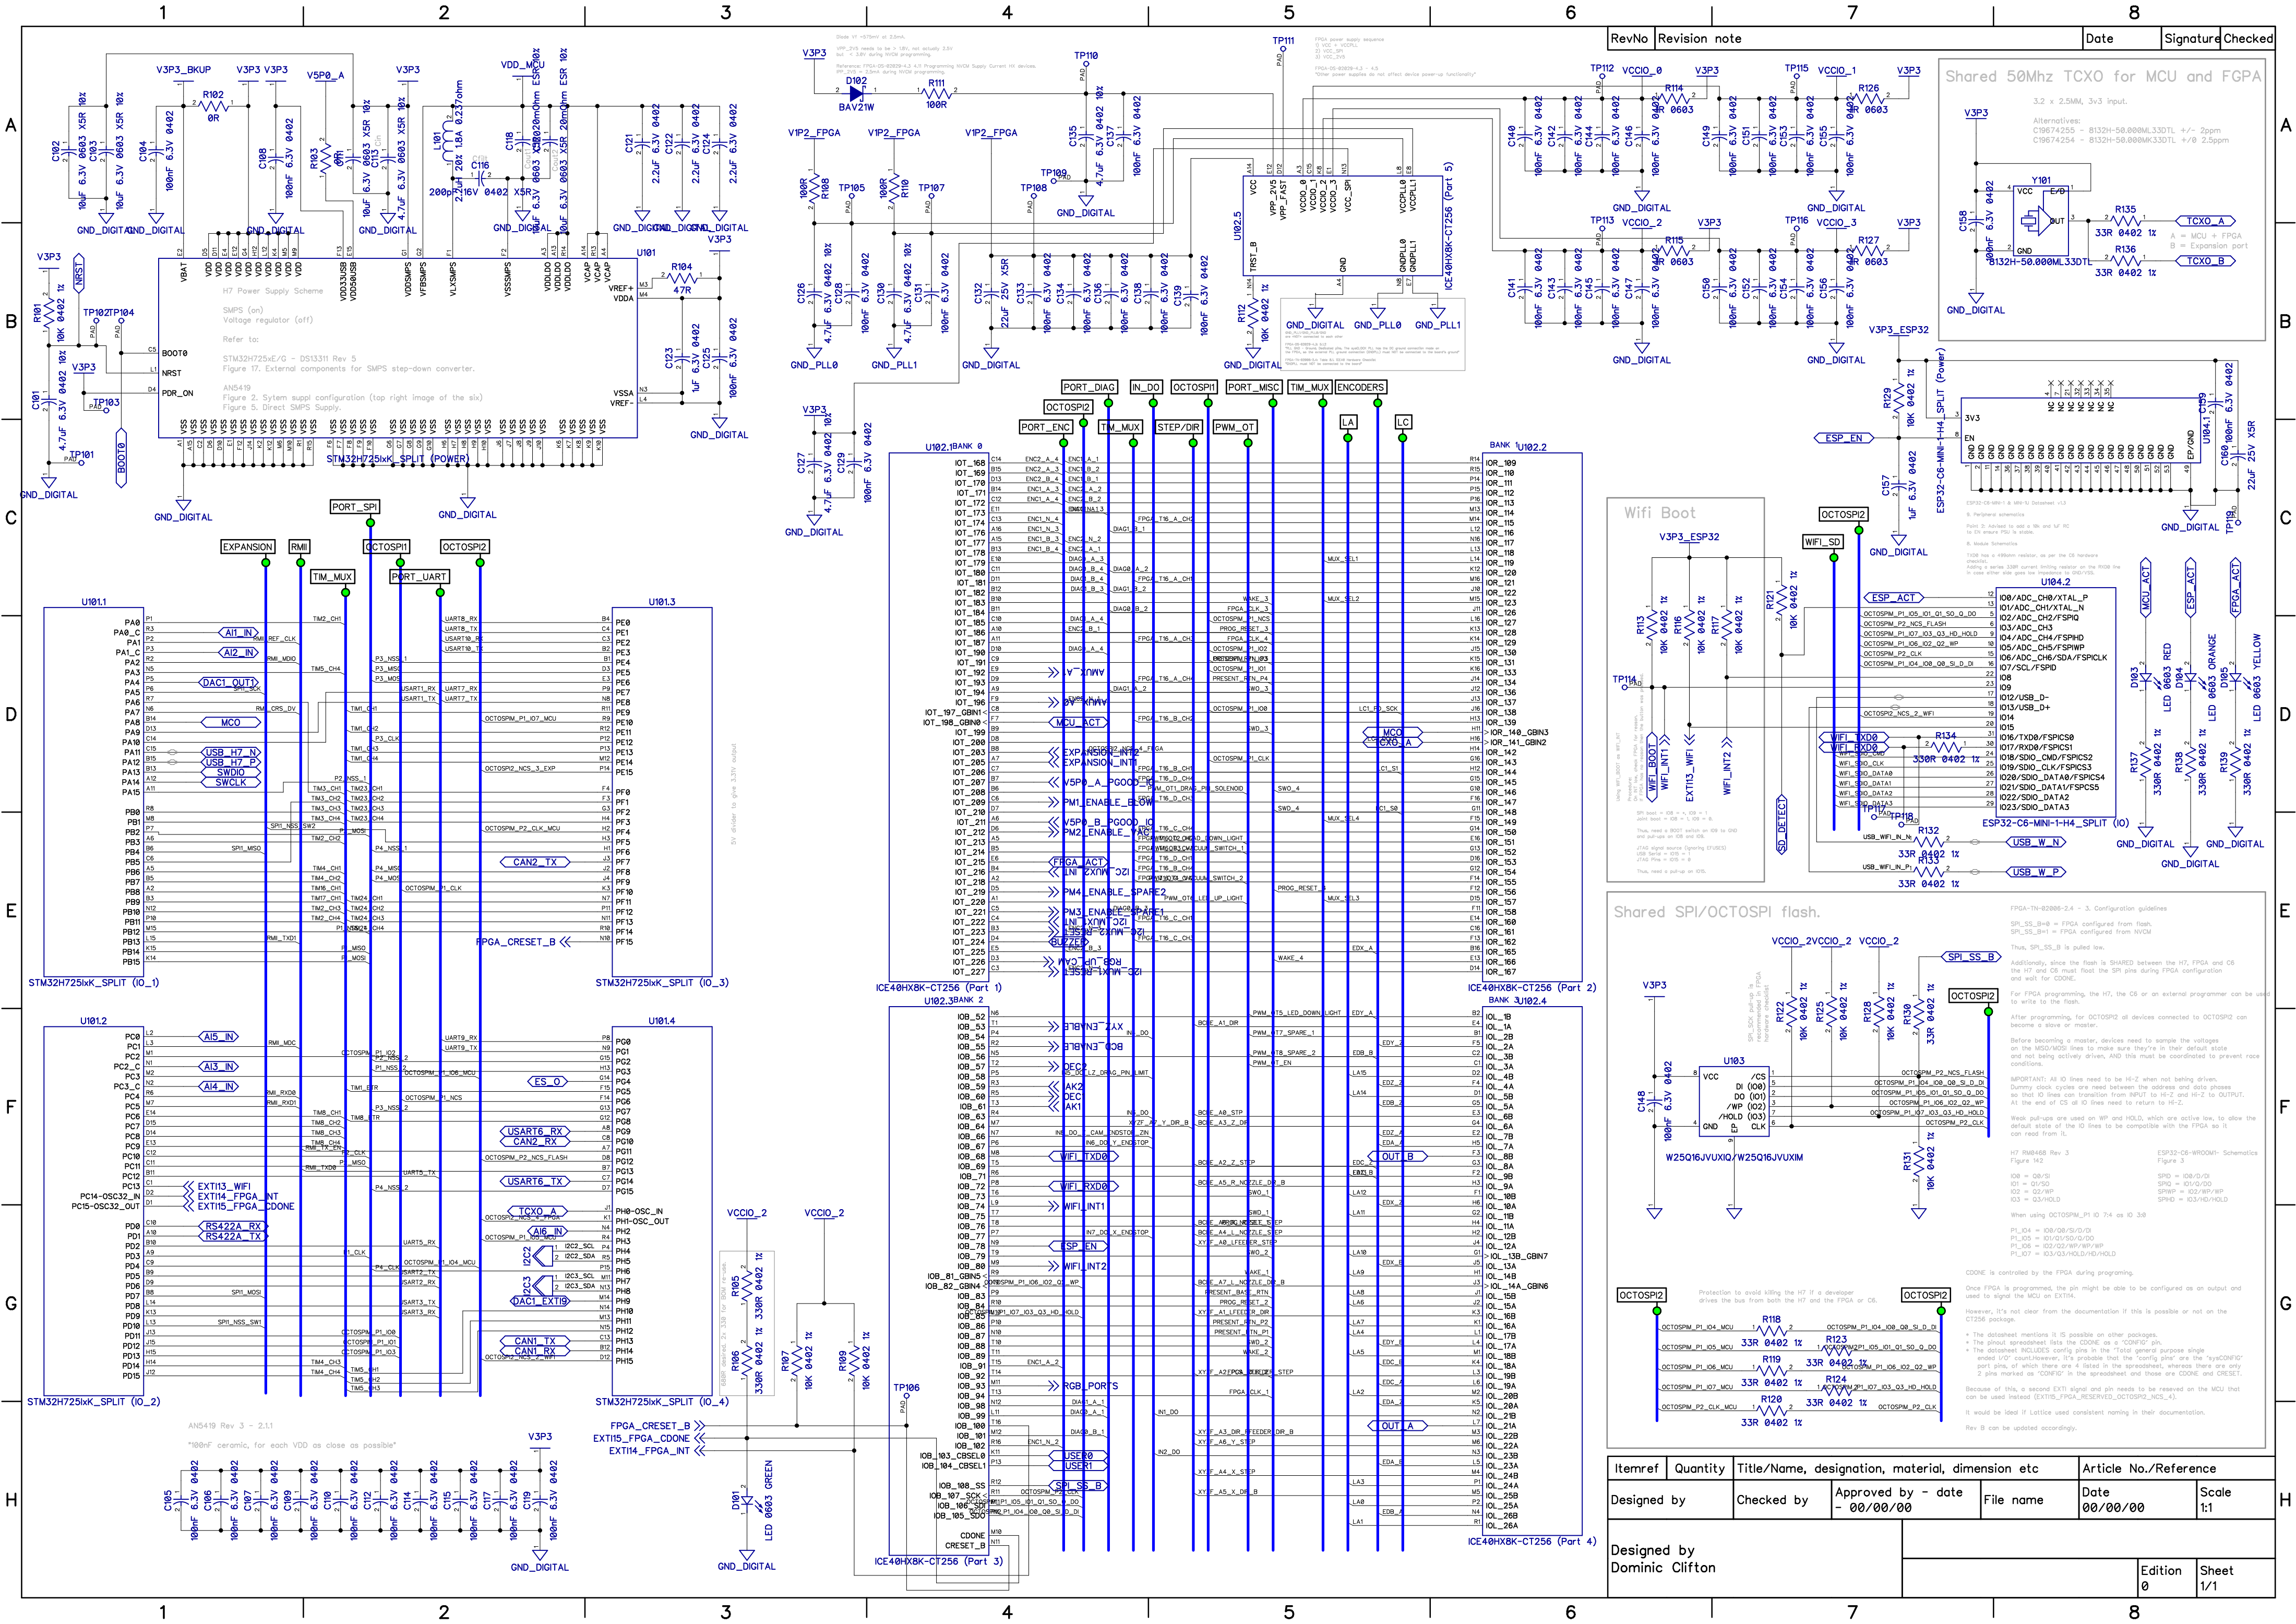
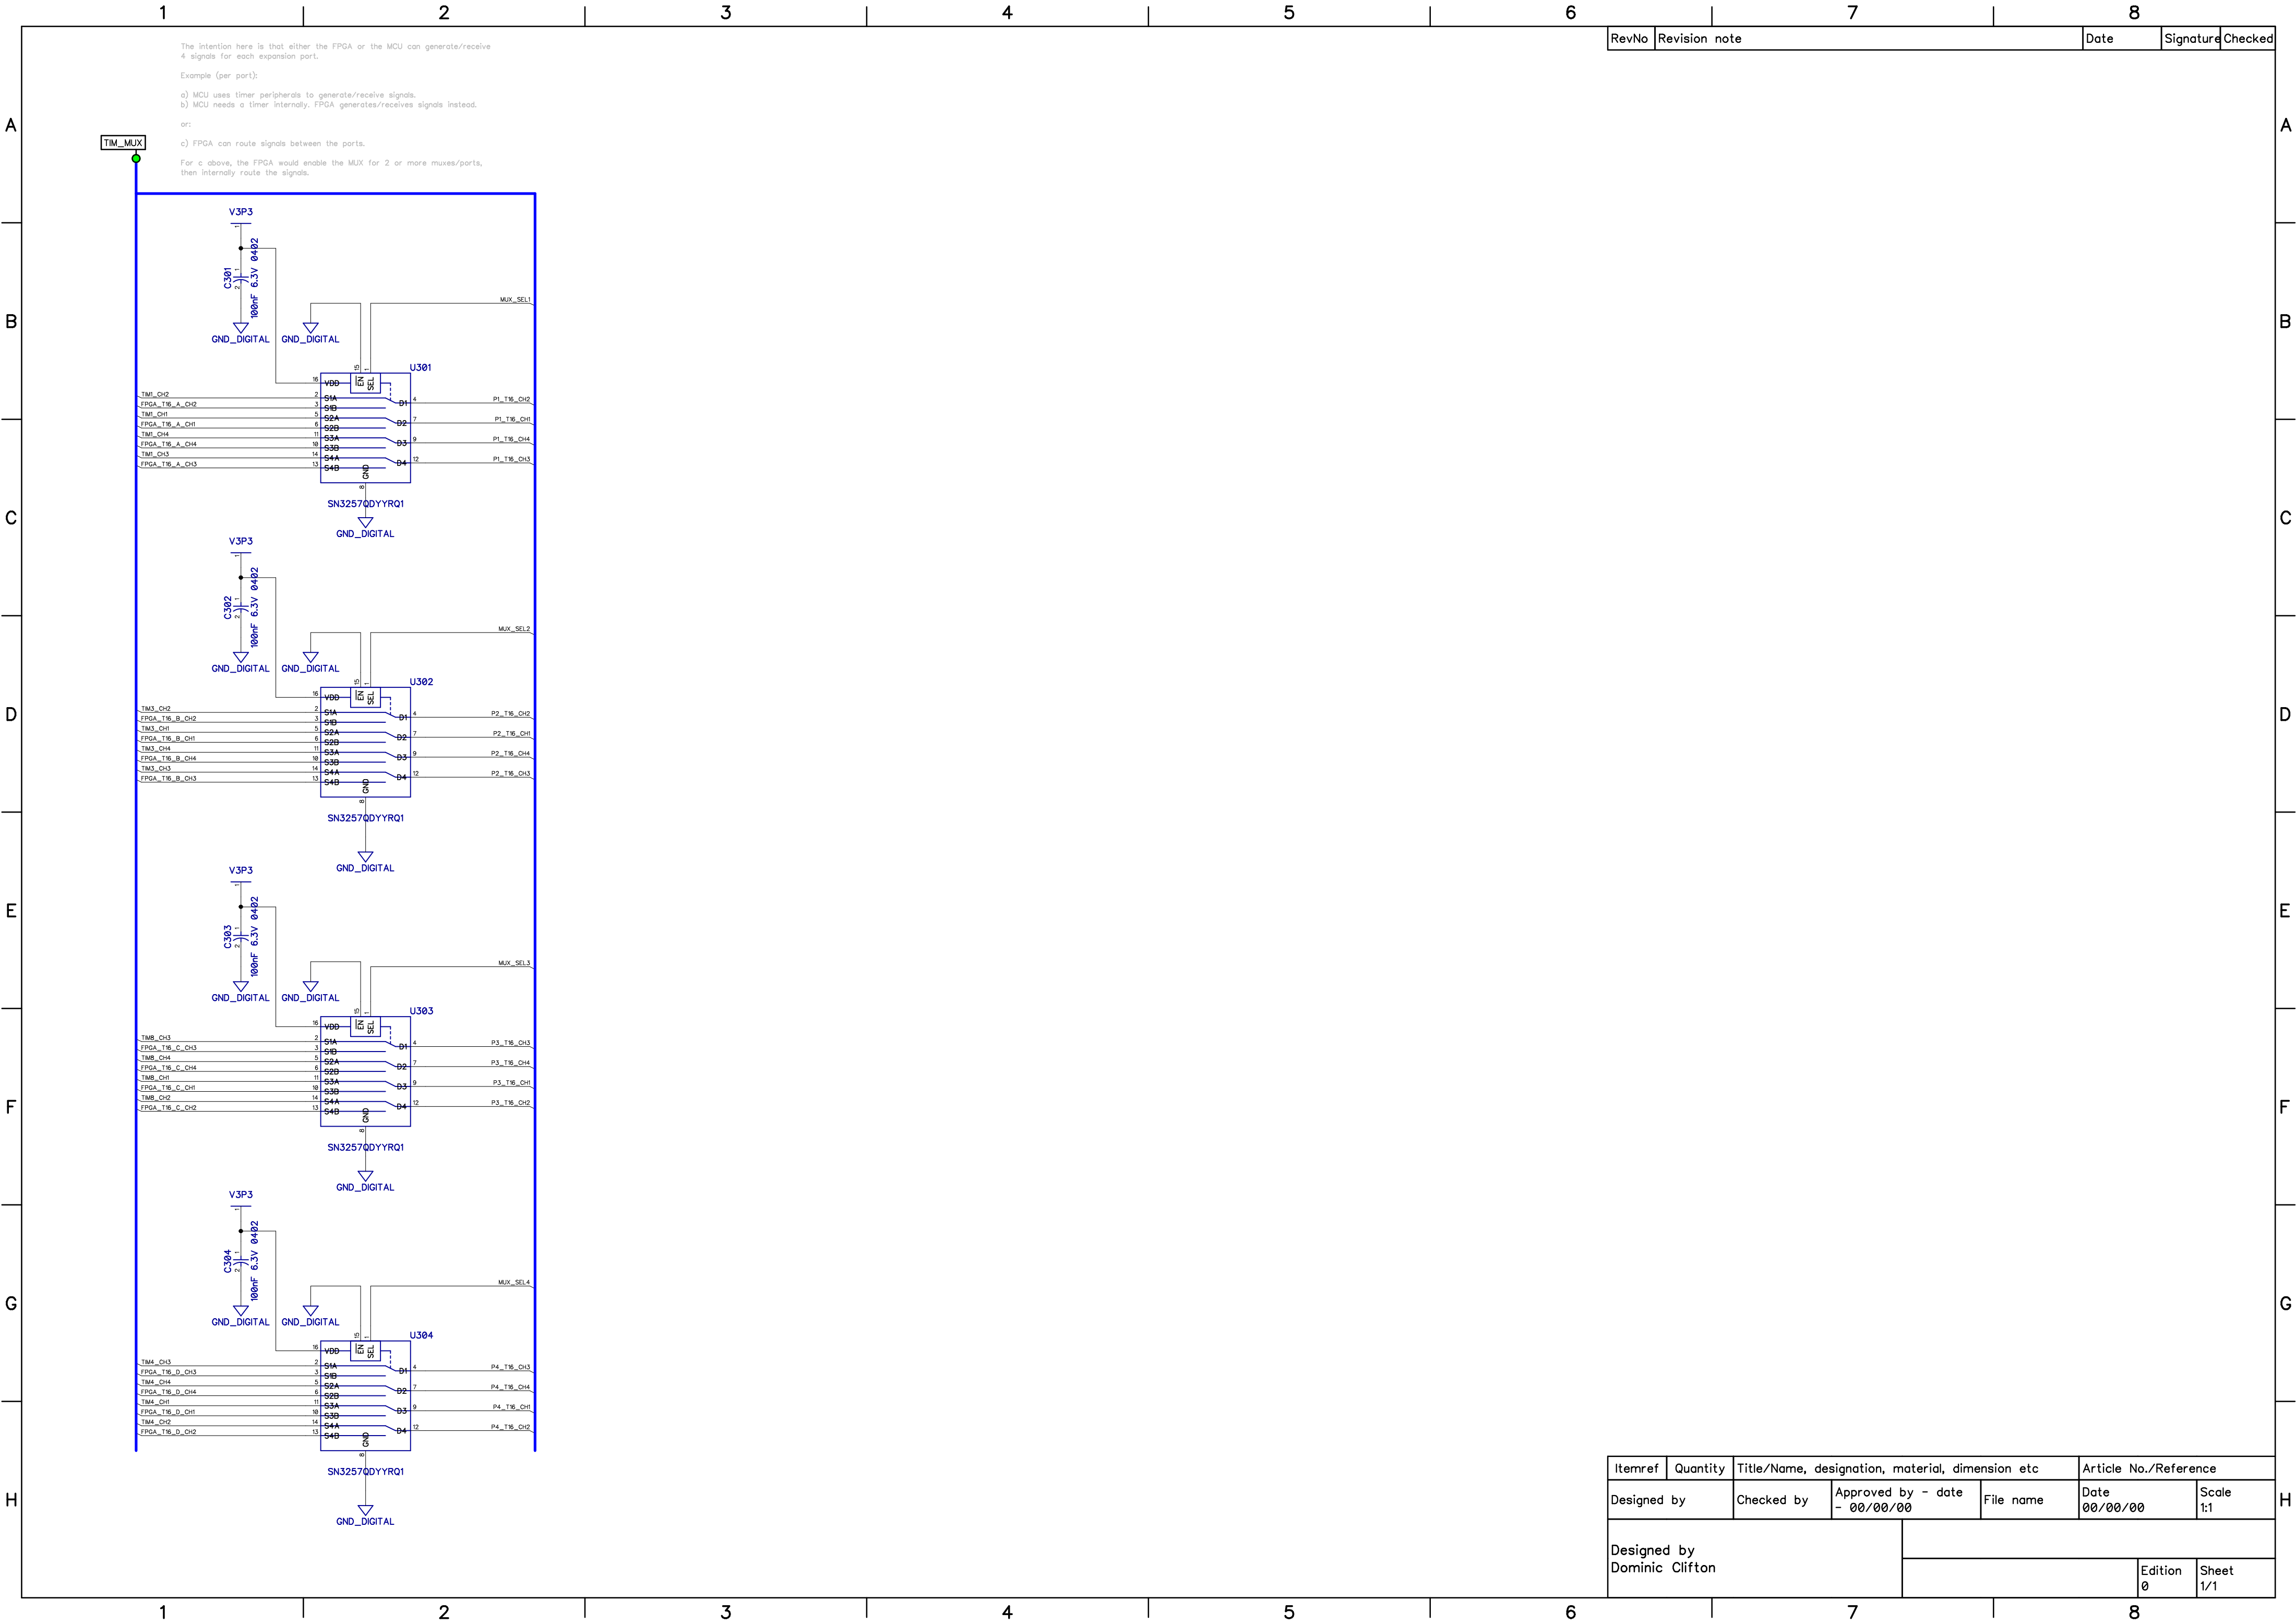


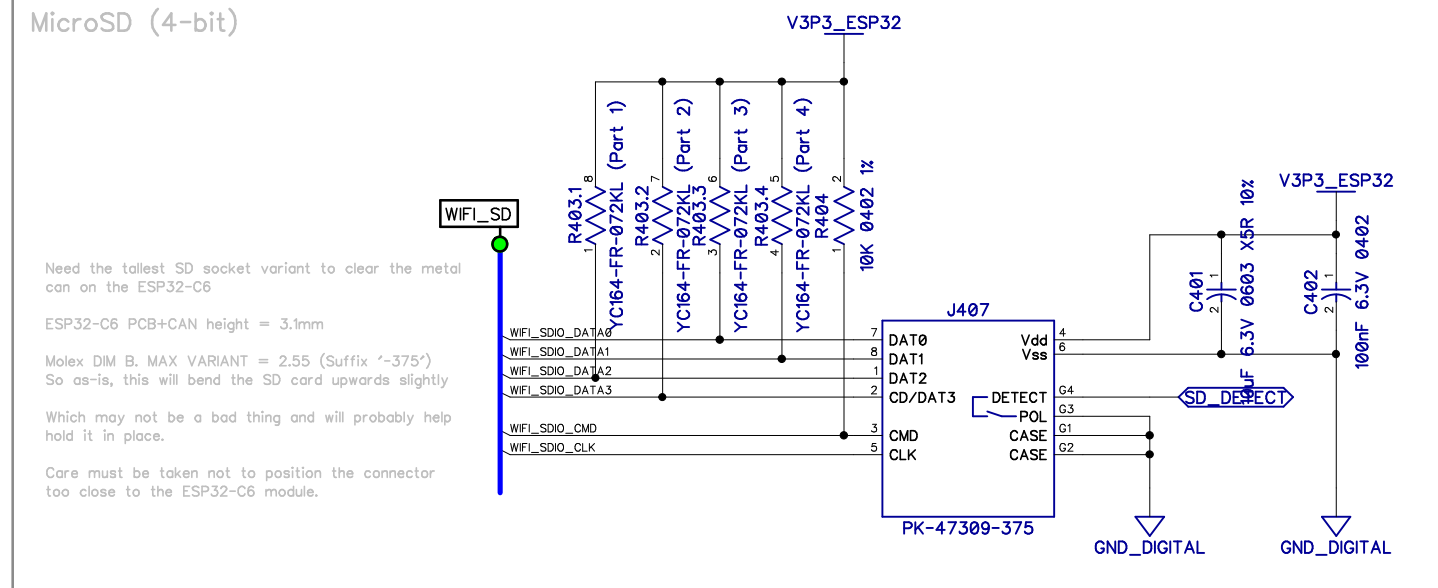

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Designed by	Checked by	Approved by - date	File name
Designed by Dominic Clifton		- 00/00/00	
			Date 00/00/00
			Scale 1:1
			Edition 0
			Sheet 1/1

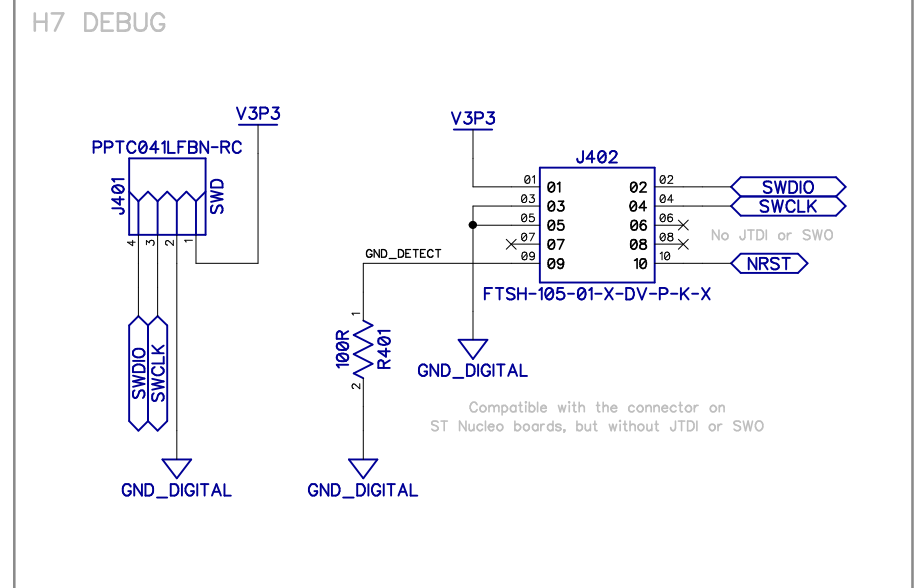

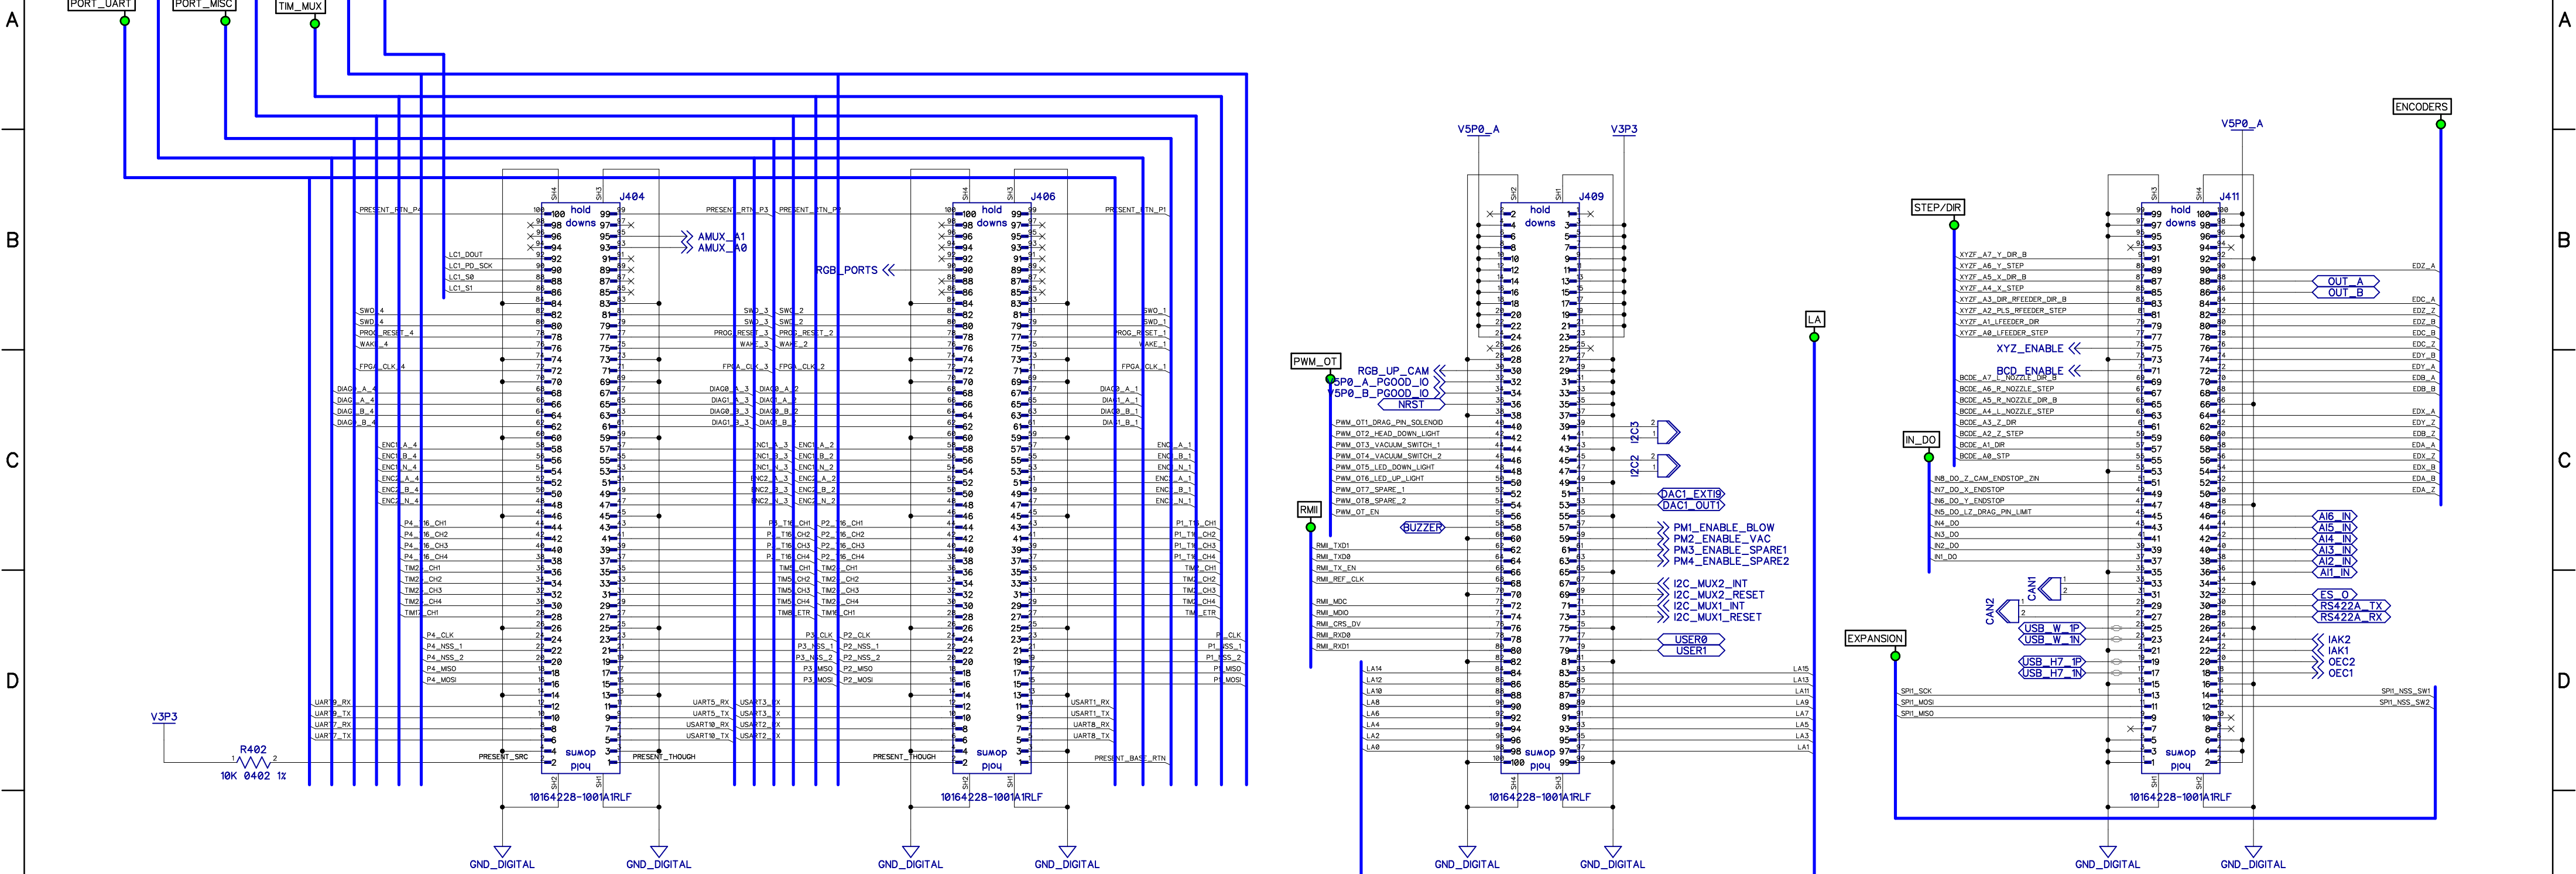

H7 to C6/FPGA UART jumpers.

The intention here is that:

- * the FPGA should communicate with the WIFI chip via UART.
- * the H7 should communicate with the WIFI via OctoSPI.

However, if complications arise this allows the H7 to communicate with the C6 and the FPGA via a UART.

The 0 ohm resistors are fitted, as it is easier to remove them than to fit them for the first run of boards and cheaper than fitting the 127mm pitch headers.

Later assembly runs can be configured as required.

J410

1 2 3 4

USART6_RX
WIFI_TXD0
USART6_TX
WIFI_RXD0

FITS-102-01-L-DV




NO PLACE

USART6_RX 2 R405 1 WIFI_TXD0


OR

USART6_TX 2 R406 1 WIFI_RXD0

0R

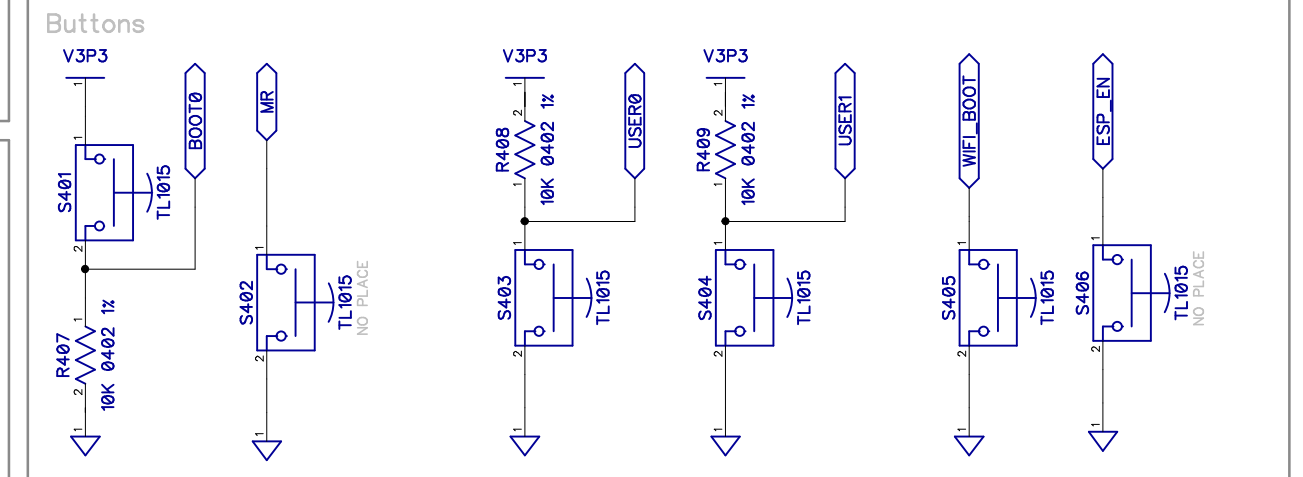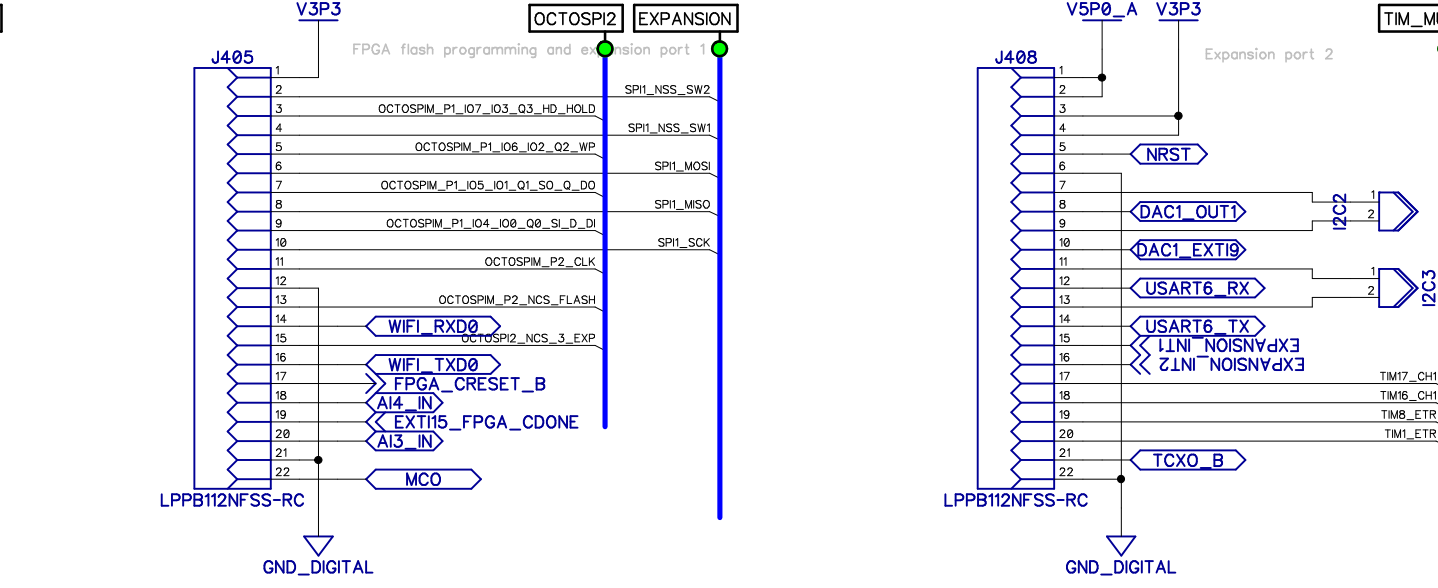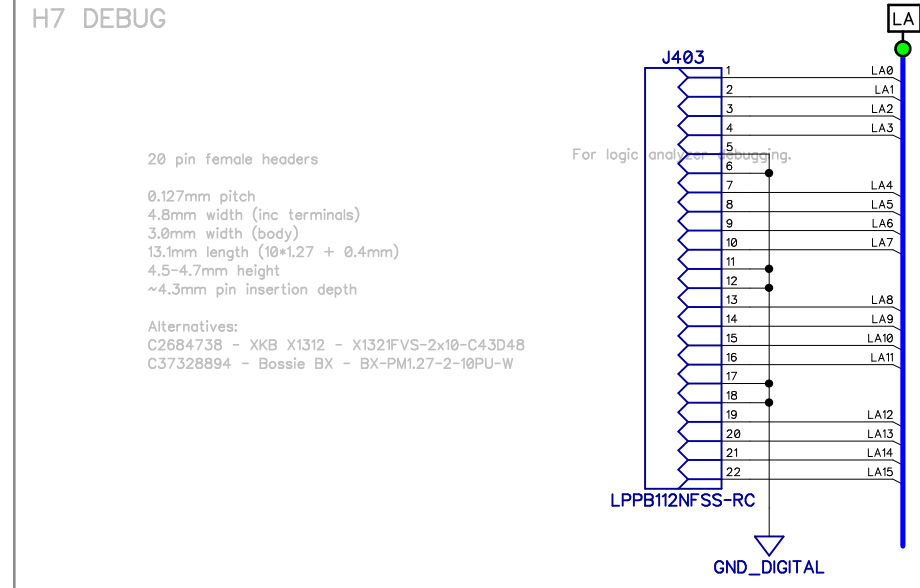

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date - 00/00/00	File name	Date 00/00/00	Scale 1:1	
Designed by Dominic Clifton						
					Edition 0	Sheet 1/1

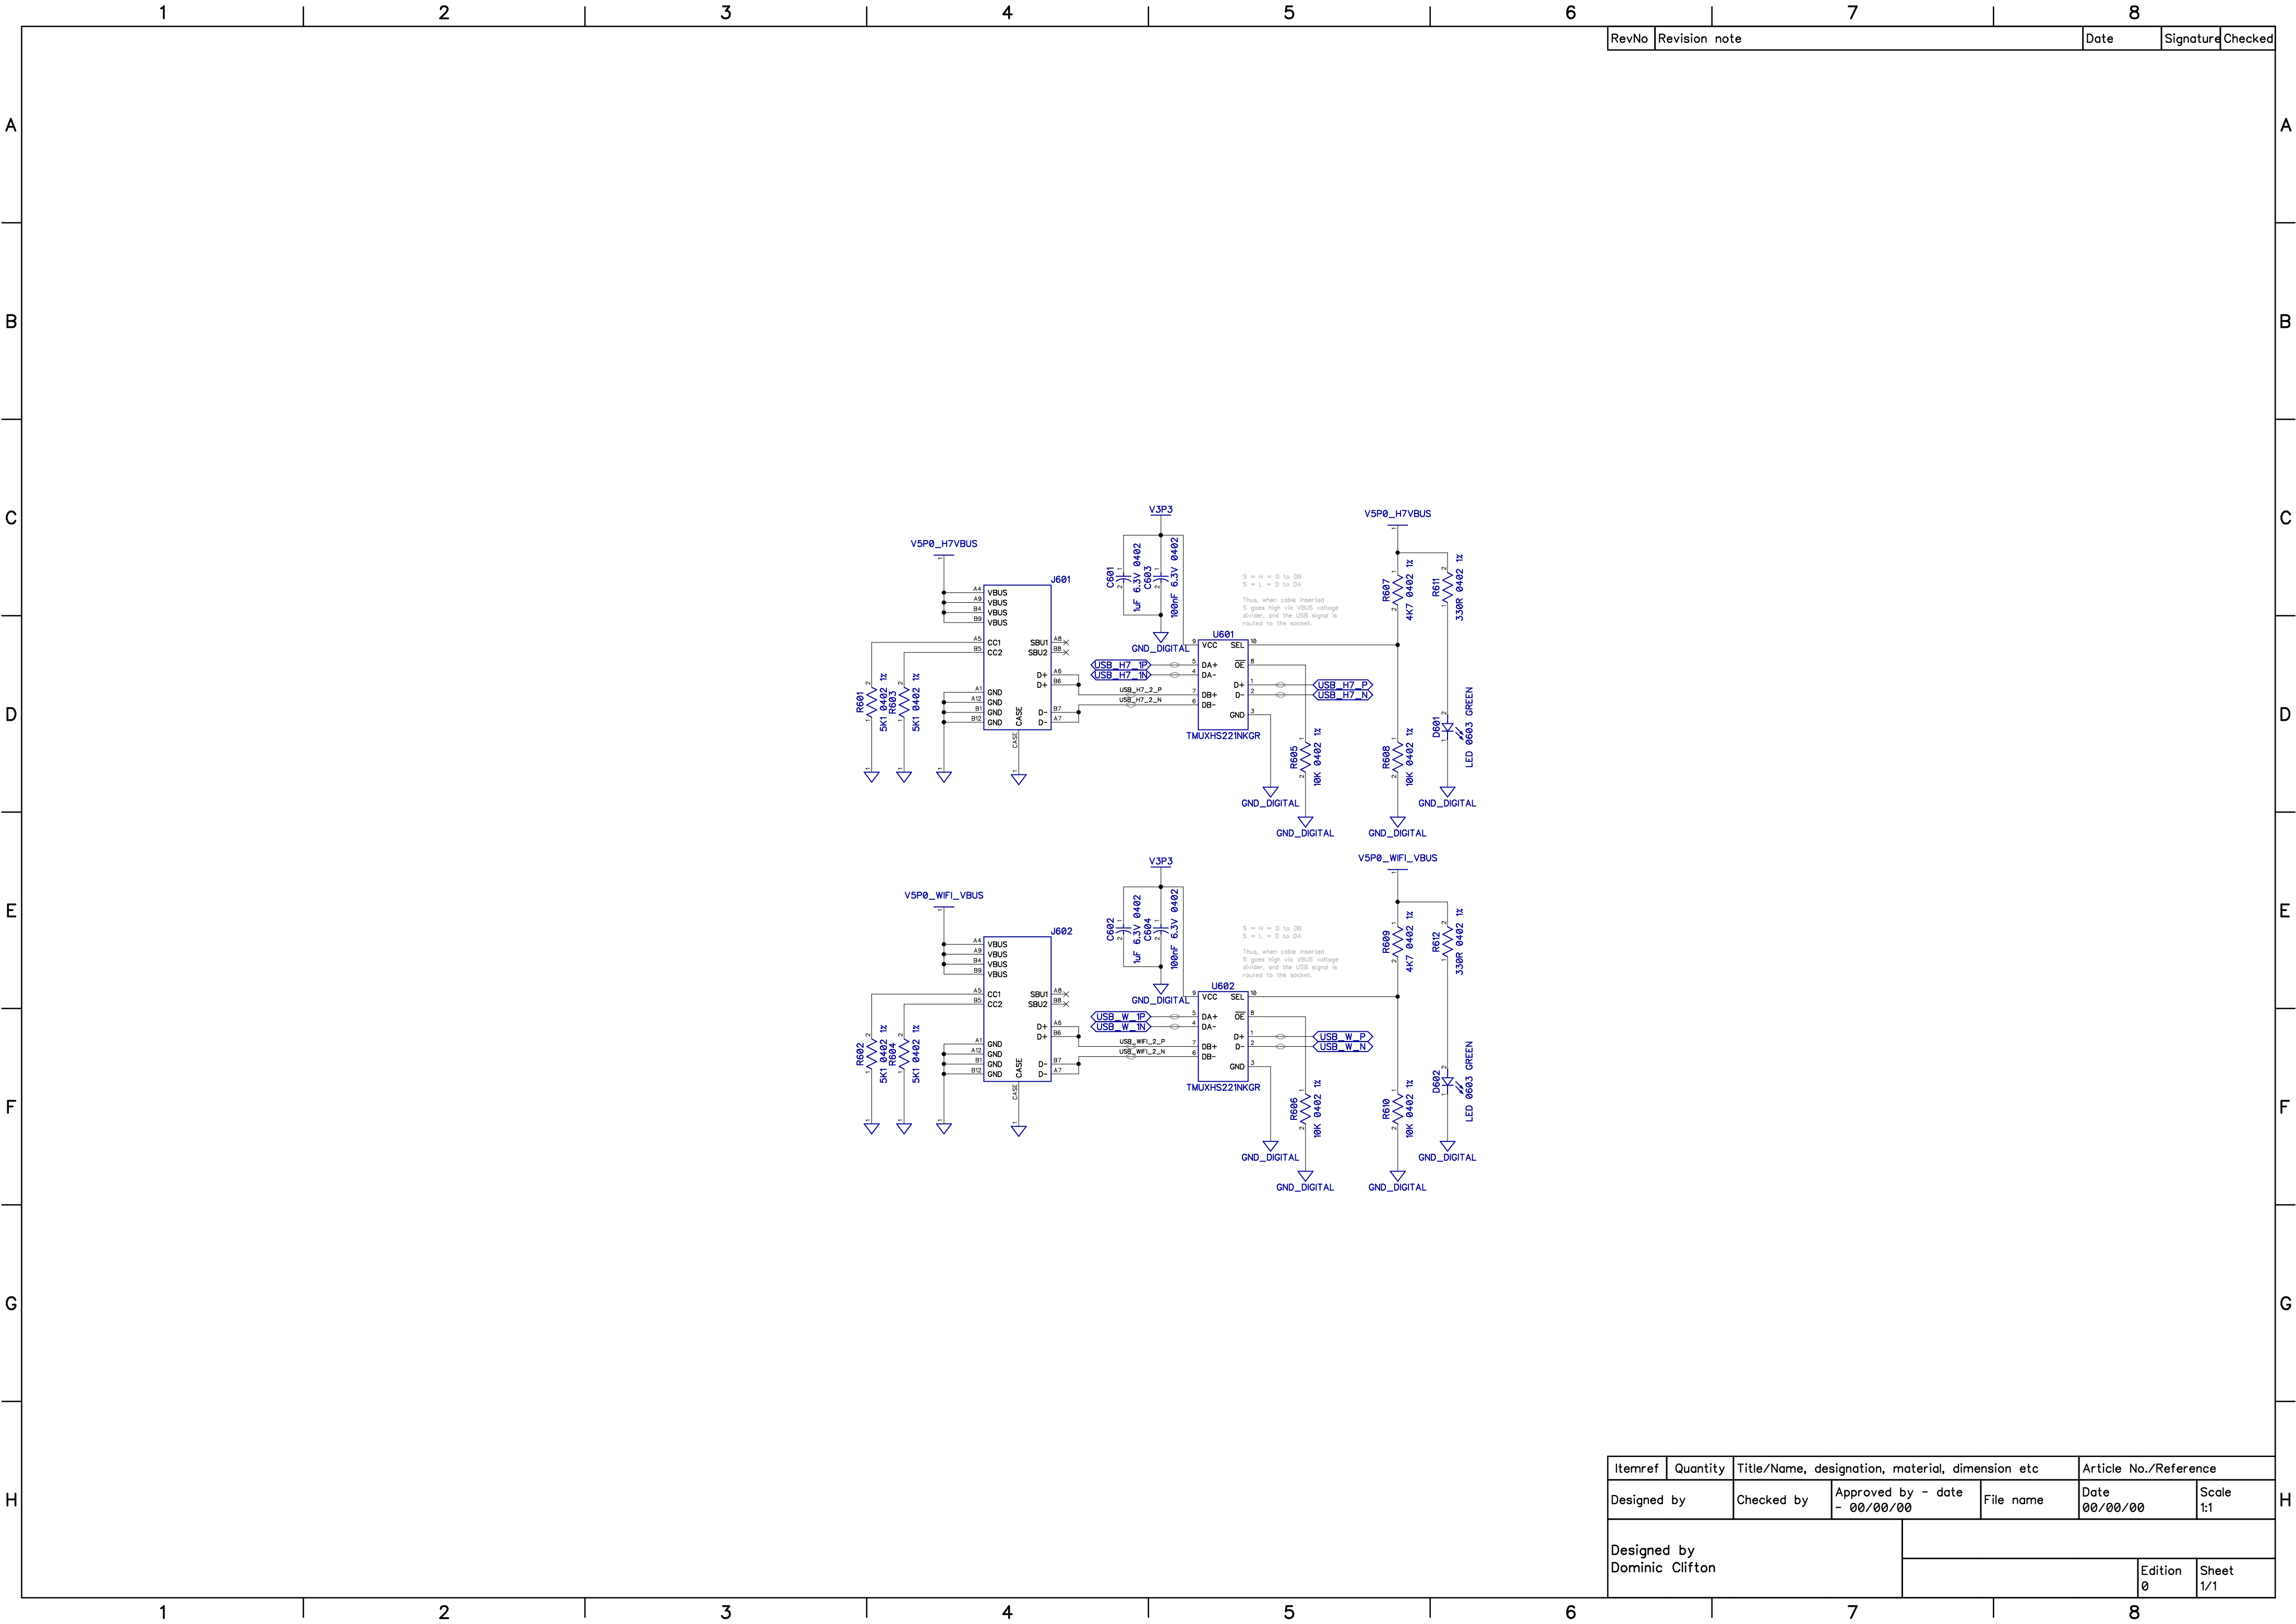

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
Designed by Dominic Clifton				00/00/00	1:1	
				0	1/1	