Time Delay Relays
Solid State Output
Encapsulated

Dayton SKU	Function	Input Voltage	Time Delay	Wiring Diagram
2A559	On Delay (Delay on Make)	24-120VAC & 12-24VDC	0.05-1 Sec.	
2A560			0.25-5 Sec.	
2A561			0.5-10 Sec.	
2A562			3-60 Sec.	
6A857	Off Delay (Delay on Break)	120VAC	0.5-10 Sec.	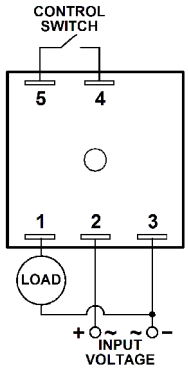
6A858			3-60 Sec.	
6A859			15-300 Sec.	
5WML4		24VAC	0.05-1 Sec.	
5WML5			0.5-10 Sec.	
5WML6			3-60 Sec.	
5WML7		24VDC	0.05-1 Sec.	
5WML8			0.5-10 Sec.	
5WML9			3-60 Sec.	

Application Data

Repeat Accuracy (constant voltage and temperature)**:**
±0.1%

Reset/Recycle Time:
100ms (On Delay)
150ms (Off Delay)

Initiate Time (Off Delay only):
16ms

Temperature:
-25° to 65°C (-13° to 149°F)

Solid State Output:
1A Continuous; 10A single-cycle surge

Life:
No predictable failure if used within operating parameters

Mounting:
Surface with one #8 or #10 screw

Termination:
0.25" male quick-connect terminals

Approvals: c UL us

Dimensions