Gateway Reduces traffic and quickly configures

1. log in platform

SenseCraft Data Platform | IoT Device & Data Platform

（ 1 ） to hit Connect log in equipment Administration platform ， Choice international station （ Such as No account registered can then ） ；

（ 2 ） log in after binding Yours network router （ Need Fill in of information in network router back of label on Yes ）

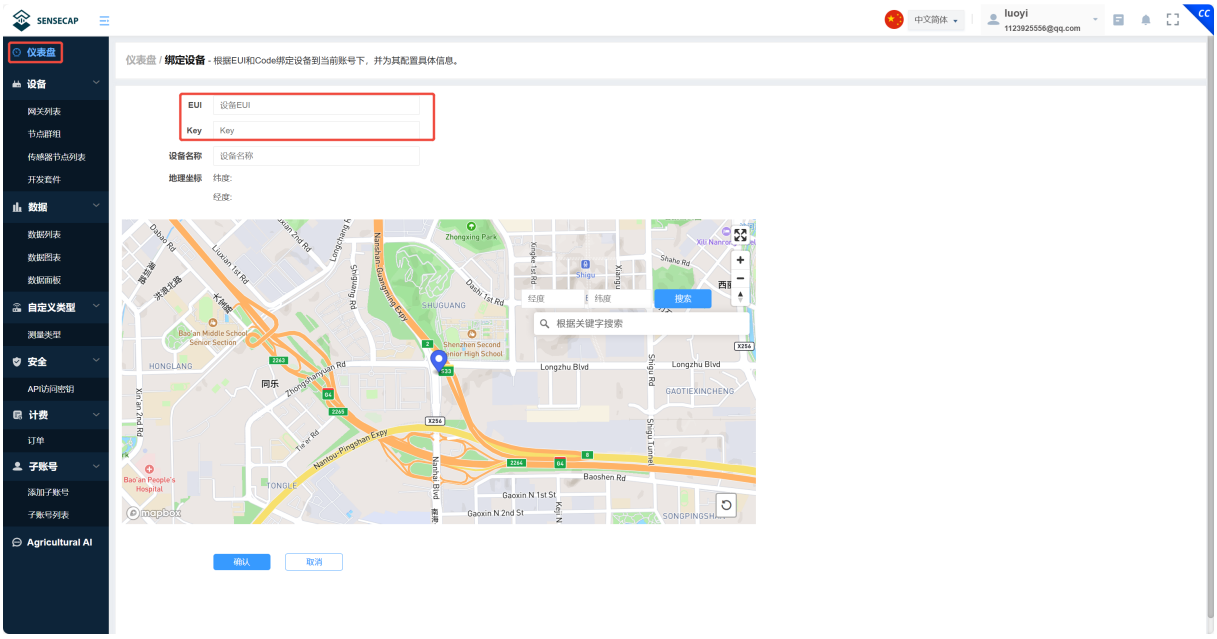

（ 3 ） to hit network router list - > network router EUI ： 2CF7F1124491 xxxx -> Set up - > tunnel Connect

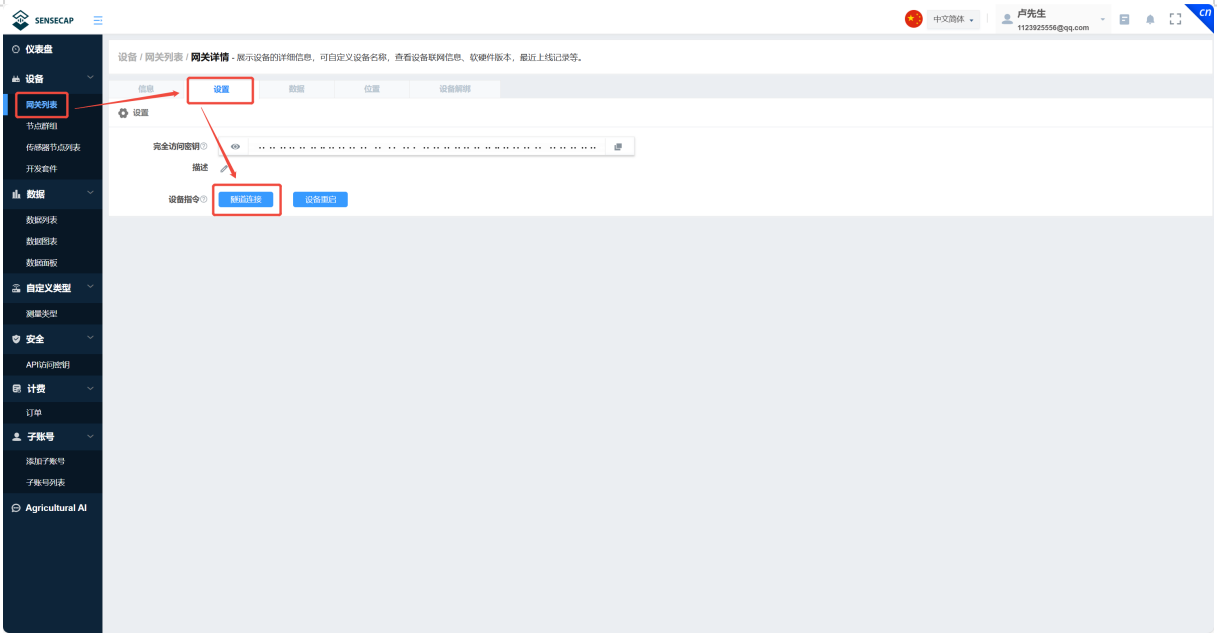

2. network router To configure

（ 1 ）log in network router Backstage ， User name for default of ： admin ， cipher ： **There's a label on the back of the gateway 。**

（ 2 ）network Close will automatically update the release,Update to 1.1.6 ， The os firmware needs to be updated manually on luci.Updated to 0.9.5 and above,You can't lose power during the update 。

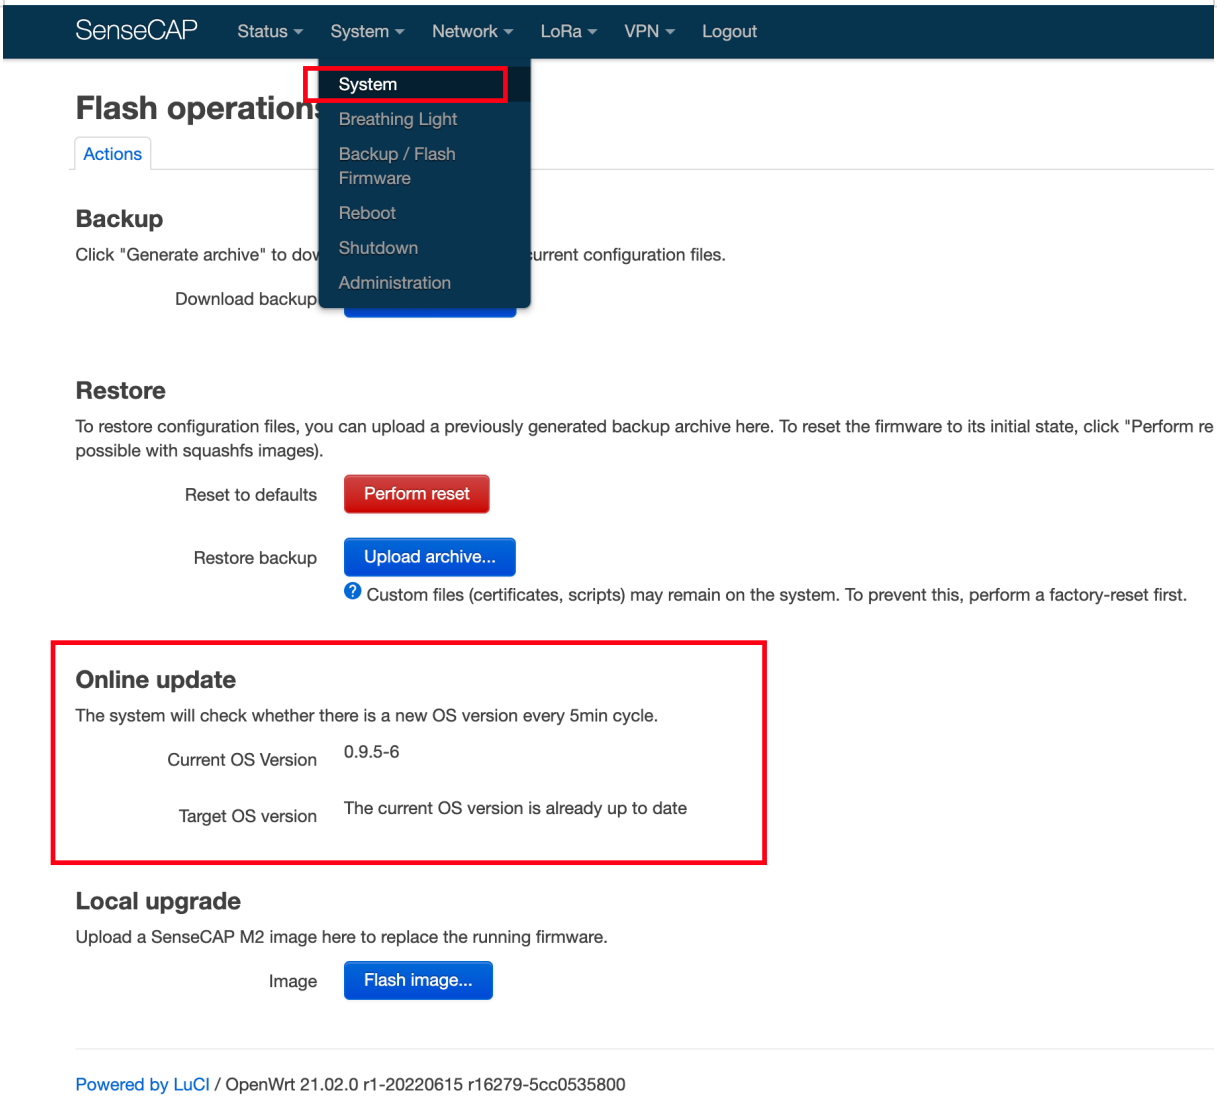

（ 3 ） To configure White List （ **Skip if you don't need to.** ）

① s Ensecap mode: automatically filters sensecap nodes,No additional configuration required ；

② P Acket Fowarder and Basicstation modes,Make it possible to whitelist,Add the list 。

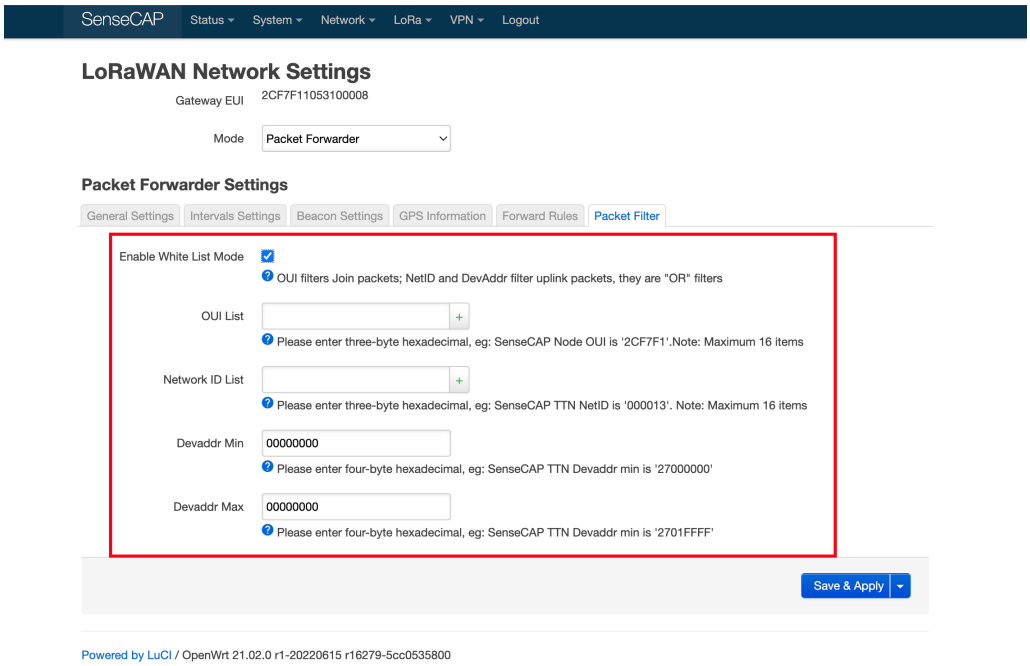

Be careful ： T Whitelist filtering cannot be configured for TN's basicstation mode,So the configuration interface has been added to luci ， But AWS has this feature. There is no need to configure this feature in the gateway's luci ， You just need to create a gateway on AWS.

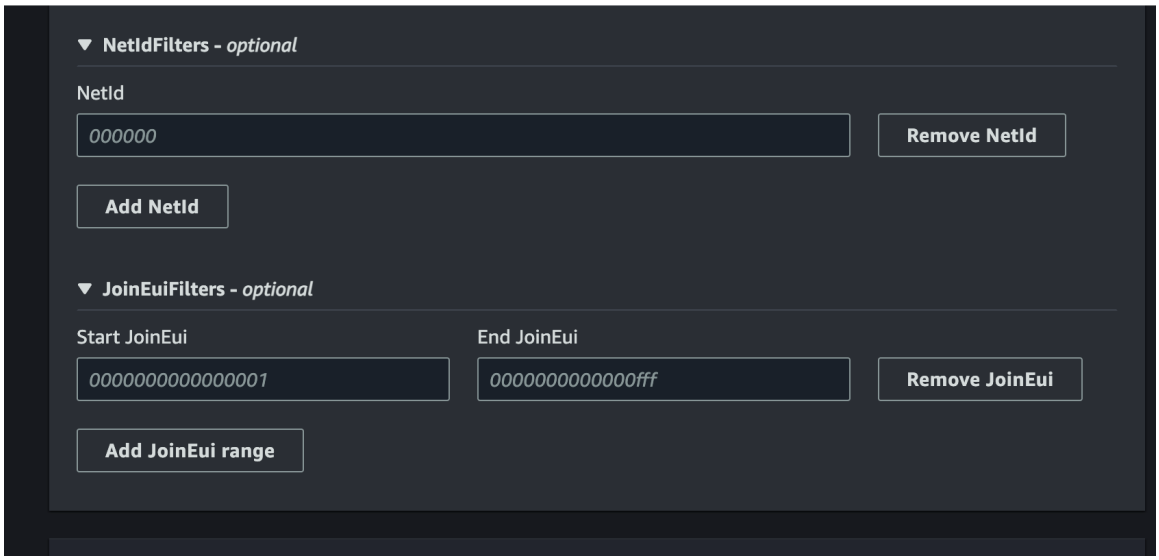

OUI list ： Too much filtering into web packages,For the first three bytes of the EUI

Network ID list & DevAddr: Filter uplink packets,Whenever both are satisfied, they will report them,NetID and DevAddr The relationship is provided in the following document.

NetID and DevAddr Prefix Assignments | The Things Network

（ 4 ） Modify the period and number of bytes of mwan3ping

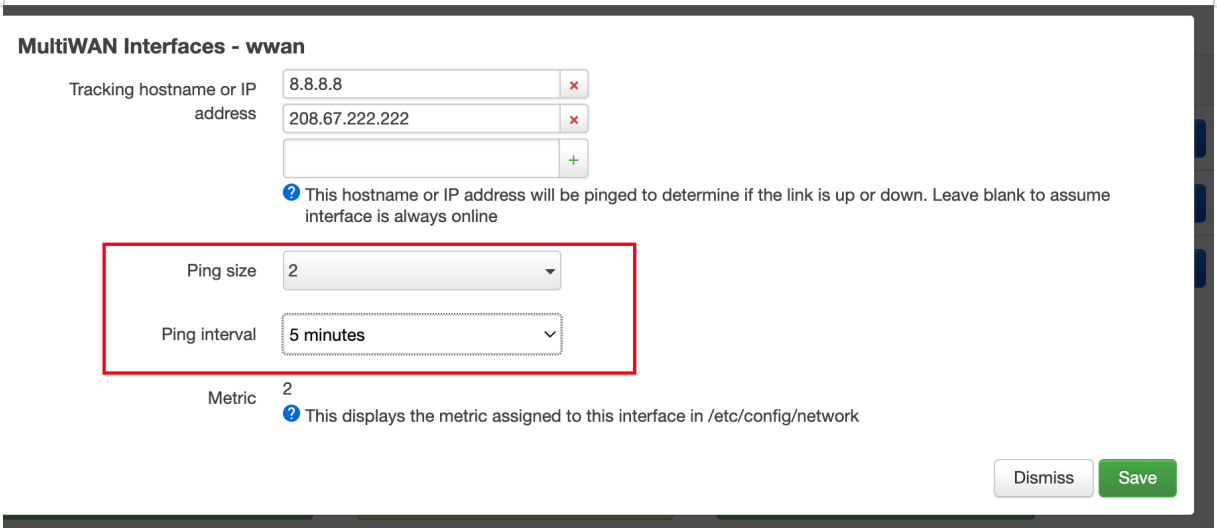
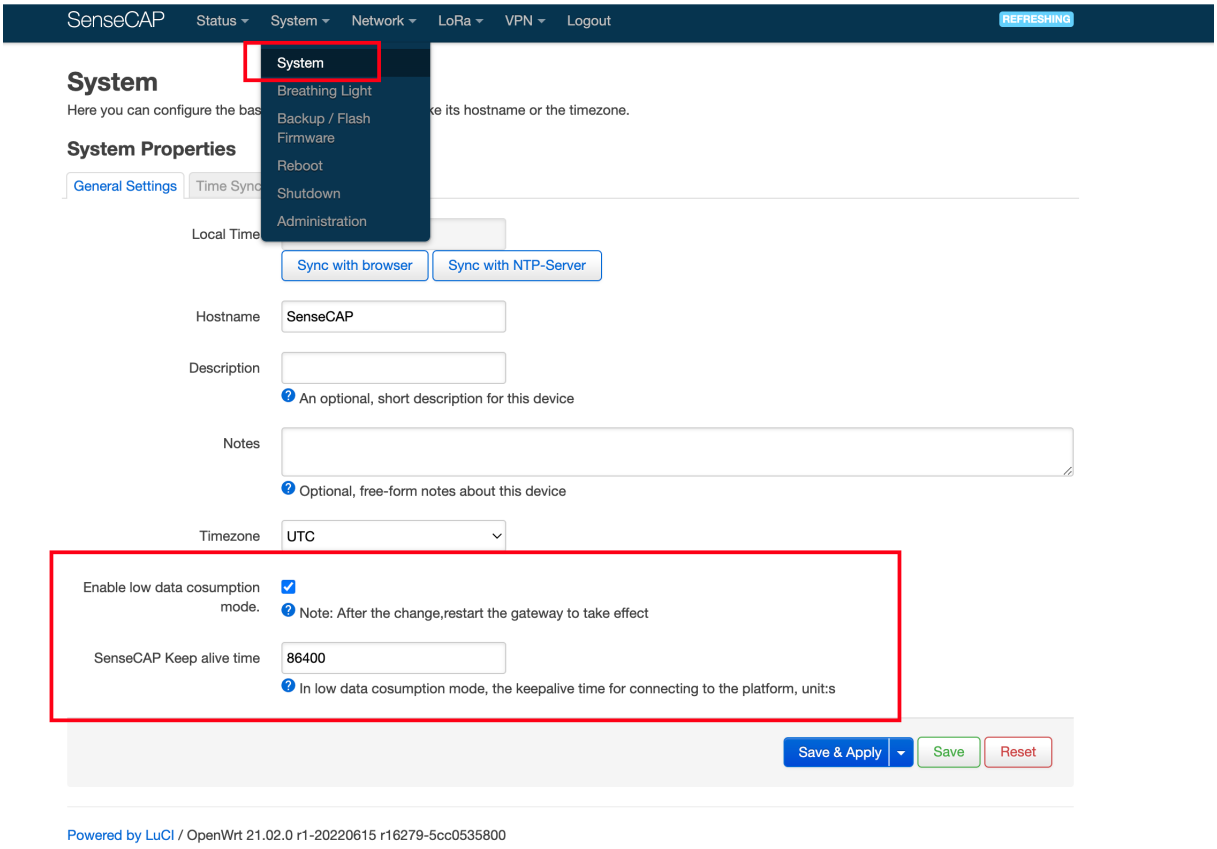
（ 5 ） Enabling low data consumption patterns,The default heartbeat for connecting to the sensecap platform is once every 1 day.The reboot of the gateway takes effect.