


JGB37 Geared DC motor Datasheet

Working Parameters:

- **Output Signal:** Square wave, AB phase
- **Power Supply Voltage Range:** 3.3-5V
- **Operating Temperature Range:** -40°C to 120°C

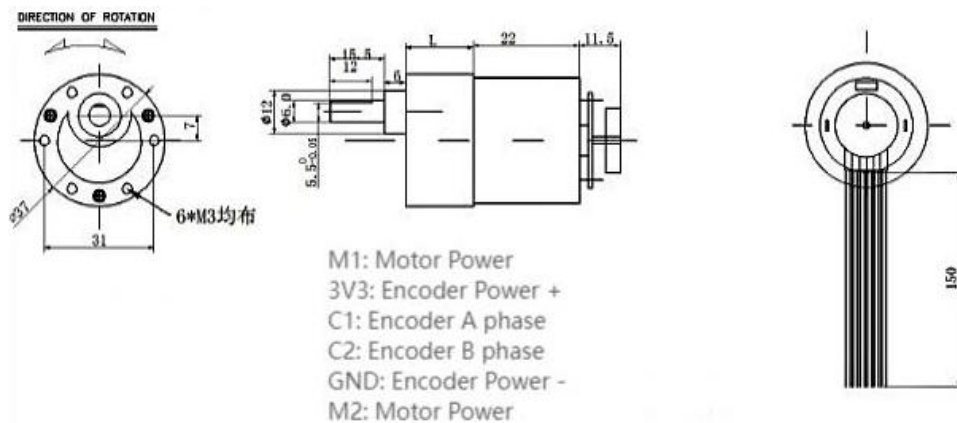

Rated DC 6V testing parameter table

Reduction ratio	6.3	10	19	30	56	90	131	168	270	506	810
No load current mA	≤70	≤70	≤70	≤70	≤70	≤70	≤70	≤70	≤70	≤70	≤70
No load speed rpm	1000	600	300	200	100	70	45	35	20	12	7
Rated torque Kg,cm	0.4	0.5	1.1	1.7	3.2	5.0	7.5	9.5	15.0	28.0	35.0
Rated speed rpm	800	500	265	166	90	55	38	30	18	10	6
Rated current A	≤0.45	≤0.45	≤0.45	≤0.45	≤0.45	≤0.45	≤0.45	≤0.45	≤0.45	≤0.45	≤0.45
Max torque Kg,cm	0.5	0.8	1.6	2.5	4.5	7.5	12.0	15.0	24.0	Max 35kg	
Stop current A	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	Ban stall	
Length mm	19		22		24		26.5			29	

Rated DC 12V testing parameter table

Reduction ratio	6.3	10	19	30	56	90	131	168	270	506	810
No load current mA	≤120	≤120	≤120	≤120	≤120	≤120	≤120	≤120	≤120	≤120	≤120
No load speed rpm	1590	1000	530	333	178	110	76	60	37	20	12
Rated torque Kg,cm	0.7	1	2.2	3.5	6.5	10.0	15.0	19.0	30.0	35.0	35.0
Rated speed rpm	1200	770	407	250	140	85	58	46	28	15	9
Rated current A	≤1	≤1	≤1	≤1	≤1	≤1	≤1	≤1	≤1	≤1	≤1
Max torque Kg,cm	1.0	1.6	3.1	5.0	9.0	15.0	24.0	31.0	Max 35kg		
Stop current A	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	Ban stall		
Length mm	19		22		24		26.5			29	