


Battery Holder
2x2032 or 2x2016
with switch

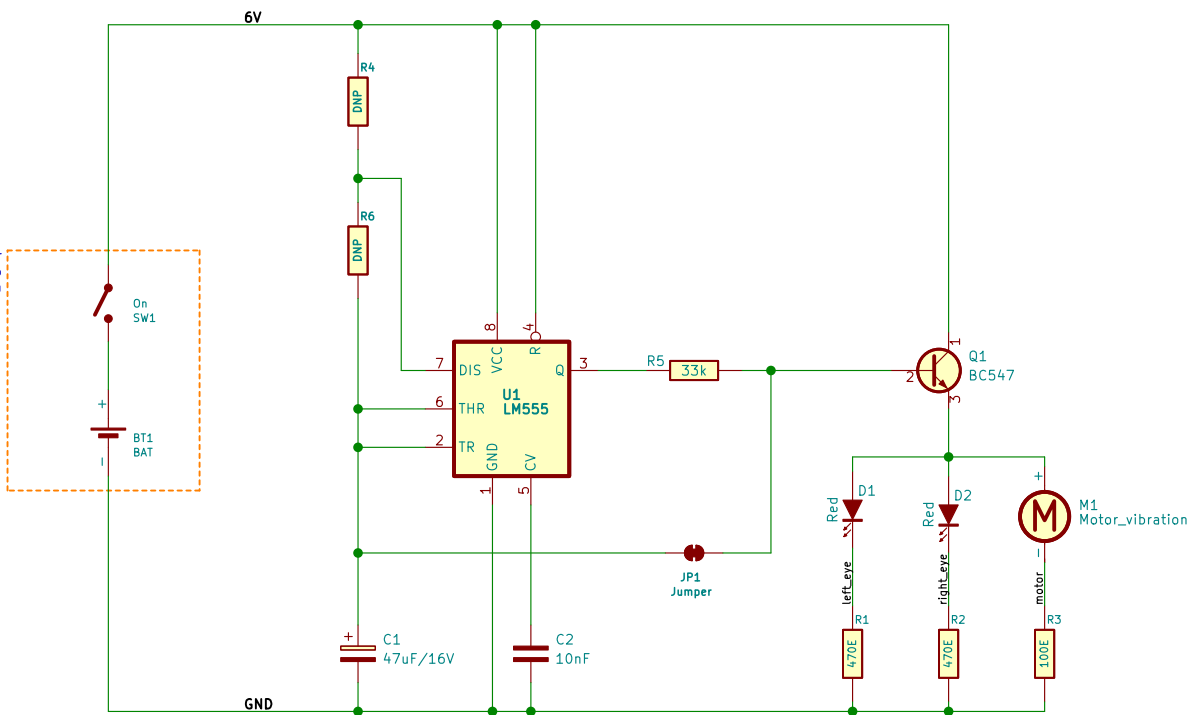

NOTE
With JUMPER JP1 bridged, output current is variable causing "breathing LED" effect
C1/R5 values affect breathing effect

With JUMPER JP1 open, and resistors R4/R6 populated, the 555 works as a classic astable – so output voltage switches between 2/3rd and 1/3rd supply
C1/R4/R6 values affect astable frequency

G1
Logo_MA

G2
Pin

LEGS
solder stiff copper wire pieces to form six legs

STING
solder short wire for sting



OPEN_HARDWARE_1

MAP6 @ git.io/J0GPd
Learn to Solder Maker's Asylum Badge
Maker's Asylum

Sheet: /
File: MAP6.sch

Title: MAP6

Size: A4 Date: 2021-08-16
KiCad E.D.A. kicad 5.1.9-73d0e3b20d88ubuntu20.04.1

Rev: 1
Id: 1/1